

MA3X200F

Silicon epitaxial planer type

For switching circuits


■ Features

- Two elements housed in one package, enabling high-density mounting
- Soft recovery characteristic (t_{rr} : 100ns)
- Small capacity between pins, C_t

■ Absolute Maximum Ratings (Ta= 25°C)


Parameter	Symbol	Rating	Unit
Reverse voltage (DC)	V_R	80	V
Peak reverse voltage	V_{RM}	80	V
Forward current (DC)	Single	100	mA
	Series	75	
Peak forward current	Single	225	mA
	Series	170	
Non-repetitive peak forward surge current	Single	500	mA
	Series	325	
Junction temperature	T_j	150	°C
Storage temperature	T_{stg}	- 55 to +150	°C

* $t=1s$

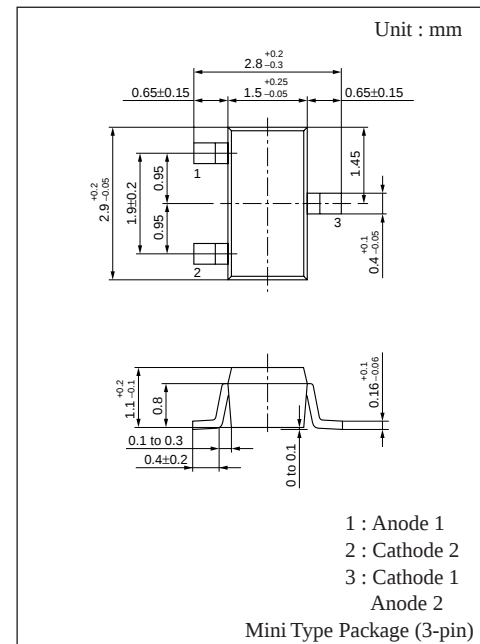

Marking Symbol : M5M

■ Internal Connection


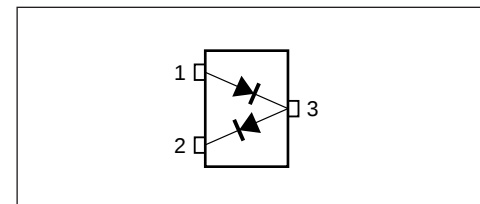


■ Electrical Characteristics (Ta= 25°C)

Parameter	Symbol	Condition	min	typ	max	Unit
Reverse current (DC)	I_{R1}	$V_R = 75V$			10	nA
	I_{R2}	$V_R = 5V, T_a = 85^\circ C$			20	nA
Forward voltage (DC)	V_F	$I_F = 100mA$			1.2	V
Reverse voltage (DC)	V_R	$I_R = 100\mu A$	80			V
Terminal capacitance	C_t	$V_R = 0V, f = 1MHz$			2.5	pF
Reverse recovery time	t_{rr}^*	$I_F = 10mA, V_R = 6V$ $I_{rr} = 0.1 \cdot I_R, R_L = 100\Omega$			100	ns





Note 1 : Rated input/output frequency : 100MHz

2 : * t_{rr} measuring circuit

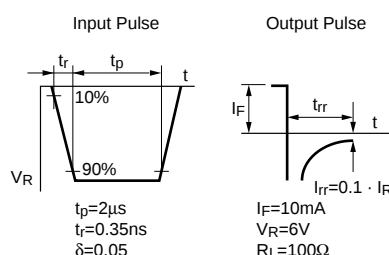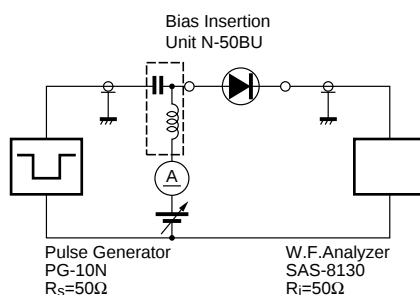

■ Marking

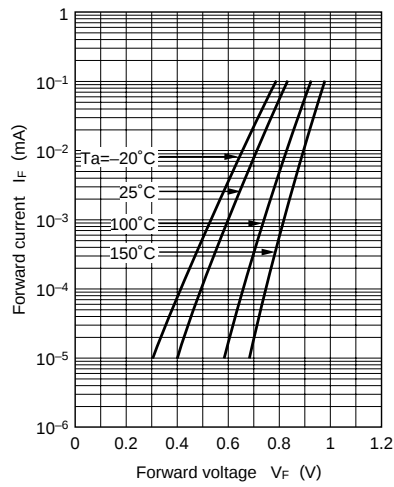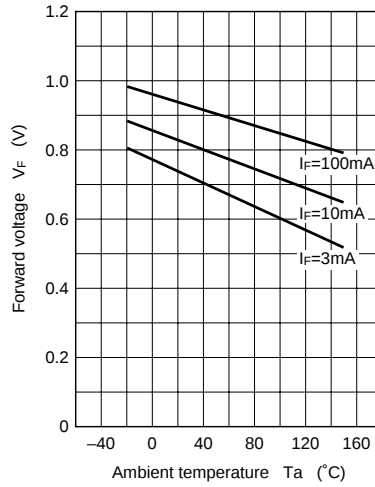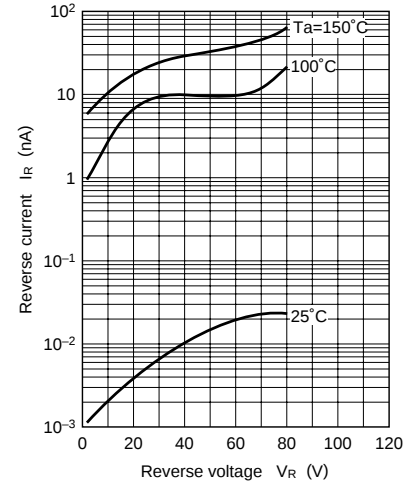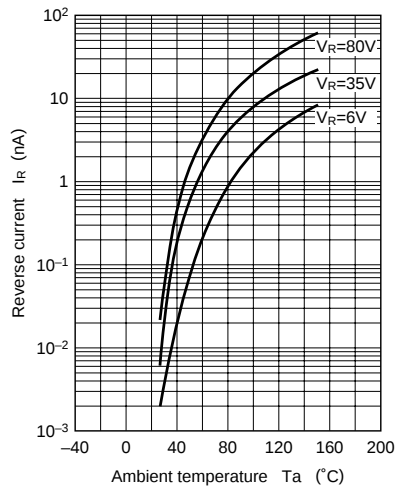

$I_F - V_F$  $V_F - T_a$  $I_R - V_R$  $I_R - T_a$  $C_t - V_R$ 