

MA4Z082WA

Silicon planer type

Constant voltage, constant current, waveform clipper and surge absorption circuit

■ Features

- SS-Mini type package (3-pin)
- Anode-common wiring of MA8082

■ Absolute Maximum Ratings (Ta= 25°C)

Parameter	Symbol	Rating	Unit
Average forward current	$I_{F(AV)}^{*1}$	100	mA
Instantaneous forward current	I_{FRM}^{*1}	200	mA
Total power dissipation	P_{tot}^{*2}	150	mW
Junction temperature	T_j	150	°C
Storage temperature	T_{stg}	− 55 to + 150	°C

*1 Working value in a single piece

*2 With a printed-circuit board

■ Electrical Characteristics (Ta= 25°C)*¹

Parameter	Symbol	Condition	min	typ	max	Unit
Forward voltage	V_F	$I_F=10mA$		0.9	1.0	V
Zener voltage	V_Z^{*2}	$I_Z=5mA$	7.70		8.70	V
Operating resistance	R_{ZK}	$I_Z=0.5mA$			120	Ω
	R_Z	$I_Z=5mA$			20	Ω
Reverse current	I_R	$V_R=5V$			0.1	μA
Temperature coefficient of zener voltage	S_Z^{*3}	$I_Z=5mA$		4.6		mV/°C

Note 1. Test method : Depend on JIS C7031 testing

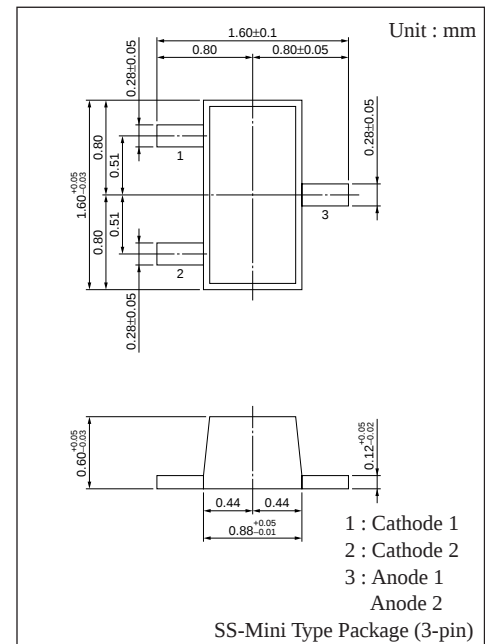
2. Rated input/output frequency : 5MHz

3. *¹ : The V_Z value is for the temperature of 25°C. In other cases, carry out the temperature compensation.


*² : Guaranteed at 20ms after power application





*³ : $T_j=25$ to 150°C

■ Marking



■ Internal Connection

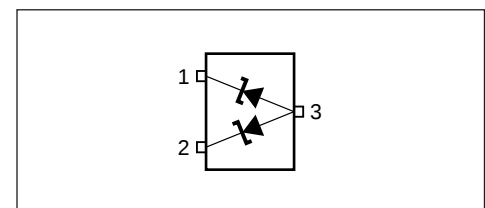

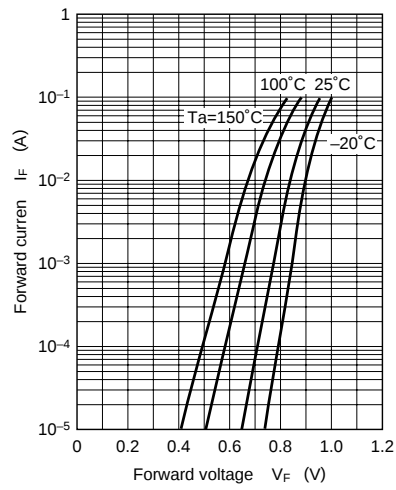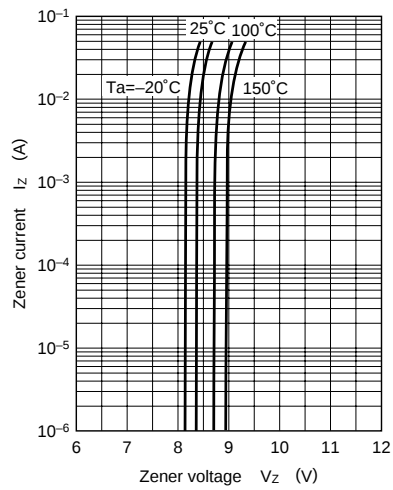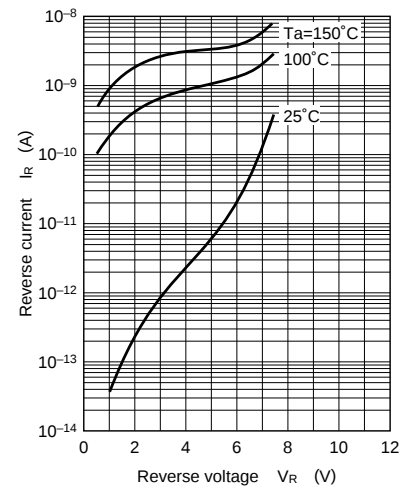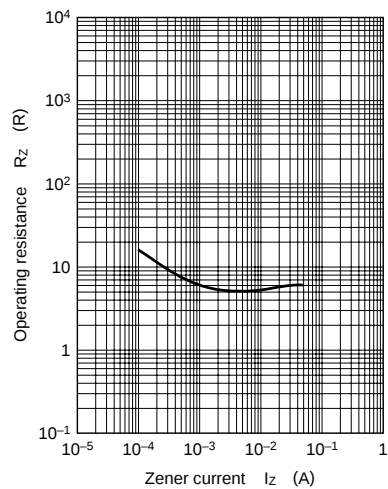$I_F - V_F$  $I_Z - V_Z$  $I_R - V_R$  $R_Z - I_Z$  $C_t - V_R$ 