

The NM2002-UA10A is a flat thin-film thermal printhead with a built-in heat history control function, suited for general purpose compact printers as well as label printers with printing speeds up to 10 inch / second.

●Applications

Bar code label printers


Ticket printers

General purpose compact printers

●Features

- 1) Special glazed components for high speed, high quality printing.
- 2) Our heat history control circuit reduces the load on the printer to control heat history.
- 3) Using a hard conductive film as a protective film on the heating element offers excellent resistance to electrostatic damage.

●External dimensions (Units: mm)

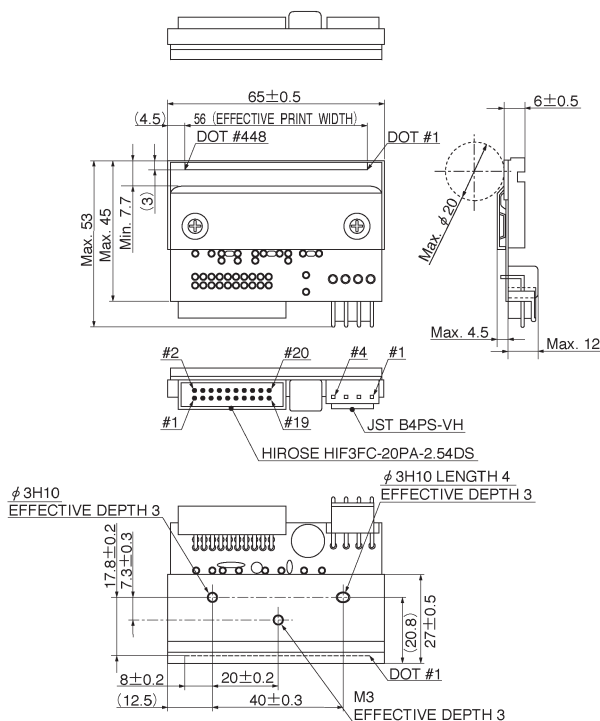

●Characteristics

Parameter	Symbol	Typical							Unit
Effective printing width	—	56							mm
Dot pitch	—	0.125							mm
Total dot number	—	448							dots
Average resistance value	Rave	550							Ω
Applied voltage	V _H	22.6							V
Applied power	P _O	0.8							W / dot
Print cycle	SLT	0.49							ms
Applied energy	LEVEL	1	2	3	4	5	6	—	
	E _O	0.36	0.33	0.27	0.23	0.23	0.19	mJ / dot	
Pulse width	Ton	0.45	0.41	0.34	0.29	0.29	0.24	ms	
Maximum number of dots energized simultaneously	—	448							dots
Maximum clock frequency	—	5							MHz
Maximum roller diameter	—	20							mm
Running life / pulse life	—	50 / 10 ⁸							km / pulses
Operating temperature	—	5~45							°C

●Level Map

	Print Pattern	On Time	SLT=0.49ms
Level 1	<div> <div>□□□</div> <div>□□□</div> <div>□●□</div> </div>	Ton a	0.450 ms
Level 2	<div> <div>□□□</div> <div>□□□</div> <div>□●■</div> </div> <div> <div>□□□</div> <div>□□□</div> <div>■●□</div> </div> <div> <div>□□□</div> <div>□□□</div> <div>■●■</div> </div>	Ton b	0.410 ms
Level 3	<div> <div>□■□</div> <div>□□□</div> <div>□●□</div> </div>	Ton c	0.34 ms
Level 4	<div> <div>□■□</div> <div>□□□</div> <div>□●■</div> </div> <div> <div>□■□</div> <div>□□□</div> <div>■●□</div> </div> <div> <div>□■□</div> <div>□□□</div> <div>■●■</div> </div>	Ton d	0.29 ms
Level 5	<div> <div>□□□</div> <div>□■□</div> <div>□●□</div> </div> <div> <div>□■□</div> <div>□■□</div> <div>□●□</div> </div>	Ton e	0.29 ms
Level 6	<div> <div>□□□</div> <div>□■□</div> <div>□●■</div> </div> <div> <div>□■□</div> <div>□■□</div> <div>□●■</div> </div> <div> <div>□□□</div> <div>□■□</div> <div>□■□</div> </div> <div> <div>□■□</div> <div>□■□</div> <div>■●□</div> </div> <div> <div>□■□</div> <div>□■□</div> <div>■●■</div> </div>	Ton f	0.240 ms

□: Heated dot.

■: Non-heated dot.

●: Dot to be printed.

This table shows a simple example. In actuality, the history of the previous level and the level before of the adjacent dots are included.

●Pin assignments

HIROSE

No.	Circuit	No.	Circuit
1	GND	11	CLK
2	N.C.	12	DI
3	N.C.	13	START
4	N.C.	14	LOAD
5	V _{DD}	15	RESET
6	V _{DD}	16	DO
7	INC	17	STB2
8	SET	18	STB1
9	E-OUT	19	TM
10	OR-ON	20	TM

JST

No.	Circuit
1	COM
2	COM
3	GND
4	GND

Added functions

SET: Sets all data to “HIGH”. (Usable for preheating, etc.)

OR-ON: Set at “HIGH” when considering the adjoining of the previous columns; otherwise set at “LOW”.

E-OUT: Outputs “HIGH” when a data transmission error occurs inside the head.

INC: Supports the increment function from level 1 to level 6. One level is incremented for one pulse. (See Fig. 2)

RESET: Sets all data at “LOW”. Clears data when printing is resumed after a pause. (See Fig. 2)

Note: Signals of SET, INC, START, and RESET detect the falling edge; the START signal transmits data to the driver IC at the falling edge and latches at the rising edge.

For two-part split printing, enter INC after 34μ seconds of START7. (See Fig. 2)

●Timing chart

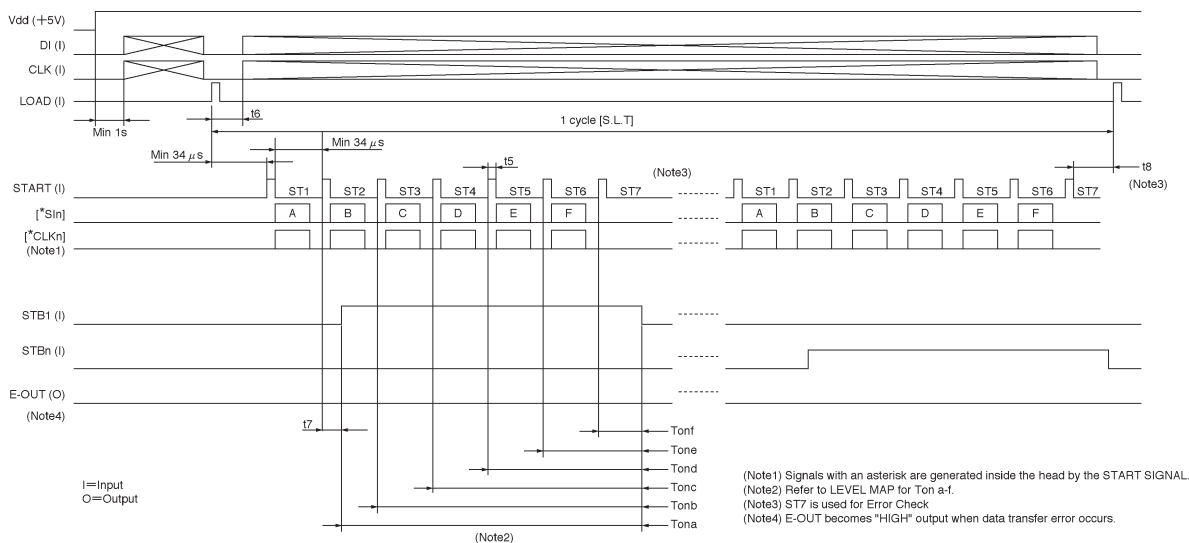


Fig.1

● Timing chart

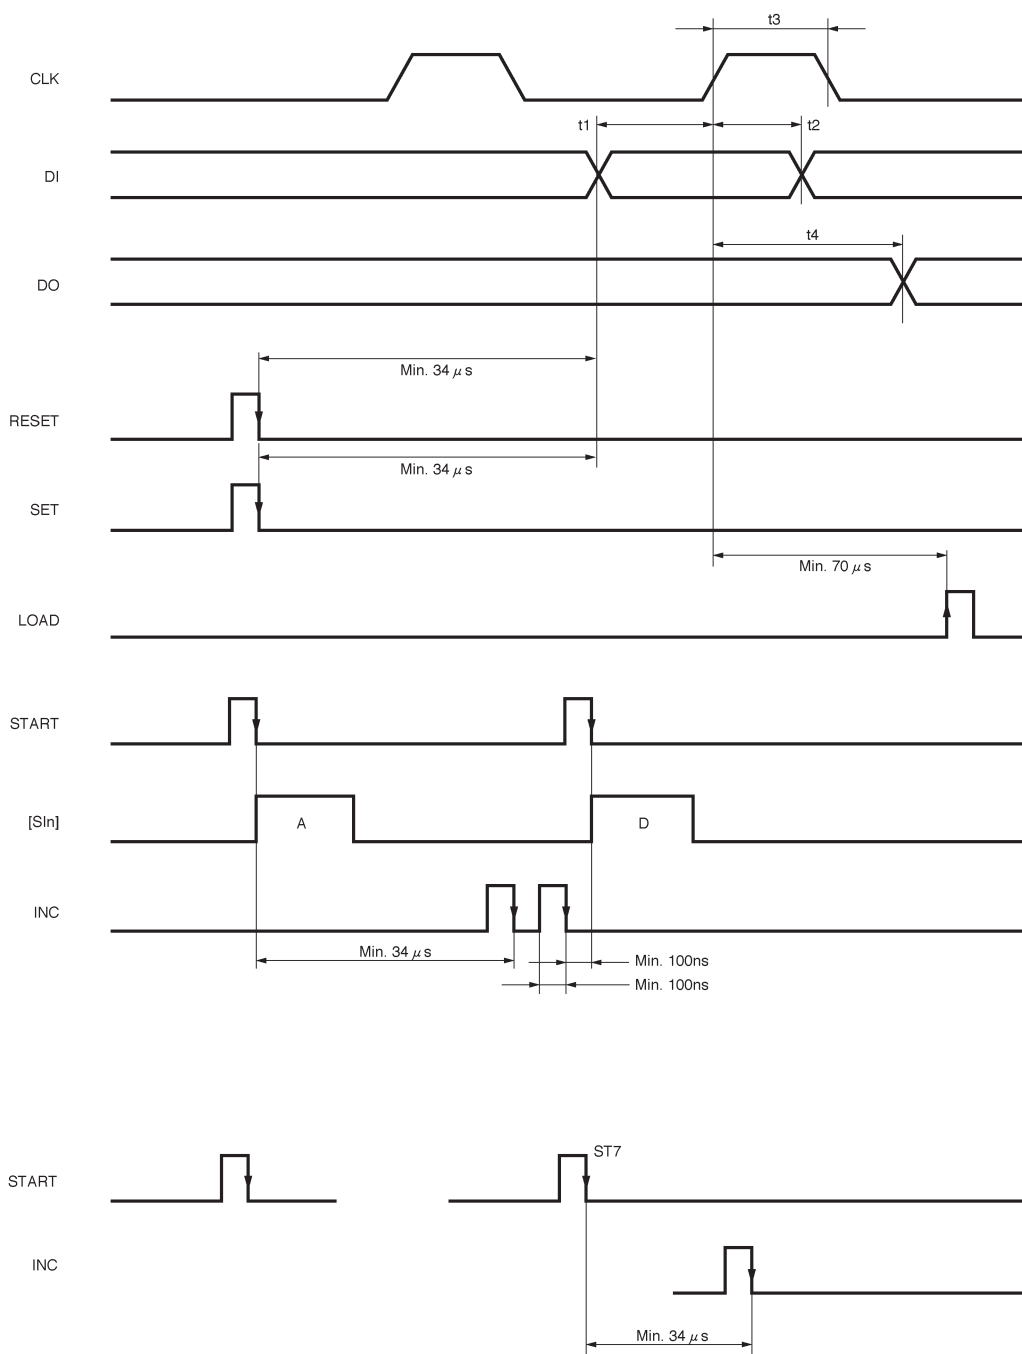


Fig.2

●Equivalent circuit

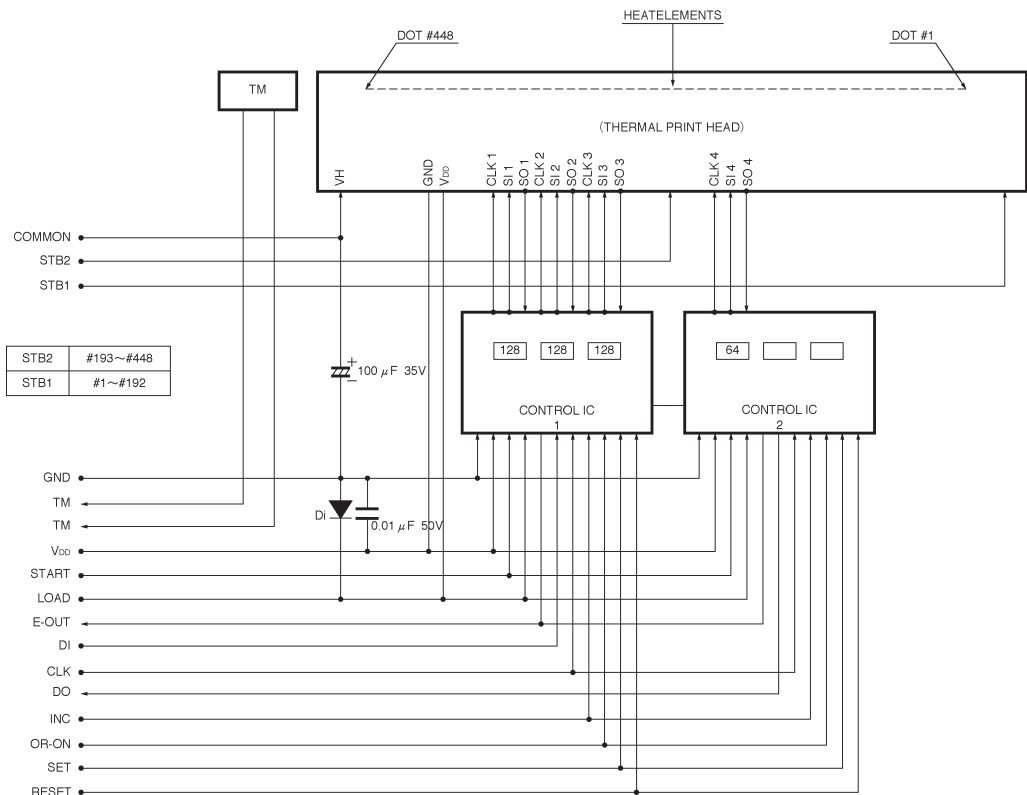


Fig. 3

●Supported speeds chart

Inch / second [IPS]											OVER
0	1	2	3	4	5	6	7	8	9	10	

Internal heat history control

●Electrical characteristic curves

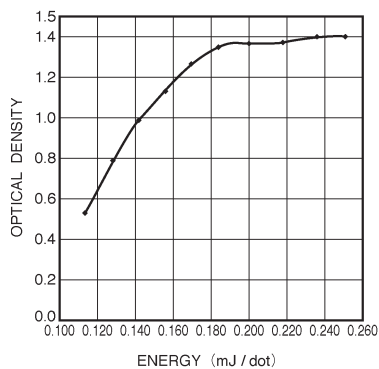


Fig. 4 Representative density curve

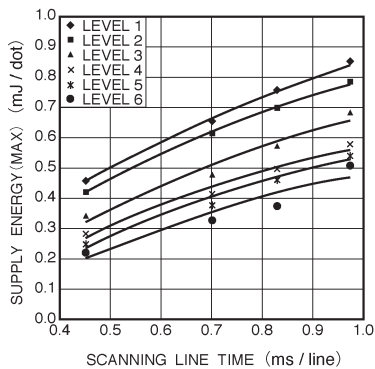


Fig. 5 Maximum energy curve

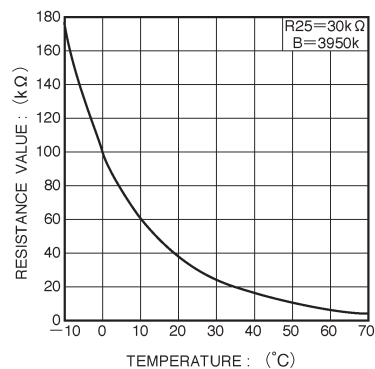


Fig. 6 Thermistor curve