

The NM2004-UA10A is a flat thin-film thermal printhead with a built-in heat history control function, suited for general purpose compact printers as well as label printers with printing speeds up to 10 inch / second.

●Applications

Bar code label printers

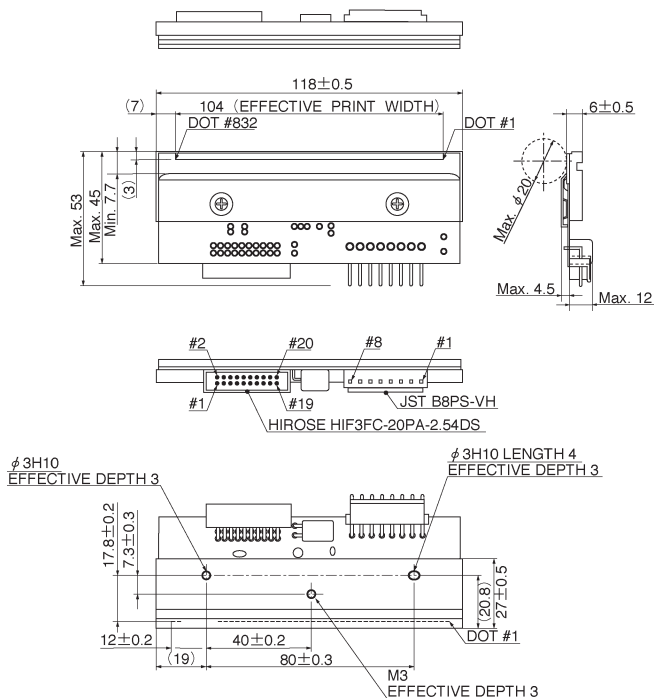
Ticket printers

General purpose compact printers

●Features

- 1) Special glazed components for high speed, high quality printing.
- 2) Our heat history control circuit reduces the load on the printer to control heat history.
- 3) Using a hard conductive film as a protective film on the heating element offers excellent resistance to electrostatic damage.

















●External dimensions (Units: mm)



●Characteristics

Parameter	Symbol	Typical							Unit
Effective printing width	—	104							mm
Dot pitch	—	0.125							mm
Total dot number	—	832							dots
Average resistance value	R _{ave}	550							Ω
Applied voltage	V _H	24.3							V
Applied power	P _O	0.780							W / dot
Print cycle	SLT	0.49							ms
Applied energy	LEVEL	1	2	3	4	5	6	—	
	E _O	0.36	0.33	0.27	0.23	0.23	0.19	mJ / dot	
Pulse width	T _{ON}	0.46	0.42	0.35	0.29	0.29	0.25	ms	
Maximum number of dots energized simultaneously	—	832							dots
Maximum clock frequency	—	5							MHz
Maximum roller diameter	—	20							mm
Running life / pulse life	—	50 / 10 ⁸							km / pulses
Operating temperature	—	5~45							°C

●Level map

	Print Pattern	On Time	SLT=0.49ms
Level 1		Ton a	0.46 ms
Level 2	  	Ton b	0.42 ms
Level 3		Ton c	0.35 ms
Level 4	  	Ton d	0.29 ms
Level 5	 	Ton e	0.29 ms
Level 6	     	Ton f	0.25 ms

■: Heated dot.
 □: Non-heated dot.
 ●: Dot to be printed.

This table shows a simple example. In actuality, the history of the previous level and the level before of the adjacent dots are included.

●Pin assignments

HIROSE

No.	Circuit	No.	Circuit
1	GND	11	CLK
2	N.C.	12	DI
3	N.C.	13	START
4	N.C.	14	LOAD
5	V _{DD}	15	RESET
6	V _{DD}	16	DO
7	INC	17	STB2
8	SET	18	STB1
9	E-OUT	19	TM
10	OR-ON	20	TM

JST

No.	Circuit
1	VH
2	VH
3	VH
4	VH
5	GND
6	GND
7	GND
8	GND

Added functions

SET :Sets all data to “HIGH”. (Usable for preheating, etc.)

OR-ON :Set at “HIGH” when considering the adjoining of the previous columns; otherwise set at “LOW”.

E-OUT :Outputs “HIGH” when a data transmission error occurs inside the head.

INC :Supports the increment function from level 1 to level 6. One level is incremented for one pulse. (See Fig. 2)

RESET :Sets all data at “LOW”. Clears data when printing is resumed after a pause. (See Fig. 2)

Note:Signals of SET, INC, START, and RESET detect the falling edge; the START signal transmits data to the driver IC at the falling edge and latches at the rising edge.

For two-part split printing, enter INC after 34 μ s seconds of START7. (See Fig. 2)

●Timing chart

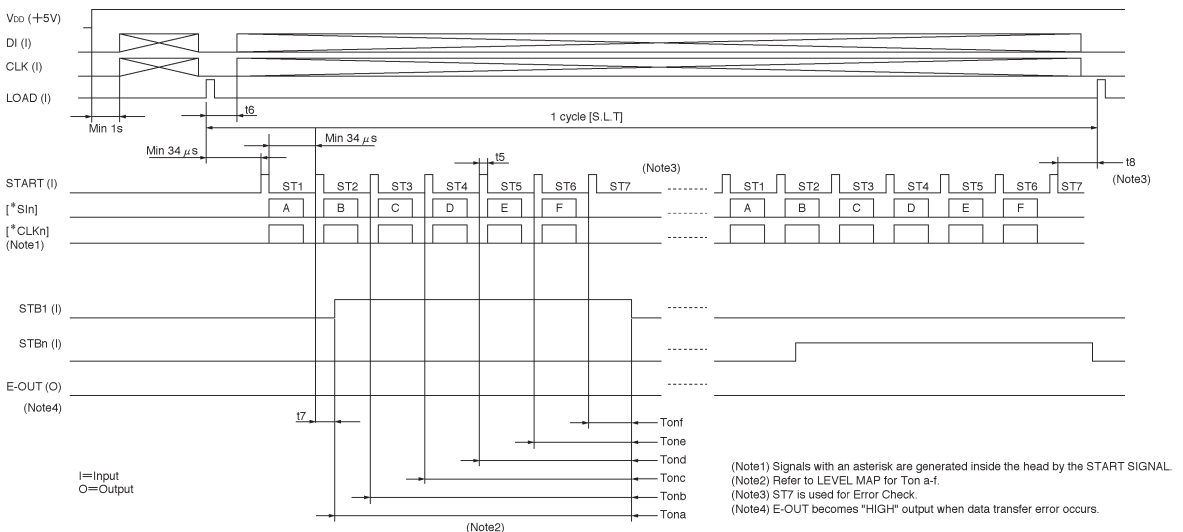


Fig.1

●Timing chart

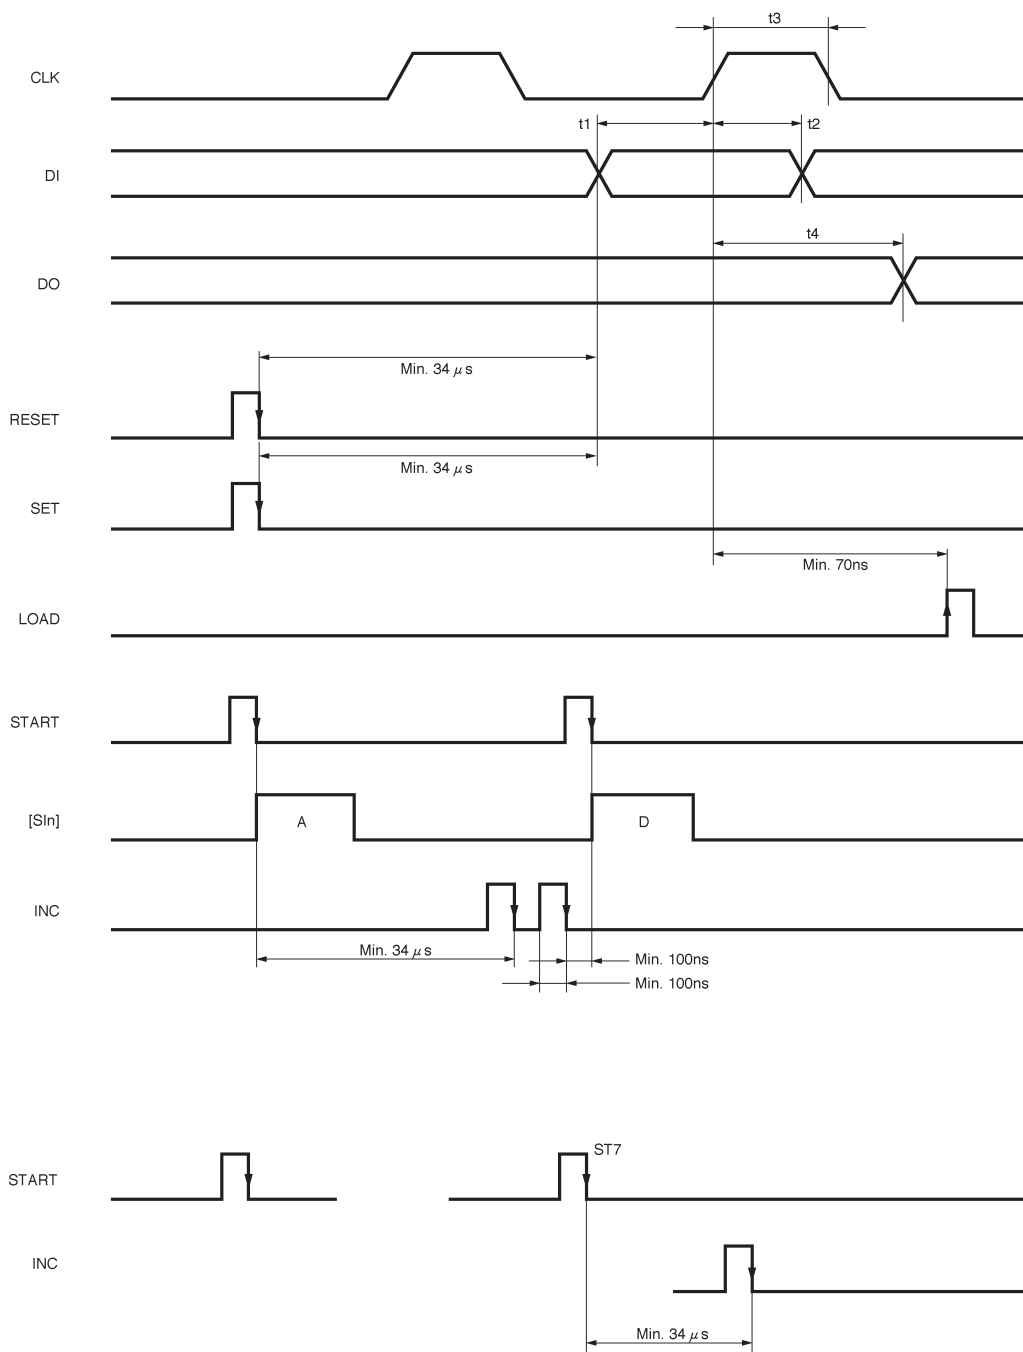


Fig.2

●Equivalent circuit

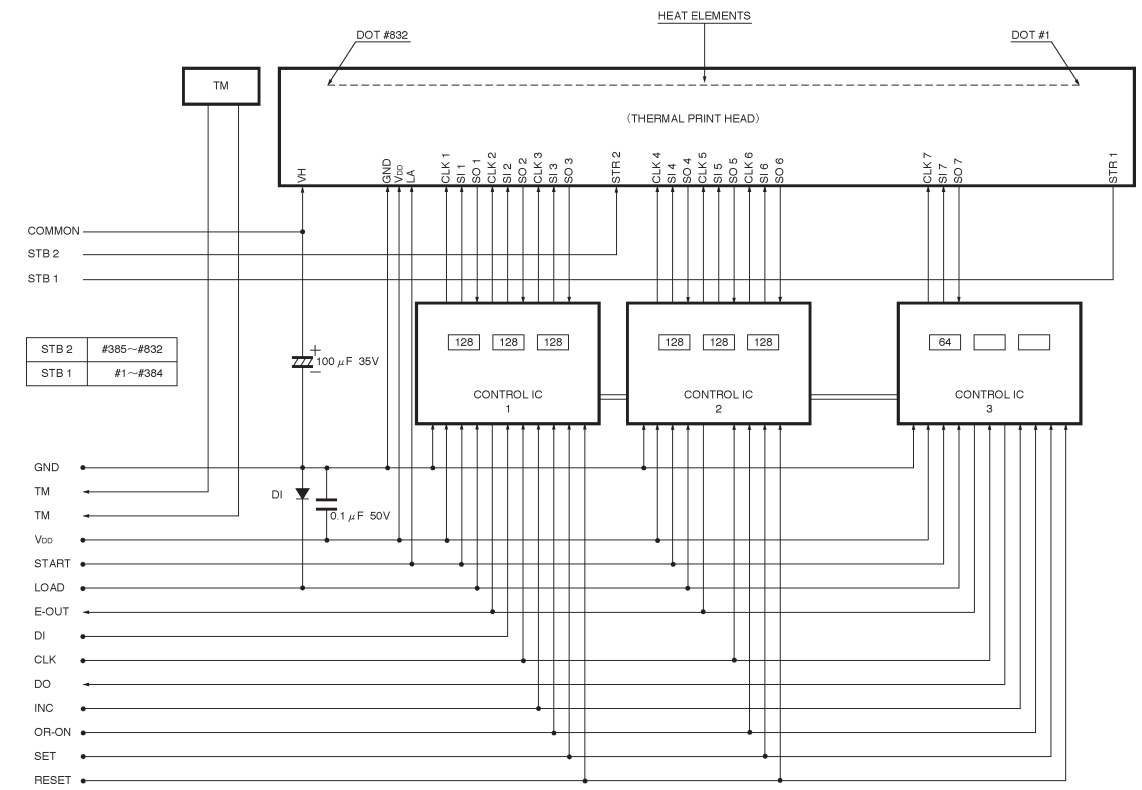
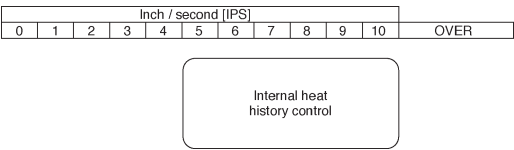


Fig. 3

●Supported speeds chart



●Electrical characteristic curves

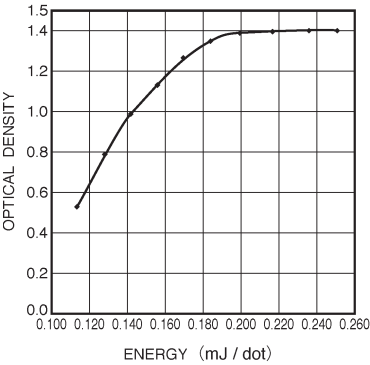


Fig. 4 Representative density curve

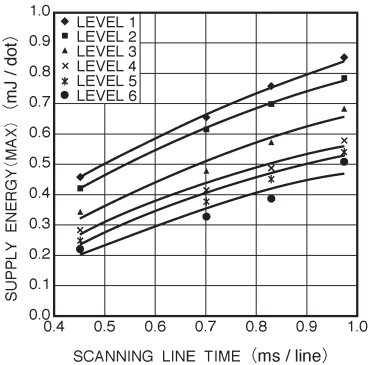


Fig. 5 Maximum energy curve

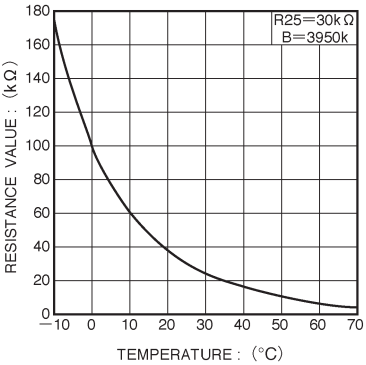


Fig. 6 Thermistor curve