


SURFACE MOUNT LOW DROPOUT POSITIVE FIXED VOLTAGE REGULATORS



Three Terminal, Low Dropout, Positive Fixed
Voltage, 7.5A, 5A, 3A And 1.5A Regulators

FEATURES

- Hermetic Surface Mount Package
- Operates Down To 1V Dropout, 1.5V @ Max. Current
- .015% Line Regulation
- .01% Load Regulation
- 1% Reference Voltage
- Electrically Equivalent To LT1083, 84, 85, And 86
- Available Hi-Rel Screened


DESCRIPTION

These three terminal positive fixed voltage regulators in surface mount packages are designed to provide 7.5A, 5A, 3A, and 1.5A with higher efficiency than conventional voltage regulators. These devices are designed to operate to 1 Volt input to output differential and the dropout voltage is specified as a function of load current. These devices are ideally suited for Hi-Rel applications where surface mount, small size, hermeticity and high reliability are required.


ABSOLUTE MAXIMUM RATINGS @ 25°C

Input Voltage	35V
Operating Junction Temperature Range	- 55°C to + 150°C
Storage Temperature	- 65°C to + 150°C
Output Current - OM183-5, 12, 15NM	7.5A
OM184-5, 12, 15NM	5A
OM185-5, 12, 15NM	3A
OM186-5, 12, 15NM	1.5A

MECHANICAL OUTLINE

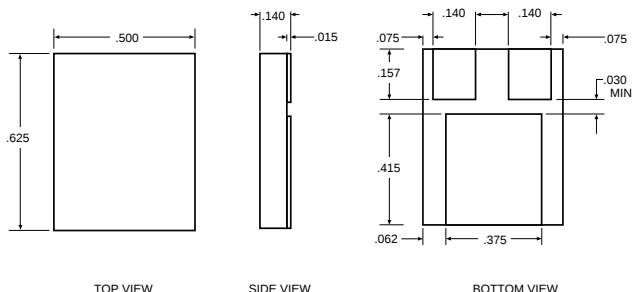

PIN CONNECTION



Pin 1: V_{IN}
Pin 2: Ground
Pin 3: V_{OUT}

3.5

OM183-5NM - OM186-15NM

ELECTRICAL CHARACTERISTICS ($T_c = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Conditions	Min.	Typ.	Max.	Units
Output Voltage					
OM183/4/5/6 - 5 V	$I_{OUT} = 0 \text{ mA}$, $T_j = 25^\circ\text{C}$, $V_{IN} = 8 \text{ V}$	4.95	5.0	5.05	V
	$0 \leq I_{OUT} \leq I_{FULL_LOAD}$, $6.5 \text{ V} \leq V_{IN} \leq 30 \text{ V}$	• 4.90	5.0	5.10	V
OM183/4/5/6 - 12 V	$I_{OUT} = 0 \text{ mA}$, $T_j = 25^\circ\text{C}$, $V_{IN} = 15 \text{ V}$	11.88	12.0	12.12	V
	$0 \leq I_{OUT} \leq I_{FULL_LOAD}$, $13.5 \text{ V} \leq V_{IN} \leq 30 \text{ V}$	• 11.76	12.0	12.24	V
OM183/4/5/6 - 15 V	$I_{OUT} = 0 \text{ mA}$, $T_j = 25^\circ\text{C}$, $V_{IN} = 20 \text{ V}$	14.85	15.0	15.15	V
	$0 \leq I_{OUT} \leq I_{FULL_LOAD}$, $17.5 \text{ V} \leq V_{IN} \leq 30 \text{ V}$	• 14.70	15.0	15.30	V
Line Regulation					
OM183/4/5/6 - 5 V	$I_{OUT} = 0 \text{ mA}$, $T_j = 25^\circ\text{C}$, $6.5 \text{ V} \leq V_{IN} \leq 20 \text{ V}$		0.5	10	mV
			1.0	10	mV
	$6.5 \text{ V} \leq V_{IN} \leq 30 \text{ V}$	•	2.0	25	mV
OM183/4/5/6 - 12 V	$I_{OUT} = 0 \text{ mA}$, $T_j = 25^\circ\text{C}$, $13.5 \text{ V} \leq V_{IN} \leq 25 \text{ V}$		1.0	25	mV
			2.0	25	mV
	$13.5 \text{ V} \leq V_{IN} \leq 30 \text{ V}$	•	4.0	60	mV
OM183/4/5/6 - 15 V	$I_{OUT} = 0 \text{ mA}$, $T_j = 25^\circ\text{C}$, $17.5 \text{ V} \leq V_{IN} \leq 25 \text{ V}$		2.0	50	mV
			4.0	50	mV
	$17.5 \text{ V} \leq V_{IN} \leq 30 \text{ V}$	•	8.0	100	mV
Load Regulation					
OM183/4/5/6 - 5 V	$V_{IN} = 8 \text{ V}$, $0 \leq I_{OUT} \leq I_{FULL_LOAD}$, $T_j = 25^\circ\text{C}$		5	20	mV
		•	10	35	mV
OM183/4/5/6 - 12 V	$V_{IN} = 15 \text{ V}$, $0 \leq I_{OUT} \leq I_{FULL_LOAD}$, $T_j = 25^\circ\text{C}$		12	36	mV
		•	24	72	mV
OM183/4/5/6 - 15 V	$V_{IN} = 20 \text{ V}$, $0 \leq I_{OUT} \leq I_{FULL_LOAD}$, $T_j = 25^\circ\text{C}$		20	40	mV
		•	40	100	mV
Current Limit					
OM183 - 5 V	$V_{IN} = 10 \text{ V}$	8.0	9.5		A
OM183 - 12 V	$V_{IN} = 17 \text{ V}$	8.0	9.5		A
OM183 - 15 V	$V_{IN} = 20 \text{ V}$	8.0	9.5		A
OM184 - 5 V	$V_{IN} = 10 \text{ V}$	5.5	6.5		A
OM184 - 12 V	$V_{IN} = 17 \text{ V}$	5.5	6.5		A
OM184 - 15 V	$V_{IN} = 20 \text{ V}$	5.5	6.5		A
OM185 - 5 V	$V_{IN} = 10 \text{ V}$	3.2	4.0		A
OM185 - 12 V	$V_{IN} = 17 \text{ V}$	3.2	4.0		A
OM185 - 15 V	$V_{IN} = 20 \text{ V}$	3.2	4.0		A
OM186 - 5 V	$V_{IN} = 10 \text{ V}$	1.5	1.8		A
OM186 - 12 V	$V_{IN} = 17 \text{ V}$	1.5	1.8		A
OM186 - 15 V	$V_{IN} = 20 \text{ V}$	1.5	1.8		A
Dropout Voltage					
OM183/4/5/6 - 5 V	$\Delta V_{OUT} = 50 \text{ mV}$, $I_{OUT} = I_{FULL_LOAD}$		6.3	6.5	V
OM183/4/5/6 - 12 V	$\Delta V_{OUT} = 120 \text{ mV}$, $I_{OUT} = I_{FULL_LOAD}$		13.3	13.5	V
OM183/4/5/6 - 15 V	$\Delta V_{OUT} = 180 \text{ mV}$, $I_{OUT} = I_{FULL_LOAD}$		17.3	17.5	V
Quiescent Current	$V_{IN} = 30 \text{ V}$		5.0	14.0	mA
Thermal Regulation	$T_A = 25^\circ\text{C}$, 30 ms pulse				
OM183 - 5/12/15 V			0.002	0.01	%/W
OM184 - 5/12/15 V			0.003	0.015	%/W
OM185 - 5/12/15 V			0.004	0.02	%/W
OM186 - 5/12/15 V			0.008	0.04	%/W
Ripple Rejection	$f = 120 \text{ Hz}$, $C_{OUT} = 25 \mu\text{F}$ Tantalum				
	$I_{OUT} = I_{FULL_LOAD}$				
OM183/4/5/6 - 5 V	$V_{IN} = 8 \text{ V}$		63		dB
OM183/4/5/6 - 12 V	$V_{IN} = 15 \text{ V}$		55		dB
OM183/4/5/6 - 15 V	$V_{IN} = 20 \text{ V}$		60		dB
Thermal Resistance	Junction-To-Case			2.1	$^\circ\text{C/W}$
	OM183 - 5/12/15NM			3.1	$^\circ\text{C/W}$
	OM184 - 5/12/15NM			4.1	$^\circ\text{C/W}$
	OM185 - 5/12/15NM			5.3	$^\circ\text{C/W}$
	OM186 - 5/12/15NM				
Lead Temperature	5 Seconds at Case			225	$^\circ\text{C}$

The • denotes the specifications which apply over the full operating temperature range.