


3 AMP NEGATIVE ADJUSTABLE REGULATOR APPROVED TO DESC DRAWING 5962-87741



Three Terminal, Negative Adjustable Voltage Regulator In Hermetic Packages

FEATURES

- Similar To Industry Standard LT1033
- Approved To DESC Standardized Military Drawing Number 5962-8774101
- Adjustable Output Voltage
- Built In Thermal Overload Protection
- Short Circuit Current Limiting
- Maximum Output Voltage Tolerance is Guaranteed To $\pm 1\%$
- Guaranteed Dropout Voltage At Multiple Current Levels
- TO-257 Available in Isolated and Non-Isolated Packages

DESCRIPTION

This three terminal negative adjustable voltage regulator is designed to provide 3A with higher efficiency than conventional voltage regulators. This device is designed to operate down to 1 Volt input to output differential and the dropout voltage is fully specified as a function of load current. Supplied in easy-to-use hermetic TO-257 and TO-3, this device is ideally suited for Military applications where small size and high reliability is required.

ABSOLUTE MAXIMUM RATINGS @ 25°C

Power Dissipation (P_d)	Internally Limited
Input - Output Voltage Differential	35 V
Operating Junction Temperature Range	- 55°C to + 150°C
Storage Temperature Range	- 65°C to + 150°C
Lead Temperature (Soldering 10 seconds)	300°C
Thermal Resistance Junction to Case:	
(TO-257, Isolated)	3.5°C/W
(TO-257, Non-Isolated)	2.3°C/W
(TO-3)	3.0°C/W
Recommended Operating Conditions:	
Output Voltage Range	-3V to -15 V
Ambient Operating Temperature Range (T_A)	- 55°C to + 125°C
Input Voltage Range	- 5V to -35 V


3.3

ELECTRICAL CHARACTERISTICS $-55^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$ (unless otherwise specified)

Parameter	Symbol	Test Conditions	Min.	Max.	Unit
Reference Voltage	V_{REF}	$ V_{\text{IN}} - V_{\text{OUT}} = 5\text{ V}, I_{\text{OUT}} = 5\text{ mA}, T_A = 25^{\circ}\text{C}$	-1.238	-1.262	V
		$3\text{ V} \leq V_{\text{IN}} - V_{\text{OUT}} \leq 35\text{ V}$	• -1.215	-1.285	
Line Regulation (Note 1)	$\frac{\Delta V_{\text{OUT}}}{\Delta V_{\text{IN}}}$	$3\text{ V} \leq V_{\text{IN}} - V_{\text{OUT}} \leq 35\text{ V}$		0.015	%V
			•	0.04	
Load Regulation (Note 1)	$\frac{\Delta V_{\text{OUT}}}{\Delta I_{\text{OUT}}}$	$ V_{\text{OUT}} \leq 5\text{ V}, T_A = 25^{\circ}\text{C}$		50	mV
			•	75	
		$ V_{\text{OUT}} \geq 5.0\text{ V}$		1.0	%
			•	1.5	
Thermal Regulation	-	30 ms pulse, $T_A = 25^{\circ}\text{C}$		0.02	%/W
Ripple Rejection (Note 2)	$\frac{\Delta V_{\text{IN}}}{\Delta V_{\text{REF}}}$	$ V_{\text{OUT}} = -10\text{ V}, f = 120\text{ Hz}, C_{\text{Adj}} = 0$		56	dB
			•	53	
		$ V_{\text{OUT}} = -10\text{ V}, f = 120\text{ Hz}, C_{\text{Adj}} = 10\text{ }\mu\text{F}$		70	dB
			•	60	
Adjust Pin Current	I_{Adj}	$V_{\text{DIFF}} = 35\text{ V}, I_L = 10\text{ mA}$	•	100	μA
Adjust Pin Current Change	ΔI_{Adj}	$10\text{ mA} \leq I_{\text{OUT}} \leq I_{\text{MAX}}$	•	2.0	μA
		$3\text{ V} \leq V_{\text{IN}} - V_{\text{OUT}} \leq 35\text{ V}$	•	5.0	
Minimum Load Current	I_{Min}	$ V_{\text{IN}} - V_{\text{OUT}} \leq 35\text{ V}$	•	5.0	mA
		$ V_{\text{IN}} - V_{\text{OUT}} \leq 10\text{ V}$	•	3.0	
Current Limit	I_{Lim}	$ V_{\text{IN}} - V_{\text{OUT}} \leq 10\text{ V}$		3.0	A
			•	3.0	
		$ V_{\text{IN}} - V_{\text{OUT}} = 35\text{ V}$		0.5	A
			•	0.5	
Temperature Stability (Note 2)	$\frac{\Delta V_{\text{OUT}}}{\Delta T}$	$-55^{\circ}\text{C} \leq T_J \leq +125^{\circ}\text{C}$	•	1.5	%
Long Term Stability (Note 2)	$\frac{\Delta V_{\text{OUT}}}{\Delta T}$	$T_A = +125^{\circ}\text{C}, t = 1000\text{ hrs}$		1.0	%


Notes:

- Line and Load Regulation are measured at a constant junction temperature using a low duty cycle pulse technique. Although power dissipation is internally limited, regulation is guaranteed up to the maximum power dissipation of 30 W. Power dissipation is determined by the input/output differential voltage and the output current. Guaranteed maximum power dissipation will not be available over the full input/output voltage range.
- Guaranteed by design, characterization or correlation to other tested parameters.
- The • denotes the specifications which apply over the full operating temperature range.

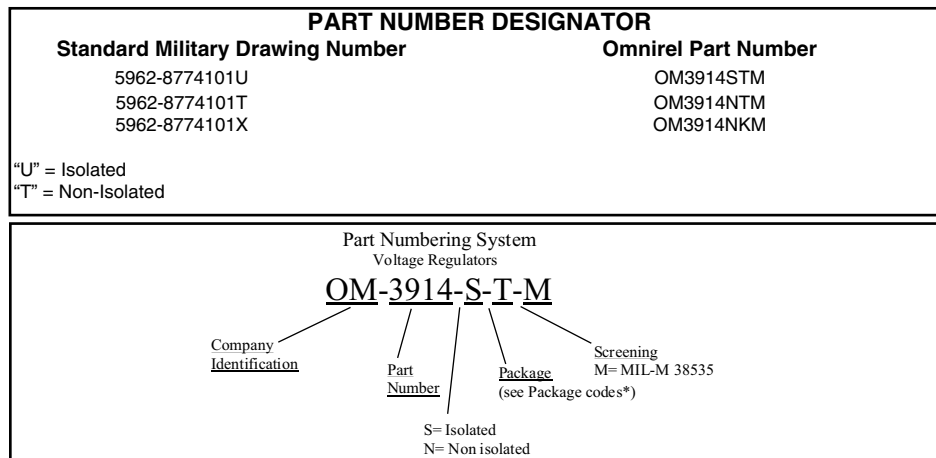
3.3

TYPICAL PERFORMANCE CHARACTERISTICS


DROPOUT VOLTAGE

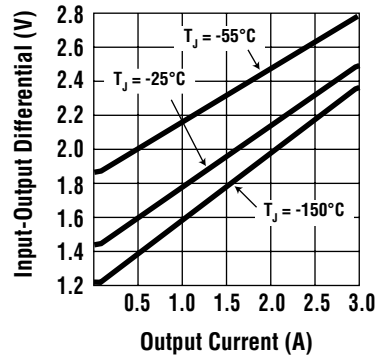


TEMPERATURE STABILITY

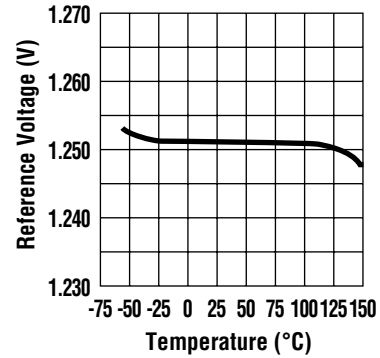


MINIMUM LOAD CURRENT

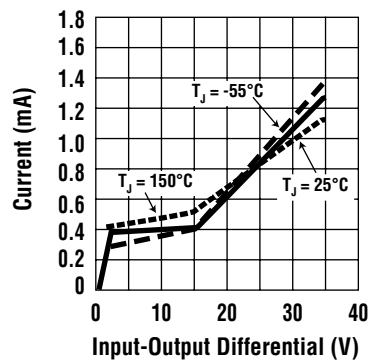


RIPPLE REJECTION

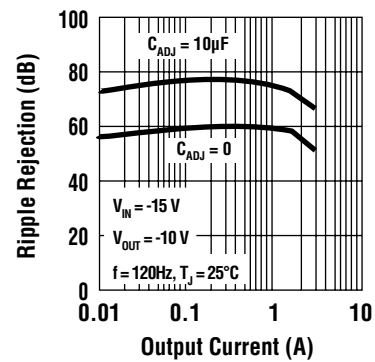

LOAD REGULATION

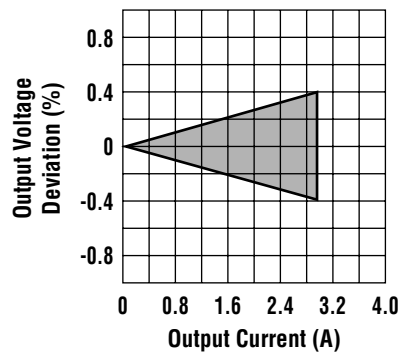


GUARANTEED MINIMUM OUTPUT CURRENT

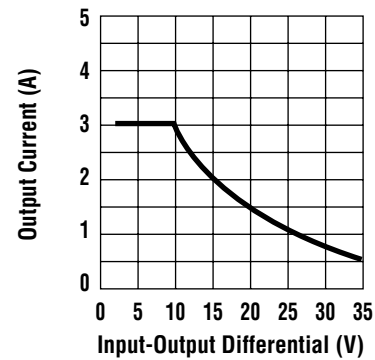


3.3


TYPICAL APPLICATIONS

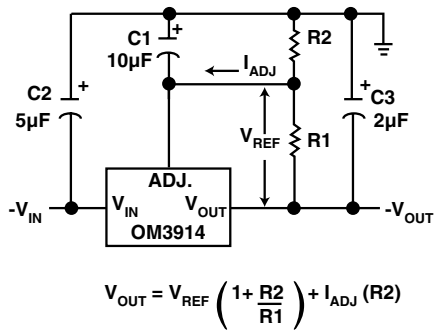


HIGH STABILITY REGULATOR

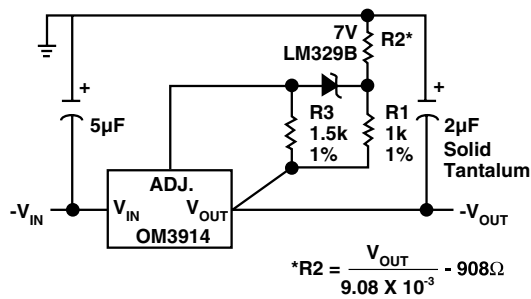


MULTIPLE TRACKING REGULATORS

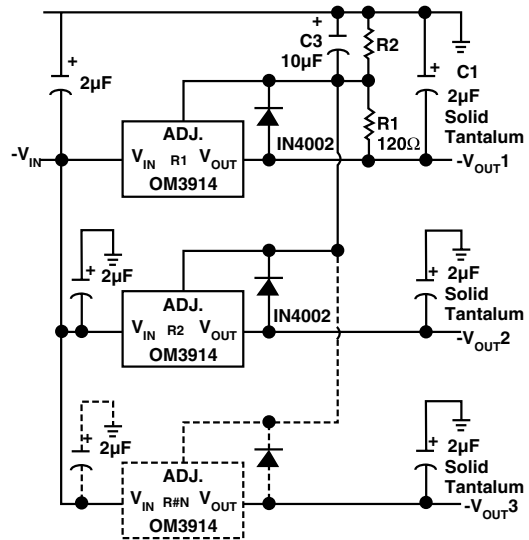

MECHANICAL OUTLINES

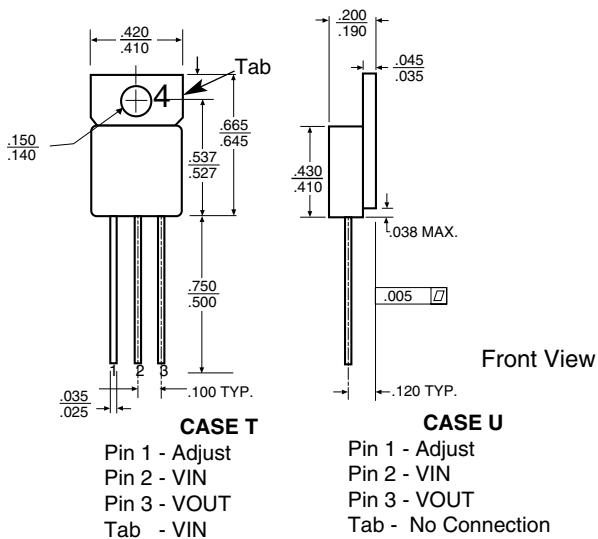

TO-3

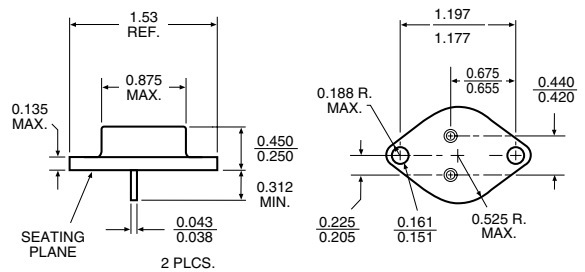

OM3914NKM

Pin 1 - Adjust
Pin 2 - Vout
Case - Vin

NOTES:

- Case is metal/hermetically sealed
- Isolated Tab