1.8mm SOLID STATE LAMP

L-2060GD

GREEN


Features

- •1.8mm DIAMETER SMALL SIZE LED LAMP.
- •ULTRA BRIGHTNESS IS AVAILABLE.
- •RELIABLE AND RUGGED.
- •VERSATILE MOUNTING ON P.C. BOARD OR PANEL.
- •AVAILABLE IN DIFFUSED LENS.
- •RoHS COMPLIANT.

Description

The Green source color devices are made with Gallium Phosphide Green Light Emitting Diode.

Package Dimensions

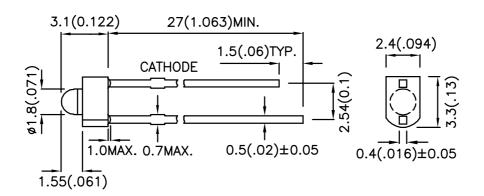

- 1. All dimensions are in millimeters (inches).
- 2. Tolerance is $\pm 0.25 (0.01")$ unless otherwise noted.
- 3. Lead spacing is measured where the leads emerge from the package.4. Specifications are subject to change without notice.

SPEC NO: DSAA5505 **REV NO: V.6** DATE: MAR/21/2005 PAGE: 1 OF 3 APPROVED: J. Lu **CHECKED: Allen Liu** DRAWN: B.H.LI

Kingbright

Selection Guide

Part No.	Dice	Dice Lens Type		Iv (mcd) @ 10mA	
			Min.	Тур.	201/2
L-2060GD	GREEN (GaP)	GREEN DIFFUSED	5	10	70°

Electrical / Optical Characteristics at Ta=25°C

Symbol	Parameter	Device	Тур.	Max.	Units	Test Conditions
λpeak	Peak Wavelength	Green	565		nm	IF=20mA
λD	Dominant Wavelength	Green	568		nm	IF=20mA
Δλ1/2	Spectral Line Half-width	Green	30		nm	IF=20mA
С	Capacitance	Green	15		pF	VF=0V;f=1MHz
VF	Forward Voltage	Green	2.2	2.5	V	IF=20mA
lr	Reverse Current	Green		10	uA	VR = 5V

Absolute Maximum Ratings at Ta=25°C

Parameter	meter Green			
Power dissipation	105	mW		
DC Forward Current	25	mA		
Peak Forward Current [1]	140	mA		
Reverse Voltage	5	V		
Operating/Storage Temperature	-40°C To +85°C			
Lead Solder Temperature [2]	260°C For 3 Seconds			
Lead Solder Temperature [3]	260°C For 5 Seconds			

- 1. 1/10 Duty Cycle, 0.1ms Pulse Width.
- 2. 2mm below package base.
 5mm below package base.


SPEC NO: DSAA5505 **REV NO: V.6** DATE: MAR/21/2005 PAGE: 2 OF 3 DRAWN: B.H.LI

APPROVED: J. Lu

CHECKED: Allen Liu

^{1.} θ 1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.


Kingbright

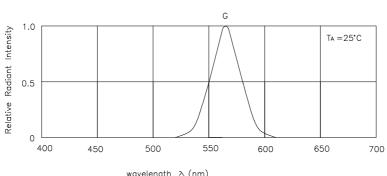



 $\label{eq:wavelength} \mbox{wavelength} \ \ \, \mbox{\wedge (nm)$} \\ \mbox{RELATIVE INTENSITY Vs. WAVELENGTH}$


Green


L-2060GD











Remarks:

If special sorting is required (e.g. binning based on forward voltage, luminous intensity, or wavelength), the typical accuracy of the sorting process is as follows:

- 1. Wavelength: +/-1nm
- 2. Luminous Intensity: +/-15%
- 3. Forward Voltage: +/-0.1V

Note: Accuracy may depend on the sorting parameters.

SPEC NO: DSAA5505 REV NO: V.6 DATE: MAR/21/2005 PAGE: 3 OF 3
APPROVED: J. Lu CHECKED: Allen Liu DRAWN: B.H.LI