



## 桥式整流器 Bridge Rectifier


## ■ 特征 Features

- $I_o$  0.8A
- $V_{RRM}$  100V~1000V
- 玻璃钝化芯片  
Glass passivated chip
- 耐正向浪涌电流能力高  
High surge forward current capability

## ■ 用途 Applications

- 作一般电源单相桥式整流用  
General purpose 1 phase Bridge rectifier applications

## ■ 外形尺寸和印记 Outline Dimensions and Mark

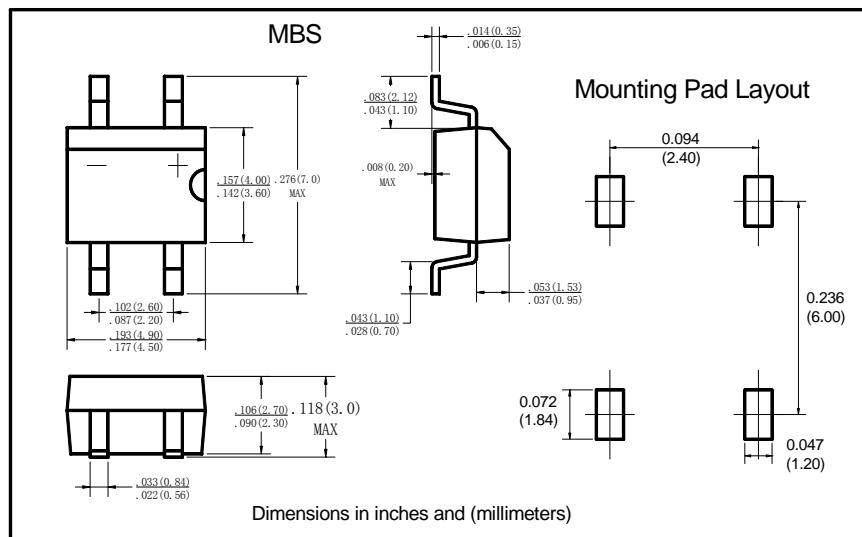

## ■ 极限值 (绝对最大额定值) Limiting Values (Absolute Maximum Rating)

参数名称 Item	符号 Symbol	单位 Unit	条件 Conditions	MB					
				1S	2S	4S	6S	8S	10S
反向重复峰值电压 Repetitive Peak Reverse Voltage	$V_{RRM}$	V							100 200 400 600 800 1000
平均整流输出电流 Average Rectified Output Current	$I_o$	A	60Hz正弦波, 电阻负载, $T_a=40^\circ C$	安装在氧化铝基板上 On alumina substrate					
			60Hz sine wave, R-load, $T_a=40^\circ C$	安装在玻璃-环氧基板上 On glass-epoxy substrate					
正向(不重复)浪涌电流 Surge(Non-repetitive)Forward Current	$I_{FSM}$	A	60Hz正弦波, 一个周期, $T_j=25^\circ C$ 60Hz sine wave, 1 cycle, $T_j=25^\circ C$						30
正向浪涌电流的平方对电流 浪涌持续时间的积分值 Current Squared Time	$I^2t$	$A^2S$	1ms $\leq t < 8.3ms$ $T_j=25^\circ C$ , 单个二极管 1ms $\leq t < 8.3ms$ $T_j=25^\circ C$ , Rating of per diode						3.7
存储温度 Storage Temperature	$T_{stg}$	°C							-55 ~ +150
结温 Junction Temperature	$T_j$	°C							-55 ~ +150

■ 电特性 ( $T_a=25^\circ C$  除非另有规定)Electrical Characteristics ( $T_a=25^\circ C$  Unless otherwise specified)

参数名称 Item	符号 Symbol	单位 Unit	测试条件 Test Condition	最大值 Max
正向峰值电压 Peak Forward Voltage	$V_{FM}$	V	$I_{FM}=0.4A$ , 脉冲测试, 单个二极管的额定值 $I_{FM}=0.4A$ , Pulse measurement, Rating of per diode	1.05
反向峰值电流 Peak Reverse Current	$I_{RRM}$	$\mu A$	$V_{RM}=V_{RRM}$ , 脉冲测试, 单个二极管的额定值 $V_{RM}=V_{RRM}$ , Pulse measurement, Rating of per diode	10
热阻 Thermal Resistance	$R_{\theta J-A}$	°C/W	结和环境之间, 安装在氧化铝基板上 Between junction and ambient, On alumina substrate	76
			结和环境之间, 安装在玻璃-环氧基板上 Between junction and ambient, On glass-epoxy substrate	134
			结和引线之间 Between junction and lead	20



## ■特性曲线（典型） Characteristics(Typical)

