

Overview

Inductive sensor is a kind of proximity sensor.

Concept of Proximity Sensor

Proximity sensor is used to detect the proximity of objects and control the switch under the condition of non-contact by using the sensitive characteristics of sensors to close objects. In the common proximity sensor, according to the principle of induction, the proximity sensor can be divided into three types: high frequency oscillation, magnetic induction and electrostatic capacitance.

Features of Proximity Sensor

- ◆ No mechanical contact, low power Consumed and long life.
- ◆ Suitable for harsh working environment, reliable work.
- ◆ High repeatability of the detection, can accurately judge the location of the object.
- ◆ High response frequency, suitable for fast moving object detection.

Basic Principle of Inductive Sensor

High frequency alternating magnetic field is generated in the front-end detection coil. When the metal object is close to the magnetic field, eddy current is generated inside the metal object due to electromagnetic induction, leading to the attenuation of magnetic field energy, which is called eddy current loss. When the sensing surface of the proximity sensor is constantly close to the metal object, the attenuation of the magnetic field energy of the metal object is constantly increasing. When the attenuation reaches a certain degree, the sensor triggers the switch to output signals, so as to detect the presence or absence of the object.

Movement Differential

The difference between the induction distance when the proximity switch operates and the distance generated when the proximity switch is reset is the response distance. The response distance of the proximity switch is the response distance measured when the standard detection object is used.

Consumed Current

The current required in the working state of the sensor.

Leak Current


When the sensor is not turned on, the residual current in its load is called leak current.

Response Frequency

Response frequency is the maximum number of actions per second of the sensor.

Model Naming

Product Name:

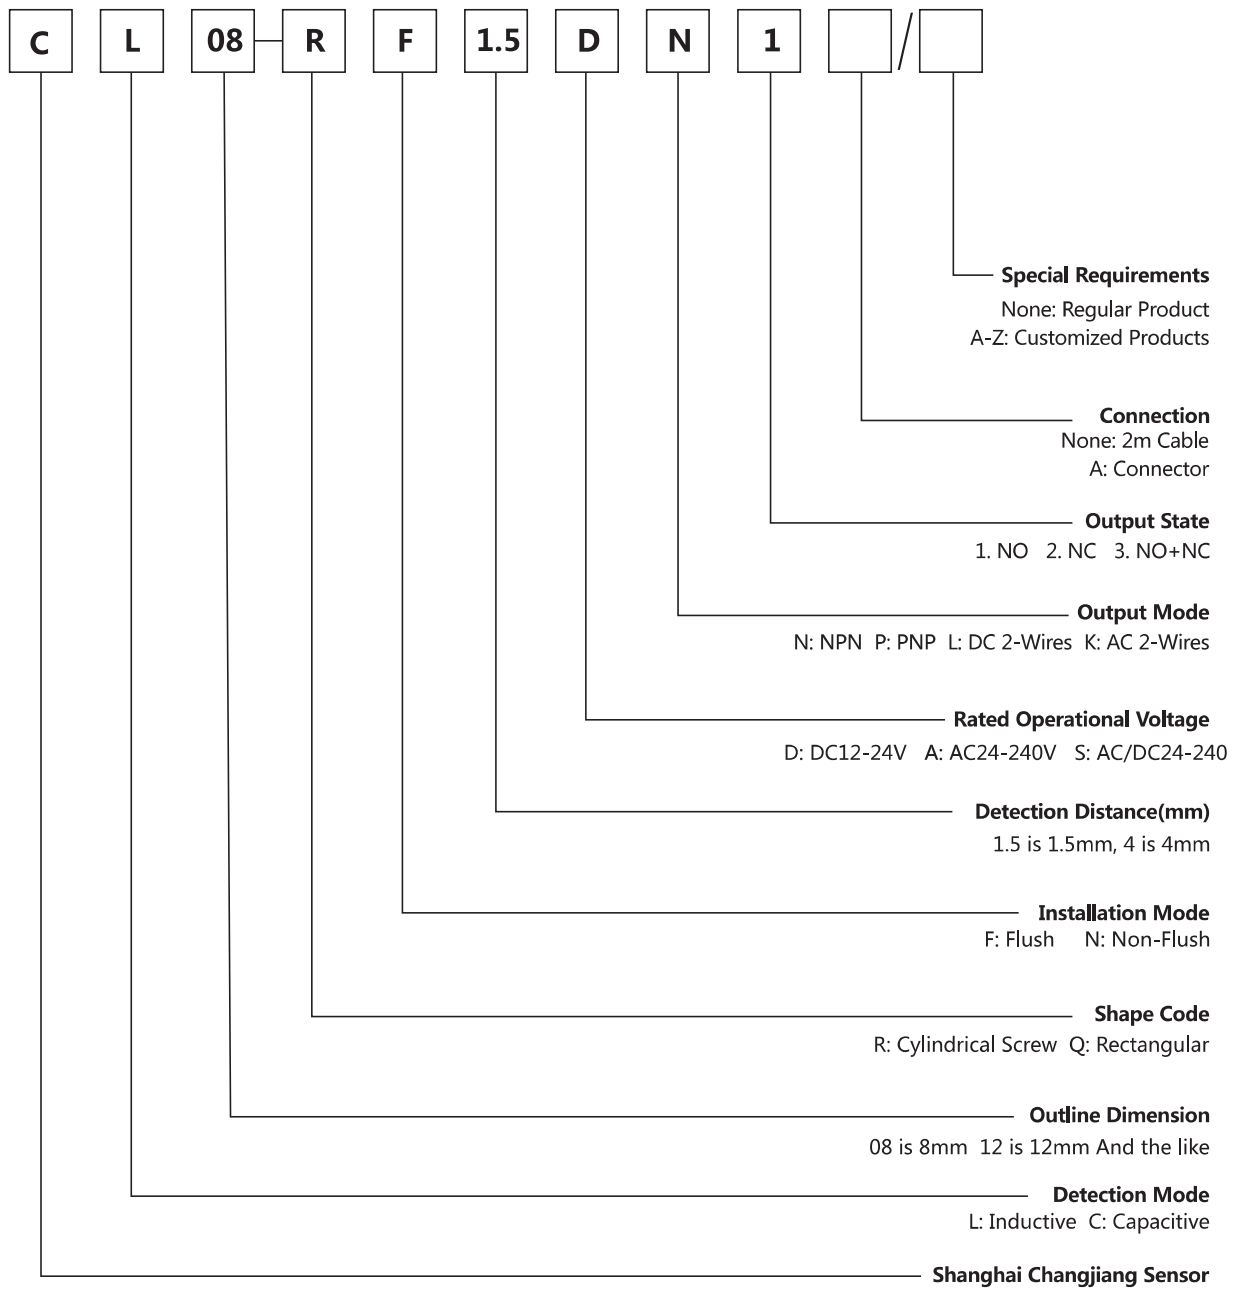


Inductive Sensor

Standard Function Type

- ♦ The non-contact detection method is safe and reliable.
- ♦ The special IC is used to design and manufacture to improve the anti-interference performance.
- ♦ Durable and high reliable, can replace small switches and limit switches.

Full Specification:

The cylindrical series M08 to M30mm and the rectangular series 17*17 to 40*40 mm.

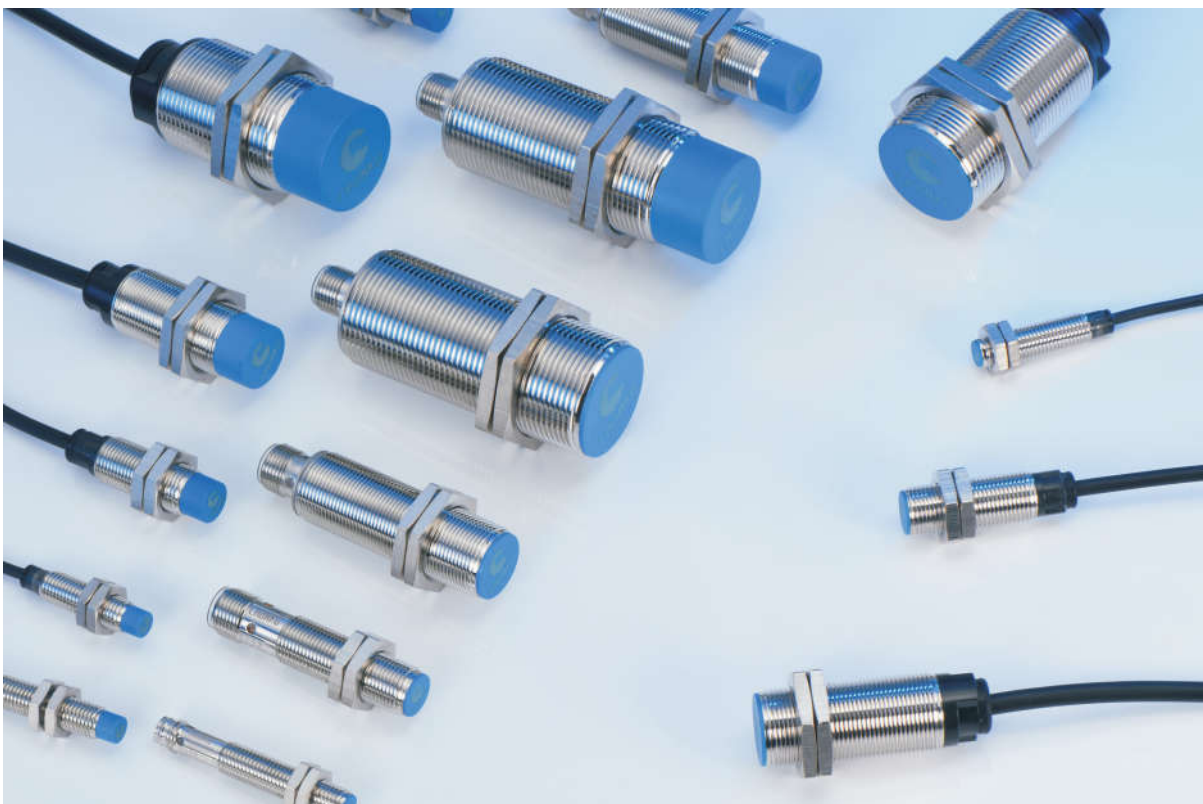

Inductive Sensor - Cylindrical

- ♦ High repeat accuracy
- ♦ Low temperature drift
- ♦ Strong anti-interference ability
- ♦ Bilateral indicator light structure
- ♦ IP67 grade
- ♦ 2m standard cable
- ♦ Strong and durable structure, stable and reliable performance, good consistency, high cost performance




AC 2-Wires

Product No.		CL18	CL18	CL18	CL18
Installation Mode		Flush	Non-flush	Flush	Non-flush
Detection Distance		5mm±10%	8mm±10%	5mm±10%	8mm±10%
Setting Distance		0 ~ 4mm	0 ~ 6.4mm	0 ~ 4mm	0 ~ 6.4mm
Size (mm)		M18*1*53	M18*1*53	M18*1*67	M18*1*70
Output Mode	AC 2 Wires NO	CL18-RF5AK1	CL18-RN8AK1	CL18-RF5AK1-A	CL18-RN8AK1-A
Output Mode	AC 2 Wires NC	CL18-RF5AK2	CL18-RN8AK2	CL18-RF5AK2-A	CL18-RN8AK2-A
Technical Parameter					
Standard Detection Object		Iron 18×18×1mm	Iron 30×30×1mm	Iron 18×18×1mm	Iron 30×30×1mm
Response Frequency		25Hz	25Hz	25Hz	25Hz
Movement Differential		Less than 10% of detection distance			
Supply Voltage		AC24-240V 50/60Hz (AC20-264V)			
Service Voltage Range					
Consumed Current		Less than 1.7mA			
Switching Capacity		5-200mA			
Indicator		Action display (red)			
Protection Circuit		Surge absorption			
Ambient Temperature Range		Working: -25~+70℃ Storing: -40 ~ +85 ℃ (no freeze, no dew)			
Ambient Humidity Range		Working / Storing: 35~95%RH (no dew)			
Temperature Effect		Temperature range from -25 ℃ to 70 ℃ is 23 ℃, the detection distance is less than ±10%.			
Influence of Voltage		In the range of 15% of the rated power supply voltage, the rated power supply voltage is within 1% of the detection distance			
Insulation Resistance		Above 50MΩ (DC500V megger) between the whole charging part and the shell			
Withstand Voltage		AC1, 000V 50/60Hz 1min between the whole charging part and the shell			
Vibration (Durability)		10~55Hz up and down amplitude is 1.5mm, 2 hours in X、Y、Z directions			
Impact (Durability)		300m/s ² 10 times in X、Y、Z directions			
IP Grade		IEC Standard IP67			
Connection Mode		2 m of PVC cable	2 m of PVC cable	M12 4-pins connector	M12 4-pins connector
Weight		About 93g	About 93g	About 42g	About 41g
Material		Case: brass nickel plated, Test surface: heat-resistant ABS, standard cable			


Outline Size and Output Circuit Diagram

Cylindrical Wire Outline Dimensions


CL08-RF1.5□□□-□/□

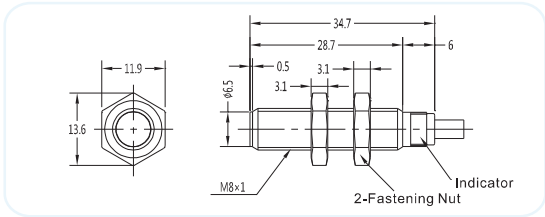


CL08-RN2□□□-□/□

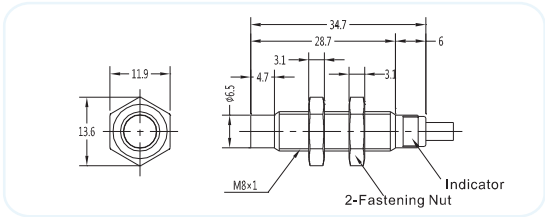


CL12-RF2□□□-□/□

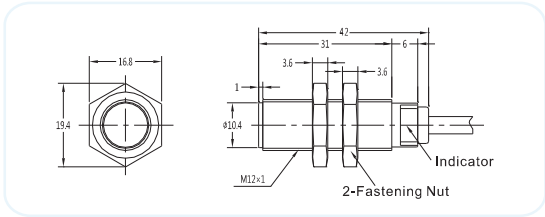


CL12-RN4□□□-□/□

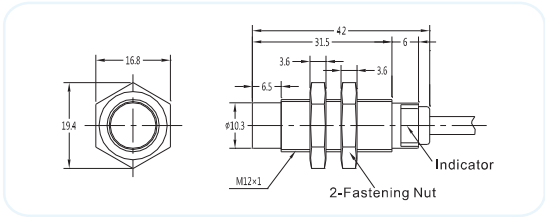


CL18-RF5□□□-□/□

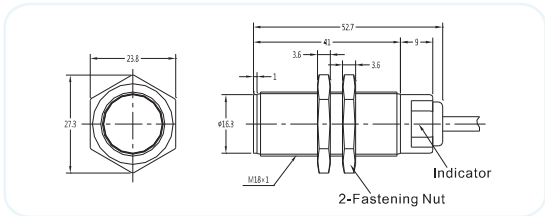


CL18-RN8□□□-□/□

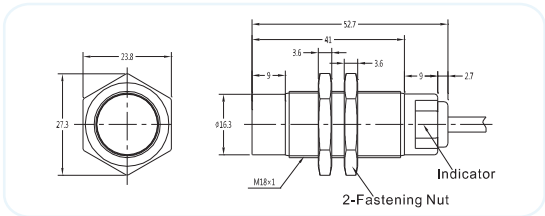

CL30-RF10□□□-□/□

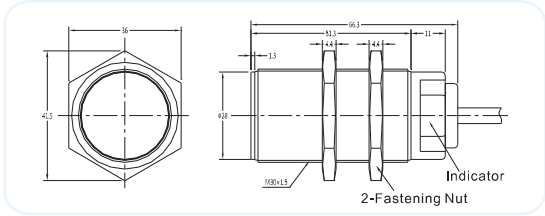


CL30-RN15□□□-□/□

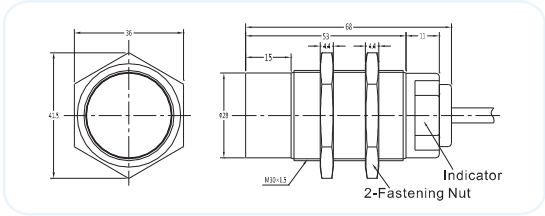


Cylindrical Connector Type Outline Dimensions


CL08-RF1.5□□□-□/□

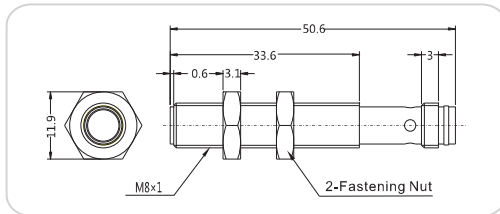


CL08-RN2□□□-□/□

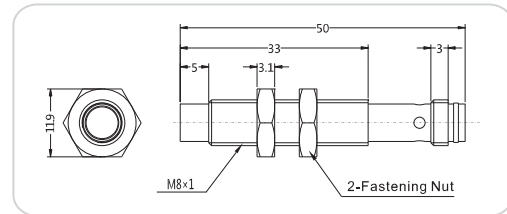


CL12-RF2□□□-□/□

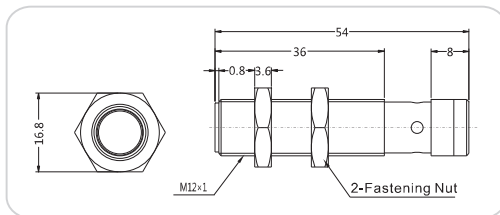


CL12-RN4□□□-□/□

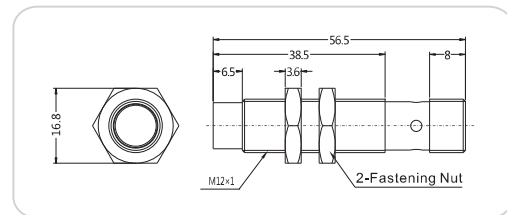


CL18-RF5□□□-□/□

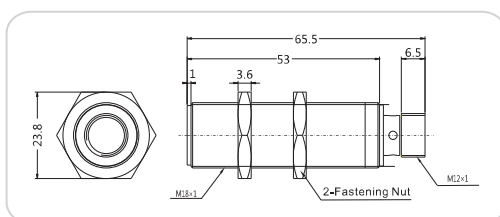


CL18-RN8□□□-□/□

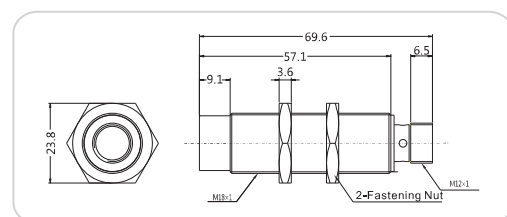

CL30-RF10□□□-□/□

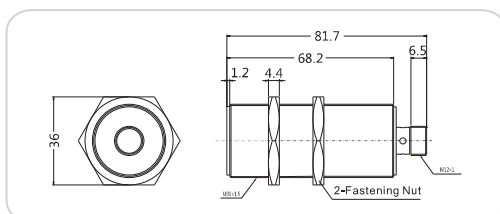


CL30-RN15□□□-□/□

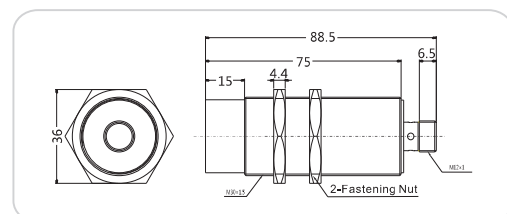


Cable Wiring Diagram

DC 3-Wires


NPN NO

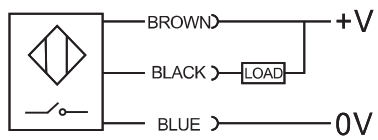


NPN NC

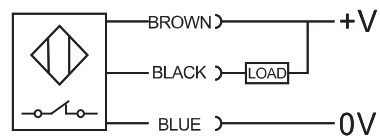

PNP NO

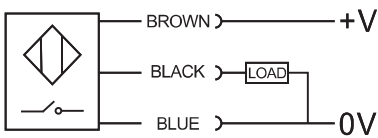


PNP NC

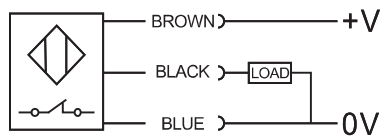


DC 2-Wires

NO

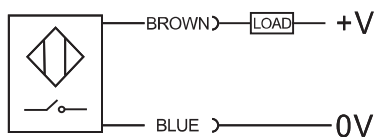


NC

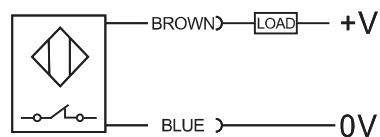


AC 2-Wires

NO

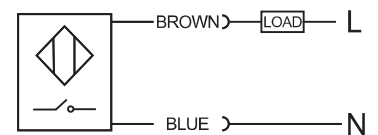

NC

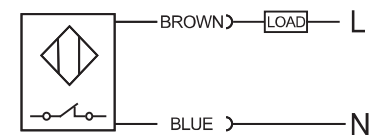


Outline Size and Output Circuit Diagram


Connector Wiring Diagram

DC 3-Wires

NPN NO

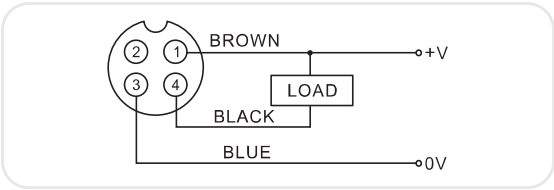


PNP NO

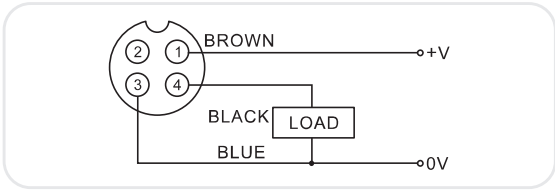


DC 2-Wires

NO

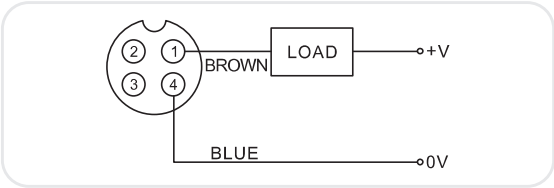


NC

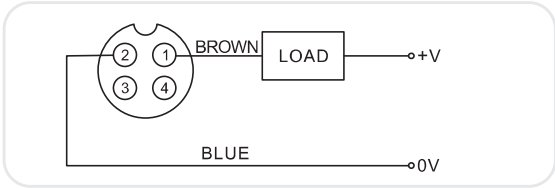


AC 2-Wires

NO

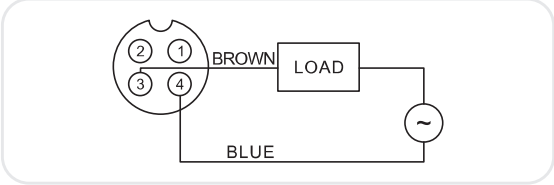


NC

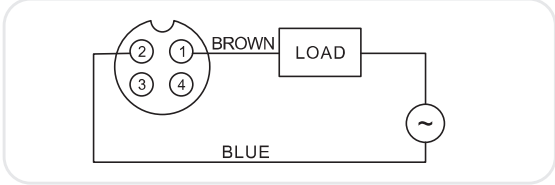


DC 3-Wires 3-Pins Connector

NPN

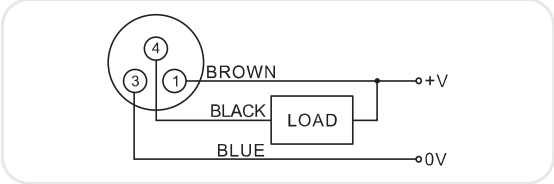


PNP

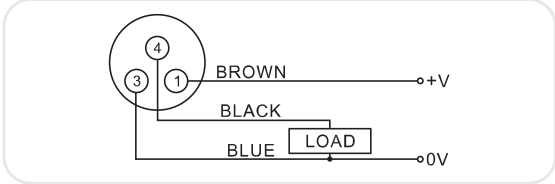

Product Installation Mode


Flush Installation of Inductive Sensor:

When the inductive sensor (proximity switch) detection surface and the metal surface are mounted flush, other surfaces are submerged in the metal surface and are not affected by the metal object. Please refer to

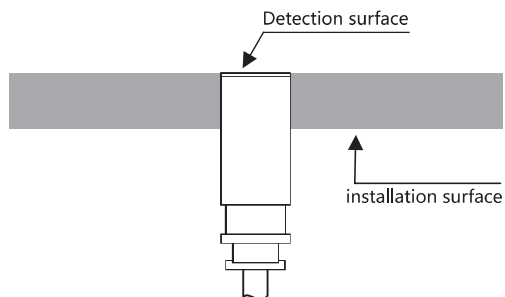

Non-Flush Installation of Inductive Sensor:


The non-embedded inductive sensor (proximity switch) cannot be submerged in the metal surface around the sensor surface, and it is easy to be affected by the metal surface. The detection distance of the non-submerged inductive sensor is longer, and the distance between the sides of the inductive sensor must be 3 times as long as that of the detection head during installation to prevent interference by metal objects.

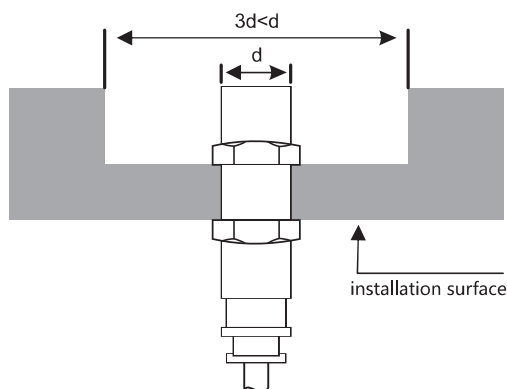


Side-by-Side Installation of Inductive Sensor

When multiple inductive sensors (proximity switches) are required to be installed side by side, in order to prevent interference between proximity switches, please refer to the chart less than to reserve a distance.

Flush :

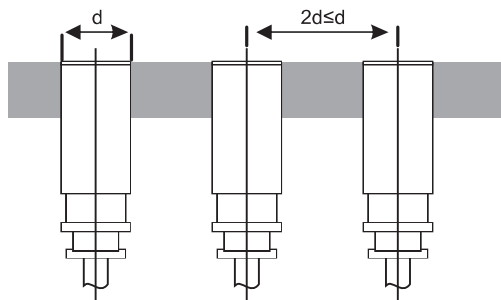


Non-Flush :

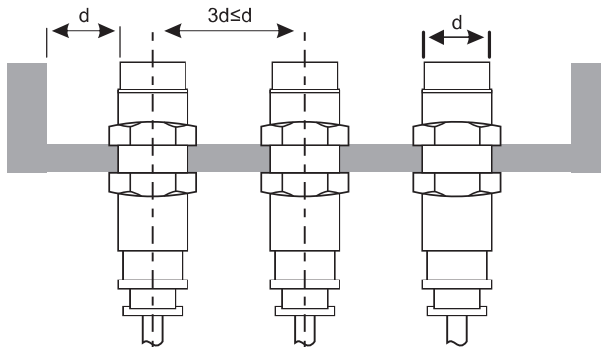


The effect of the material close to the detected object on the measuring distance

When detecting objects of different materials, the detection distance of the proximity switch has a corresponding change.

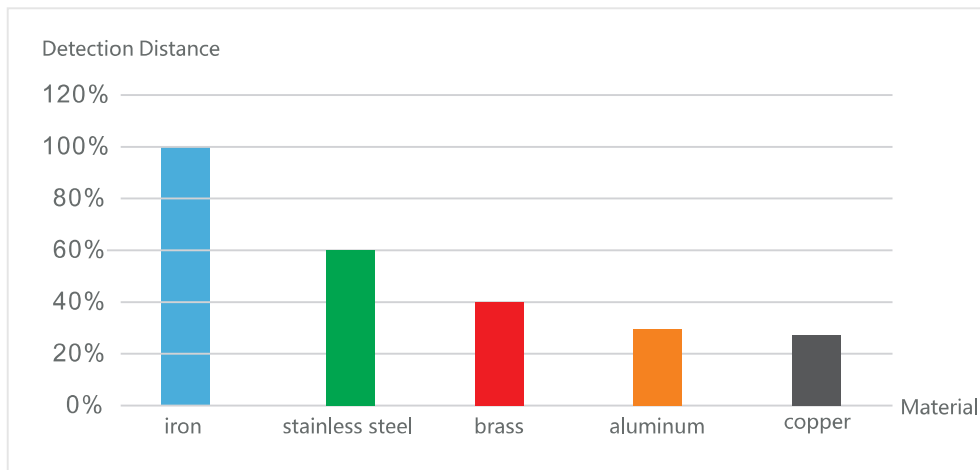

IP Grade Description

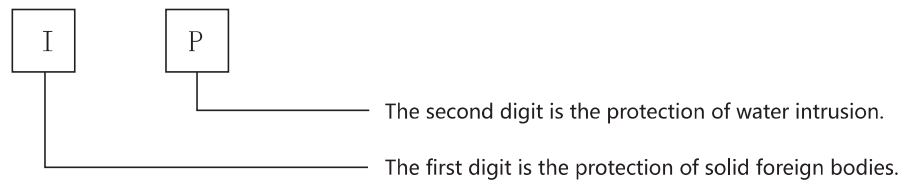

Jargon	Instruction			
IP67 Grade Standard		The first digit represents the level of protection (dust)	The second digit indicates the IP Grade	
	4	Prevent solid invasion of products with diameters greater than 1.0mm	4	Not affected by droplets splashing in any direction
	5	Prevent dust from operating site	5	Not affected by water injection in any direction
	6	Prevent all dust from invading	6	Not intruded by water spraying in any direction
			7	No effect on invasion of water under specified time and pressure
			8	Can still be used in water under specific pressure

Product Application Case

Product Application Case

Our products are widely used in food packaging, transportation equipment, textile machinery, semiconductor, printing machinery, pharmaceutical machinery, logistics industry, medical devices, elevators and so on.


Detection of bottle caps




Manipulator application




Panel count

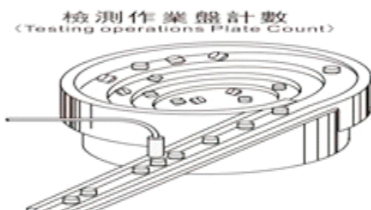


Test the product for changes

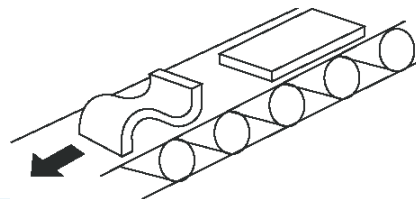


Mold positioning detection



Test screw height

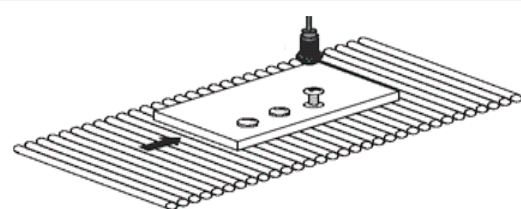

Location detection



Equipment production line application

