


# EVERCOOL


## 9225 series 92x92x25 mm



### P&Q Curve

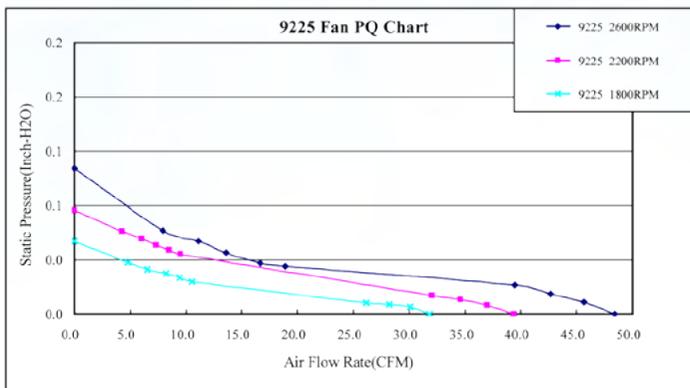

### Dimensions Drawing

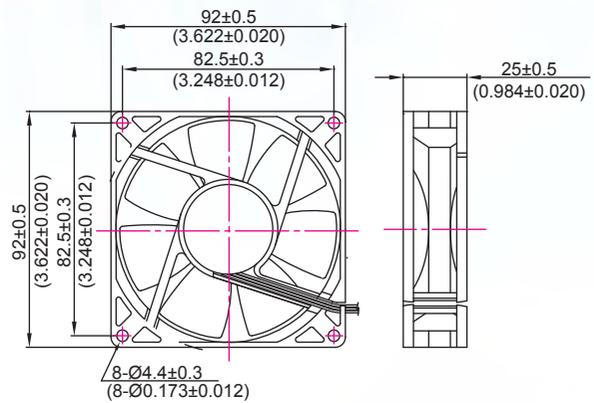

UNIT:MM/(INCH)

### Specifications

Model	Rated Voltage (VDC)	Rated Current (AMP)	Power Consumption (WATTS)	Speed Reference (RPM)	Air Flow (CFM)	Static Pressure (Inch-H <sub>2</sub> O)	Noise (dBA)
EC9225H12X	12	0.21	2.52	2600	48.43	0.11	<31
EC9225M12X	12	0.15	1.8	2200	39.35	0.08	<25
EC9225L12X	12	0.09	1.08	1800	31.84	0.05	<22

9225 series

- ▶ Material:impeller & Frame:Plastic(UL 94V-0)
- ▶ Lead Wires:  
UL 1007 AWG #24 Or Equivalent  
Red Wire Positive(+), Black Wire Negative(-), Yellow Wire Or Blue Wire Signal(FG)
- ▶ Function type is optional.

- ▶ The max air flow and the speed are measured in free air; max air pressure is measured at zero air flow.
- ▶ Noise is measured in anechoic chamber in free air, one meter from intake side.
- ▶ All readings are typical values at rated voltage.
- ▶ Specifications are subject to change without notice.
- ▶ Additional special function may be added according the requirement of customer.