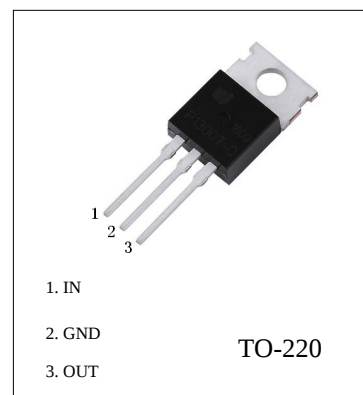


FEATURES

Output Current up to 1.5 A
Thermal Overload Protection
Short Circuit Protection
Output Transistor Safe Operating Area Protection

7805


ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies)

Parameter	Symbol	Value	Unit
Input Voltage	V_i	35	V
Thermal resistance junction-air	$R_{\theta JA}$	65	$^{\circ}\text{C}/\text{W}$
Thermal resistance junction-cases	$R_{\theta JC}$	5	$^{\circ}\text{C}/\text{W}$
Operating Junction Temperature Range	TOPR	0-125	$^{\circ}\text{C}$
Storage Temperature Range	TSTG	-65-150	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS ($V_i=10\text{V}$, $I_o=500\text{mA}$, $C_i=0.33\mu\text{F}$, $C_o=0.1\mu\text{F}$, unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output voltage	V_o	25°C	4.8	5.0	5.2	V
		$7\text{V} \leq V_i \leq 20\text{V}$, $I_o=5\text{mA}-1\text{A}$, $P \leq 15\text{W}$	4.75	5.00	5.25	V
Load Regulation	ΔV_o	$I_o=5\text{mA}-1.5\text{A}$		9	100	mV
		$I_o=250\text{mA}-750\text{mA}$		4	50	mV
Line regulation	ΔV_o	$7\text{V} \leq V_i \leq 25\text{V}$		4	100	mV
		$8\text{V} \leq V_i \leq 12\text{V}$		1.6	50	mV
Quiescent Current	I_q	25°C		5	8	mA
Quiescent Current Change	ΔI_q	$7\text{V} \leq V_i \leq 25\text{V}$		0.3	1.3	mA
		$5\text{mA} \leq I_o \leq 1\text{A}$		0.03	0.5	mA
Output Noise Voltage	V_N	$10\text{Hz} \leq f \leq 100\text{KHz}$		42		μV
Output voltage drift	$\Delta V_o / \Delta T$	$I_o=5\text{mA}$		-1.1		$\text{mV}/^{\circ}\text{C}$
Ripple Rejection	RR	$8\text{V} \leq V_i \leq 18\text{V}$, $f=120\text{Hz}$	62	73		dB
Dropout Voltage	V_d	$I_o=1\text{A}$		2		V
Output resistance	R_o	$f=1\text{KHz}$		10		$\text{m}\Omega$
Short Circuit Current	I_{sc}	25°C		230		mA
Peak Current	I_{pk}	25°C		2.2		A

7805 Typical Performance Characteristics

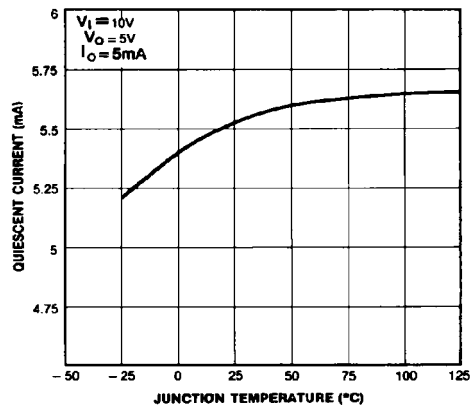


Figure 1. Quiescent Current

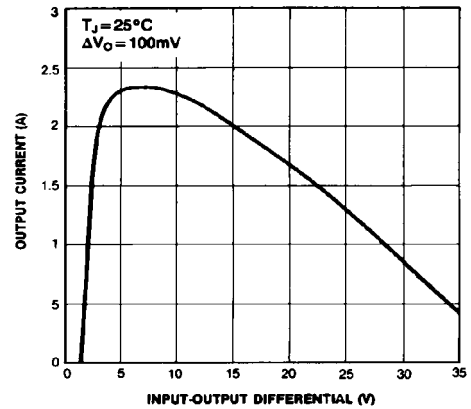


Figure 2. Peak Output Current

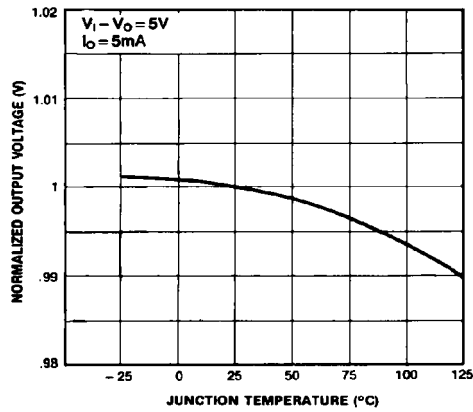


Figure 3. Output Voltage

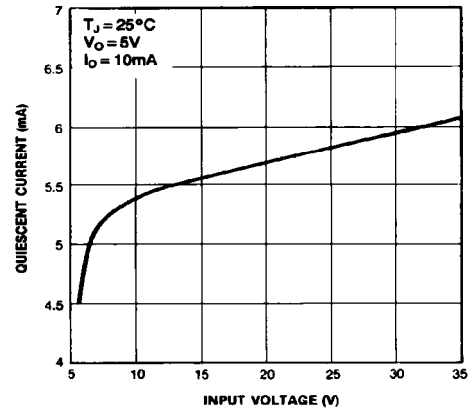


Figure 4. Quiescent Current