


FEATURES

- For AF driver and output stages
- High collector current
- Low collector-emitter saturation voltage
- Complementary types:BCX51...BCX53(PNP)

ORDERING INFORMATION

Type No.	Marking	Package Code
BCX54	BA	SOT-89
BCX54-10	BC	SOT-89
BCX54-16	BD	SOT-89
BCX55	BE	SOT-89
BCX55-10	BG	SOT-89
BCX55-16	BM	SOT-89
BCX56	BH	SOT-89
BCX56-10	BK	SOT-89
BCX56-16	BL	SOT-89

BCX54/BCX55/BCX56 (NPN)

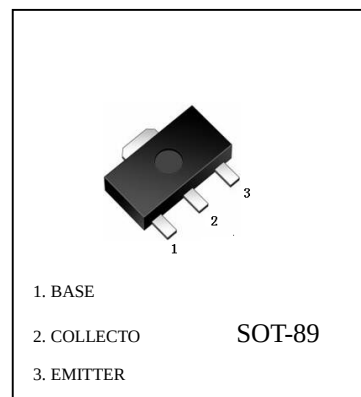

MAXIMUM RATING @ Ta=25°C unless otherwise specified

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	BCX54 45	V
		BCX55 60	
		BCX56 100	
V_{CEO}	Collector-Emitter Voltage	BCX54 45	V
		BCX55 60	
		BCX56 80	
V_{EBO}	Emitter-Base Voltage	5	V
I_C	DC Collector Current	1	A
I_{CM}	Peak Collector Current	1.5	A
I_B	Base current	100	mA
I_{BM}	Peak base current	200	mA
P_{tot}	Total power dissipation, $T_S=130^{\circ}C$	1	W
T_j, T_{stg}	Junction and Storage Temperature	-65 to +150	$^{\circ}C$


BCX54/BCX55/BCX56 TRANSISTOR (NPN)

ELECTRICAL CHARACTERISTICS @ $T_a=25^{\circ}\text{C}$ unless otherwise specified

Parameter	Symbol	Test conditions	MIN	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C=100\mu\text{A}$ $I_B=0$ BCX54 BCX55 BCX56	45 60 100		V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C=10\text{mA}$ $I_B=0$ BCX54 BCX55 BCX56	45 60 80		V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=10\mu\text{A}$ $I_C=0$	5		V
Collector cut-off current	I_{CBO}	$V_{CB}=30\text{V}$ $I_E=0$		100	nA
		$V_{CB}=30\text{V}$ $I_E=0$, $T_A=150^{\circ}\text{C}$		20	μA
DC current gain	h_{FE}	$V_{CE}=2\text{V}$ $I_C=5\text{mA}$	25	250	
		$V_{CE}=2\text{V}$ $I_C=150\text{mA}$	40		
		$V_{CE}=2\text{V}$ $I_C=500\text{mA}$	25		
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=500\text{mA}$ $I_B=50\text{mA}$		0.5	V
Base-emitter voltage	V_{BE}	$I_C=500\text{mA}$, $V_{CE}=2\text{V}$		1	V
Transition frequency	f_T	$V_{CE}=10\text{V}$, $I_C=50\text{mA}$, $f=20\text{MHz}$	100		MHz

Typical Characteristics


Total power dissipation $P_{tot} = f(T_S)$

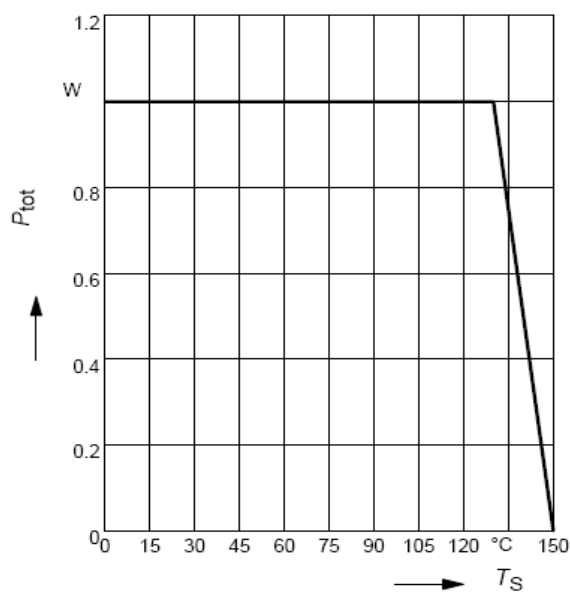

BCX54/BCX55/BCX56

Transition frequency $f_T = f(I_C)$

$V_{CE} = 10\text{V}$

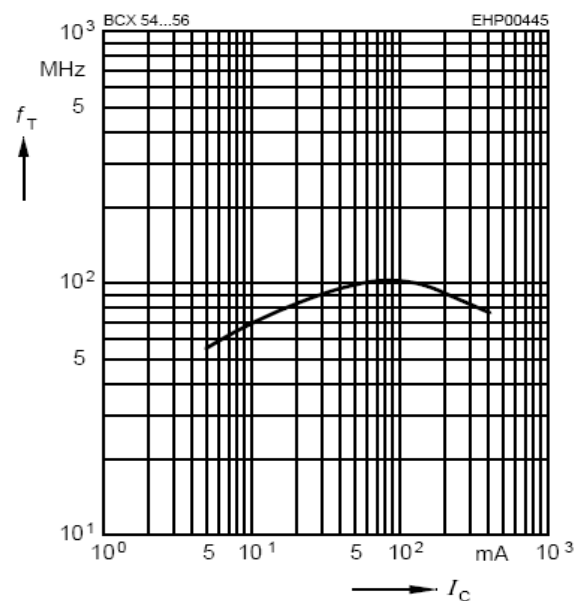


Typical Characteristics

BCX54/BCX55/BCX56


Permissible pulse load

$$P_{\text{totmax}} / P_{\text{totDC}} = f(t_p)$$

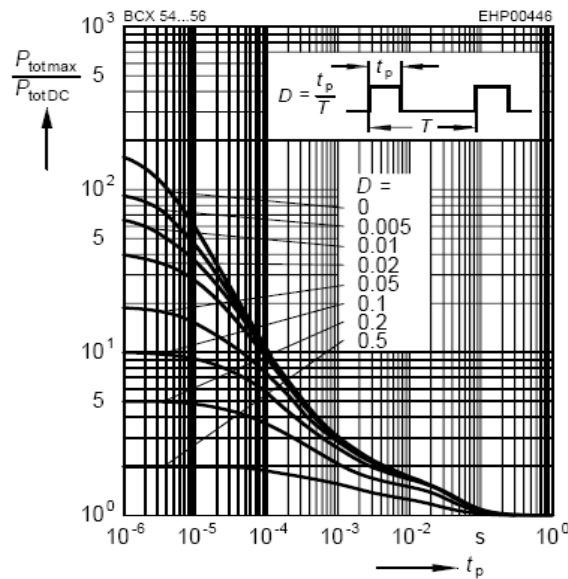


Collector cutoff current $I_{\text{CBO}} = f(T_A)$

$$V_{\text{CB}} = 30\text{V}$$

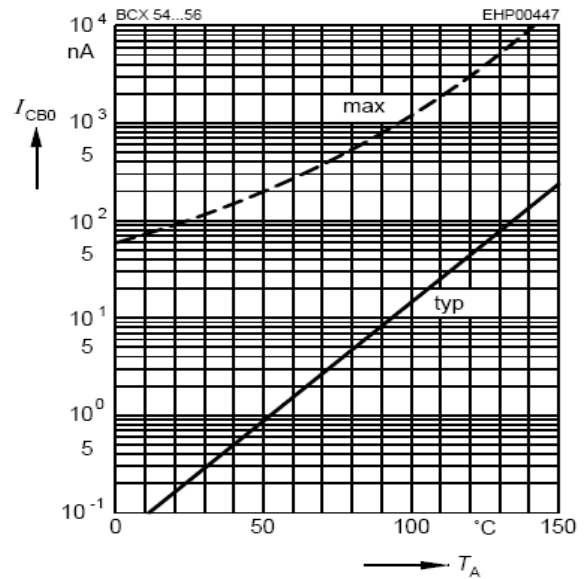


Collector current $I_C = f(V_{\text{BE}})$

$$V_{\text{CE}} = 2\text{V}$$

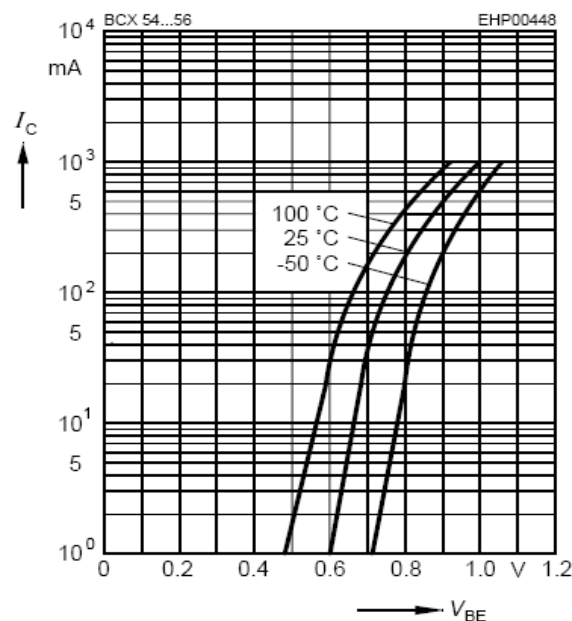

Collector-emitter saturation voltage

$$I_C = f(V_{\text{CEsat}}), h_{\text{FE}} = 10$$

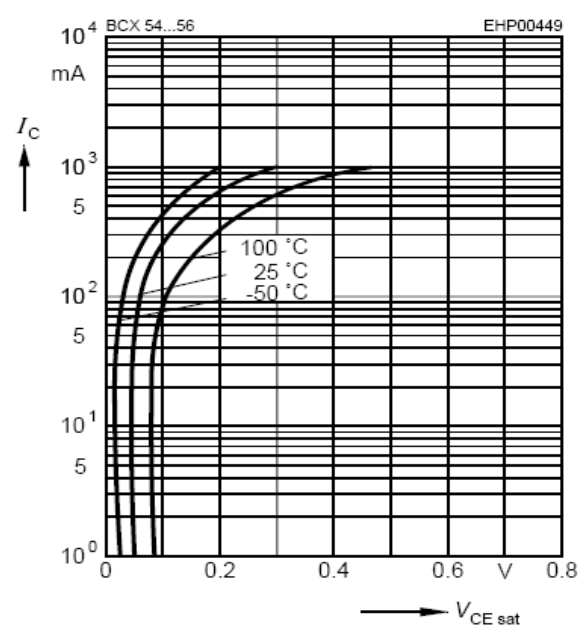


Typical Characteristics

BCX54/BCX55/BCX56

Base-emitter saturation voltage

$$I_C = f(V_{BEsat}), h_{FE} = 10$$

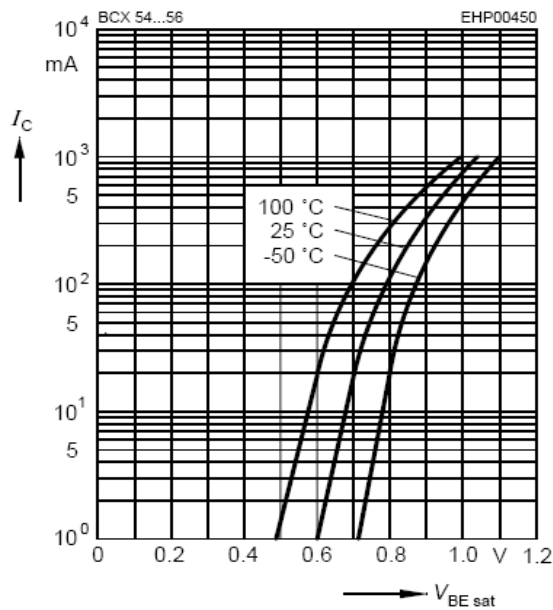

DC current gain $h_{FE} = f(I_C)$

$$V_{CE} = 2V$$

