


FEATURES

- For surface mounted applications
- Ultra fast switching for high efficiency
- Low reverse leakage
- Glass passivated chip junction
- Built-in strain relief, ideal for automated placement
- High forward surge current capability
- Plastic material used carries Underwriters

Laboratory Classification 94V-0



SMAF



Cathode

MECHANICAL DATA

- Case: SMAF Molded plastic
- Terminals: Pure tin plated, lead free
- Polarity: Indicated by cathode band
- Weight: 27mg (approx.)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Parameter	Symbol	US3AF	US3BF	US3DF	US3GF	US3JF	US3KF	US3MF	Unit
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current at T _A =75 °C	I _{F(AV)}	3.0							A
Peak Forward Surge Current 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC)	I _{FSM}	80.0							A
Maximum Instantaneous Forward Voltage at 3 A	V _F	1.0			1.3	1.68			V
Maximum DC Reverse Current at Rated DC Blocking Voltage	T _A = 25 °C T _A =100 °C	I _R	5.0 100.0						μA
Maximum reverse recovery time (NOTE1)	t _{rr}	50				75			nS
Typical Junction Capacitance (NOTE2)	C _J	15							pF
Maximum Thermal Resistance (NOTE3)	R _{θjl} R _{ajc}	50.0 16.0							°C/W
Operating and Storage Temperature Range	T _{J, TS}	- 50 ~+ 150							°C

Note: 1.Reverse recovery condition $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{rr}=0.25\text{A}$


2.Measured at 1MHz and applied reverse voltage of 4.0V D.C.

3.P.C.B. mounted with 0.2x0.2"(5.0x5.0mm) copper pad areas

Typical Characteristics

AVERAGE FORWARD RECTIFIED CURRENT,
AMPERES

FIG. 1- FORWARD CURRENT DERATING CURVE

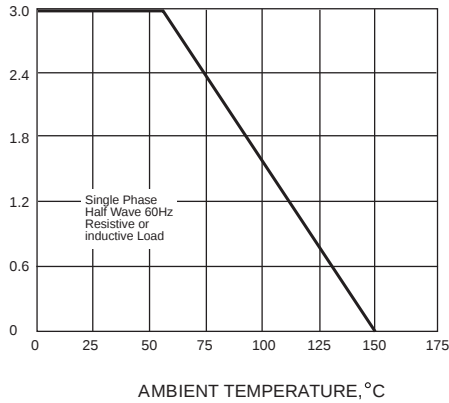

PEAK FORWARD SURGE CURRENT,
AMPERES

FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT


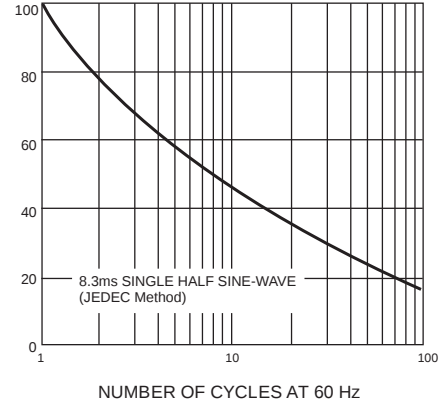


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

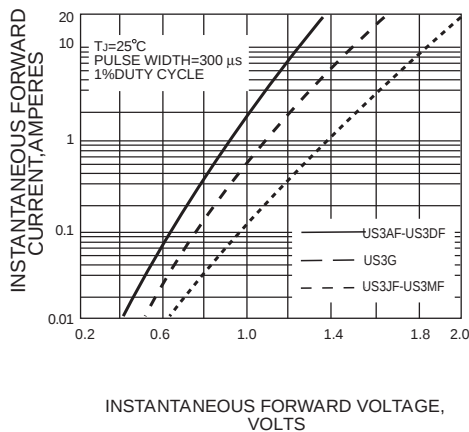

INSTANTANEOUS REVERSE CURRENT,
MICROAMPERES

FIG. 4-TYPICAL REVERSE CHARACTERISTICS



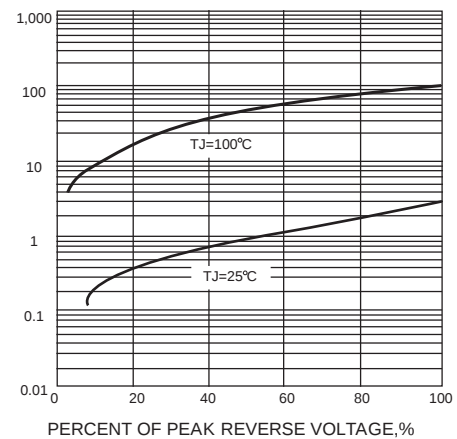



FIG. 5-TYPICAL JUNCTION CAPACITANCE

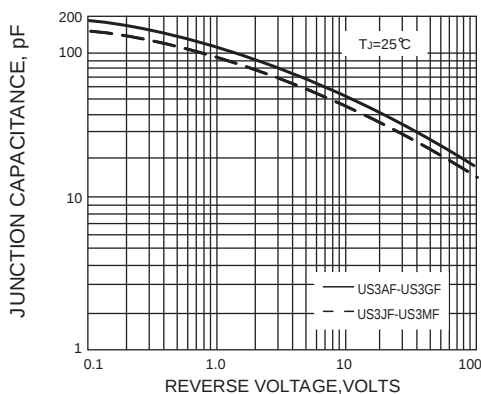

TRANSIENT THERMAL IMPEDANCE,
°C/W

FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

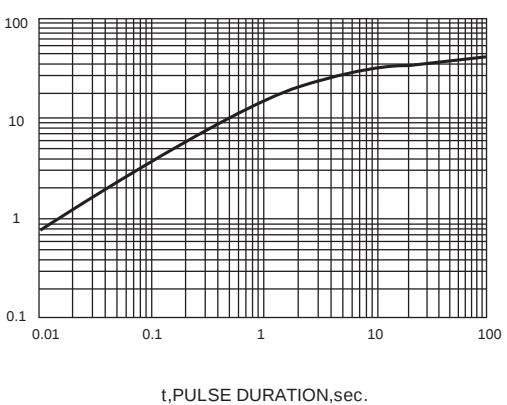

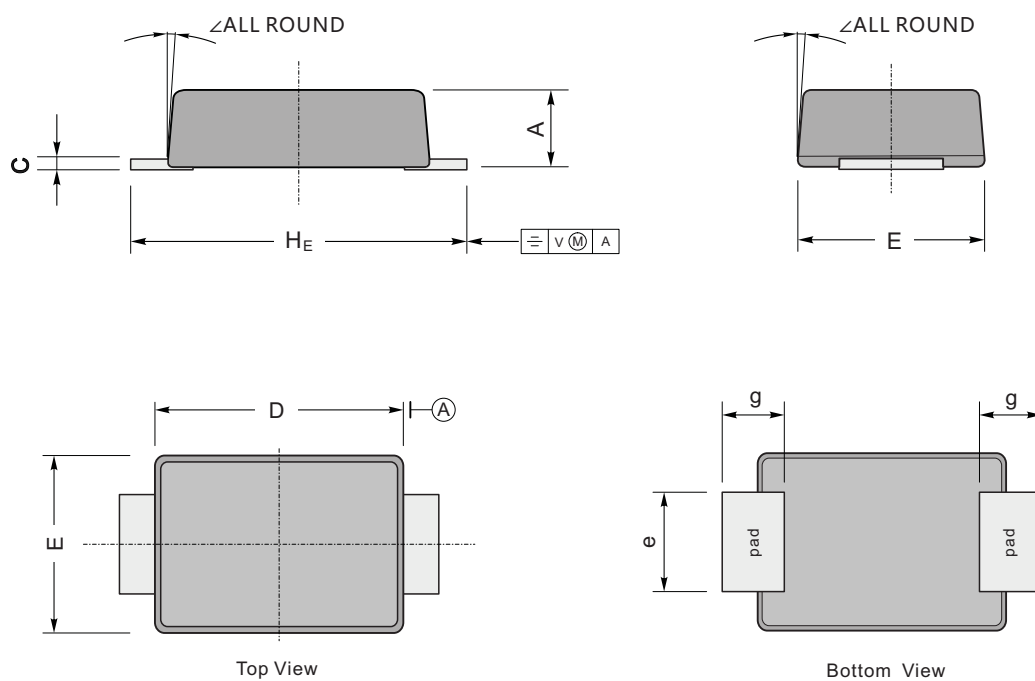SMAF Package Outline Dimensions


UNIT		A	C	D	E	e	g	H_E	$\angle$
mm	max	1.1	0.20	3.7	2.7	1.6	1.2	4.9	7°
	min	0.9	0.12	3.3	2.4	1.3	0.8	4.4	
mil	max	43	7.9	146	106	63	47	193	
	min	35	4.7	130	94	51	31	173	