

International I²R Rectifier

50SQ... SERIES

SCHOTTKY RECTIFIER

5 Amp


Major Ratings and Characteristics

Characteristics	50SQ...	Units
I _{F(AV)} Rectangular waveform	5	A
V _{RRM} range	60 / 100	V
I _{FSM} @ tp=5 μs sine	1900	A
V _F @ 5 Apk, T _J = 125°C	0.52	V
T _J range	-55 to 175	°C

Description/ Features

The 50SQ... axial leaded Schottky rectifier series has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to 175°C junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- 175°C T_J operation
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- Lead-Free plating

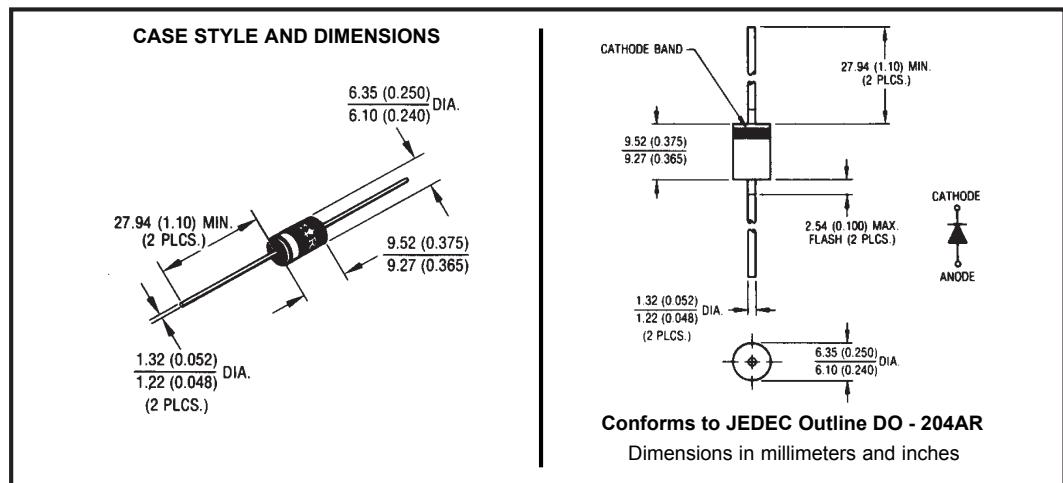

Voltage Ratings

Part number	50SQ060	50SQ080	50SQ100
V_R Max. DC Reverse Voltage (V)	60	80	100
V_{RWM} Max. Working Peak Reverse Voltage (V)			

Absolute Maximum Ratings

Parameters	50SQ	Units	Conditions		
$I_{F(AV)}$ Max. Average Forward Current * See Fig. 5	5	A	50% duty cycle @ $T_J = 119^\circ C$, rectangular wave form		
I_{FSM} Max. Peak One Cycle Non-Repetitive Surge Current * See Fig. 7	1900	A	5μs Sine or 3μs Rect. pulse	Following any rated load condition and with rated V_{RRM} applied	
	290		10ms Sine or 6ms Rect. pulse		
E_{AS} Non-Repetitive Avalanche Energy	7.5	mJ	$T_J = 25^\circ C$, $I_{AS} = 1.0$ Amps, $L = 15$ mH		
I_{AR} Repetitive Avalanche Current	1.0	A	Current decaying linearly to zero in 1 μsec Frequency limited by T_J max. $V_A = 1.5 \times V_R$ typical		

Electrical Specifications

Parameters	50SQ	Units	Conditions		
V_{FM} Max. Forward Voltage Drop (1) * See Fig. 1	0.66	V	@ 5A	$T_J = 25^\circ C$	
	0.77	V	@ 10A		
	0.52	V	@ 5A	$T_J = 125^\circ C$	
	0.62	V	@ 10A		
I_{RM} Max. Reverse Leakage Current (1) * See Fig. 2	0.55	mA	$T_J = 25^\circ C$	$V_R = \text{rated } V_R$	
	7	mA	$T_J = 125^\circ C$		
C_T Max. Junction Capacitance	500	pF	$V_R = 5V_{DC}$, (test signal range 100Khz to 1Mhz) $25^\circ C$		
L_S Typical Series Inductance	10	nH	Measured lead to lead 5mm from body		
dv/dt Max. Voltage Rate of Change (Rated V_R)	10000	V/ μs			

(1) Pulse Width < 300μs, Duty Cycle < 2%

Thermal-Mechanical Specifications

Parameters	50SQ	Units	Conditions	
T_J Max. Junction Temperature Range	-55 to 175	°C		
T_{stg} Max. Storage Temperature Range	-55 to 175	°C		
R_{thJL} Max. Thermal Resistance Junction to Lead	8.0	°C/W	DC operation * See Fig. 4 1/8 inch lead length	
R_{thJA} Typical Thermal Resistance, Junction to Air	44	°C/W		
wt Approximate Weight	1.4(0.049)	g(oz.)		
Case Style	DO-204AR		JEDEC	

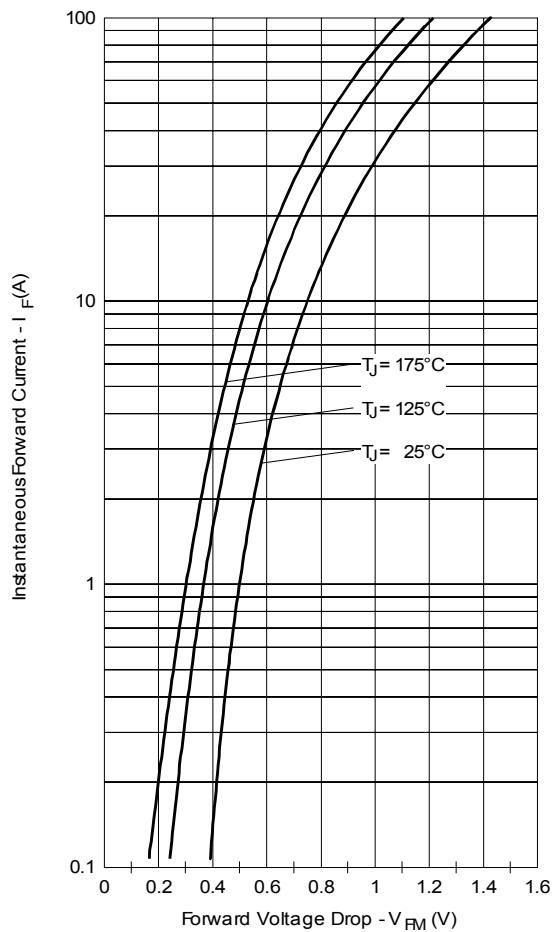


Fig. 1 - Maximum Forward Voltage Drop Characteristics

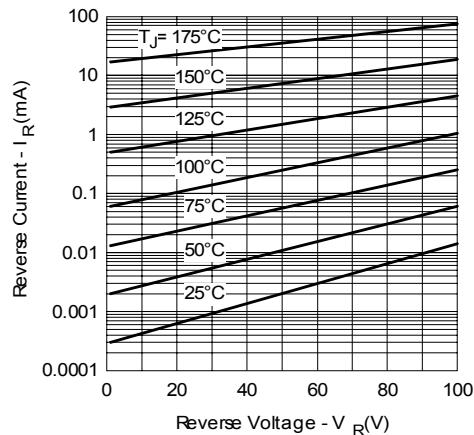


Fig. 2 - Typical Values of Reverse Current Vs. Reverse Voltage

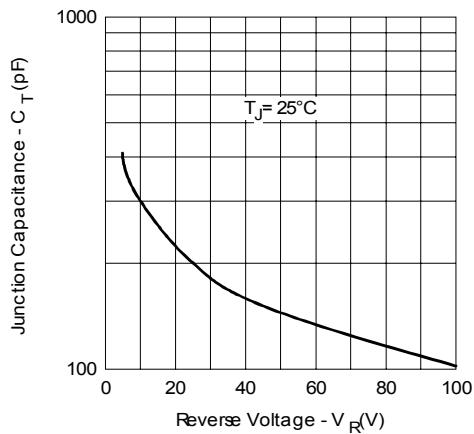


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

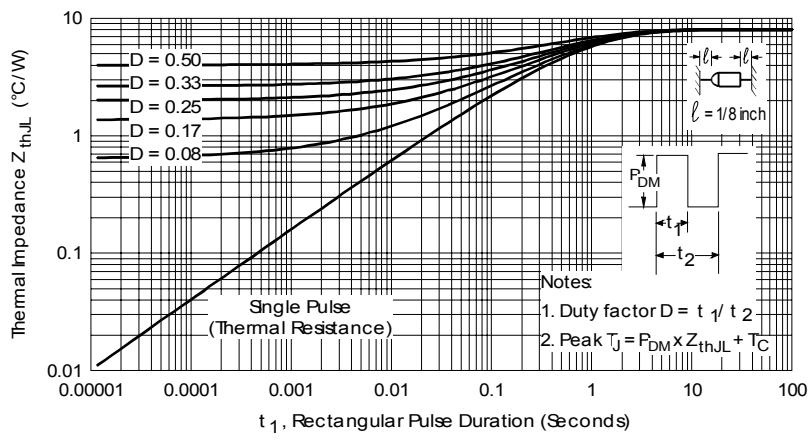


Fig. 4 - Maximum Thermal Impedance Z_{thJL} Characteristics

50SQ... Series

Bulletin PD-2.060 rev. G 06/05

International
IR Rectifier

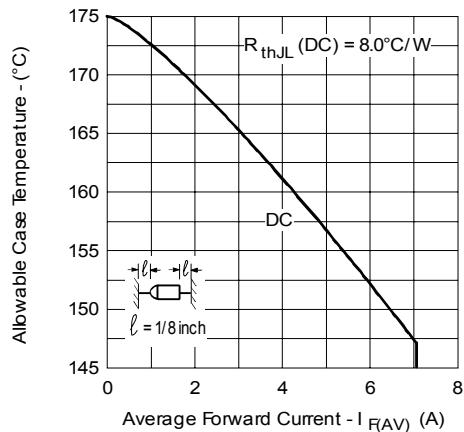


Fig. 5 - Maximum Allowable Case Temperature Vs. Average Forward Current

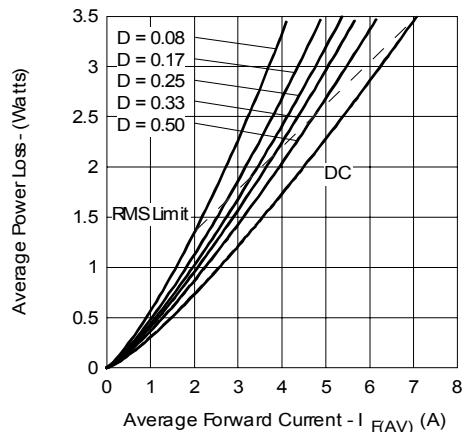


Fig. 6 - Forward Power Loss Characteristics

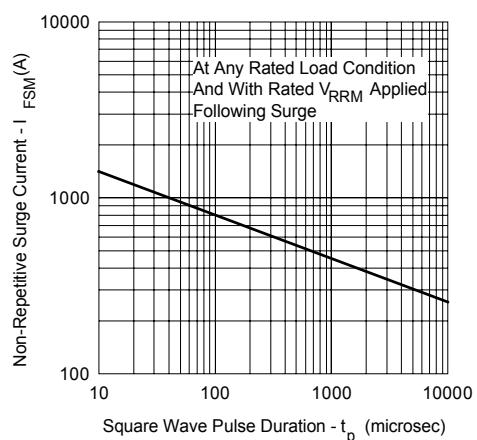


Fig. 7 - Maximum Non-Repetitive Surge Current

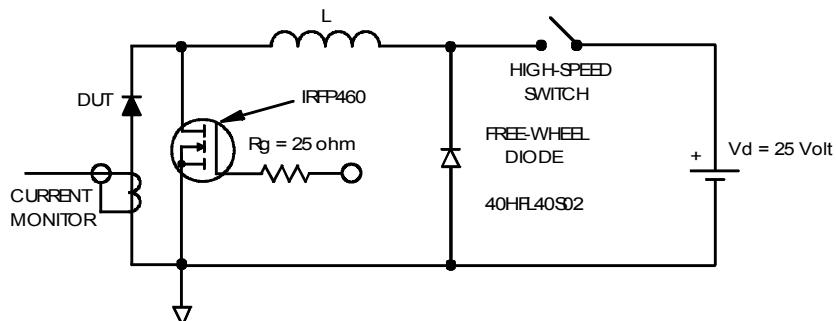


Fig. 8 - Unclamped Inductive Test Circuit

Ordering Information Table

Device Code

The diagram illustrates the device code structure:

50-S-Q-100-TR

Below the segments are five numbered circles:

- 1: 50 = current x 10
- 2: S = DO-204AR
- 3: Q = Schottky Q Series
- 4: Voltage Rating
 - 060 = 60V
 - 080 = 80V
 - 100 = 100V
- 5: TR = Tape & Reel package (1500 pcs)
 - = Box package (200 pcs)

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial Level and Lead-Free.
Qualification Standards can be found on IR's Web site.

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7309
Visit us at www.irf.com for sales contact information. 06/05