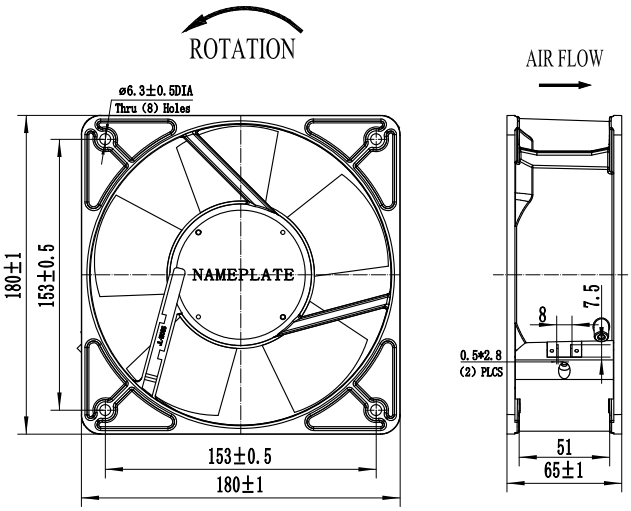

尺寸 Size: 180mm × 180mm × 65mm
风量 Airflow: 355–385CFM
重量 Weight: 1190g
噪音 Noise: 60–62dB(A)
风叶 Impeller Material: PBT UL94–V0 Reinforced Plasticl
外框 Frame: Aluminum Alloy
端子 Terminals: 0.5mm
引线 Lead Wire: AWG#24 UL 1332(Optional)
马达 Motor: Capacitor–Run Induction Motor
温度范围 Operating Temperature: –10℃~+65℃

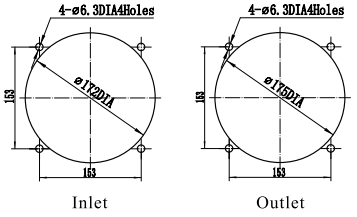

产品型号 Model	轴承型式 Bearing System	电 压 Voltage VAC	频 率 Freq. Hz	电 流 Current A	功 率 Power W	转 速 Speed RPM	噪 音 Noise dB(A)	风 量 Air Flow CFM	相 数 Phase	电 容 Capacitor μF/VAC
G18065HA$_1$B–C	Ball	100/125	50/60	0.42/0.55	46/59	2700/3000	60/62	355/385	1	3.3/250
G18065HA$_2$B–C	Ball	200/240	50/60	0.19/0.24	40/50	2700/3000	60/62	355/385	1	1.5/500
G18065HA$_3$B–C	Ball	380/420	50	0.15	40/50	2700	60	355	3	/

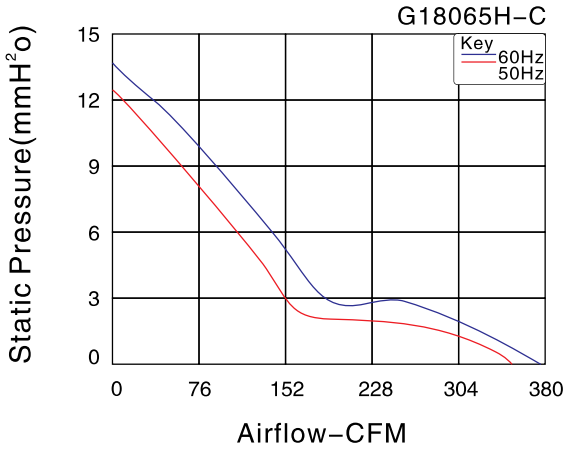

Fan Accessories

JL180FOR

本样册仅做选型参考,具体以规格书为准
This sample book is for reference only. Please refer to the specification for details.
如有特殊电压也可根据后面提供。本公司保留技术改动权利。
Special voltage may be provided if necessary according to the inquiry. Jiulong all technical modification rights reserved.

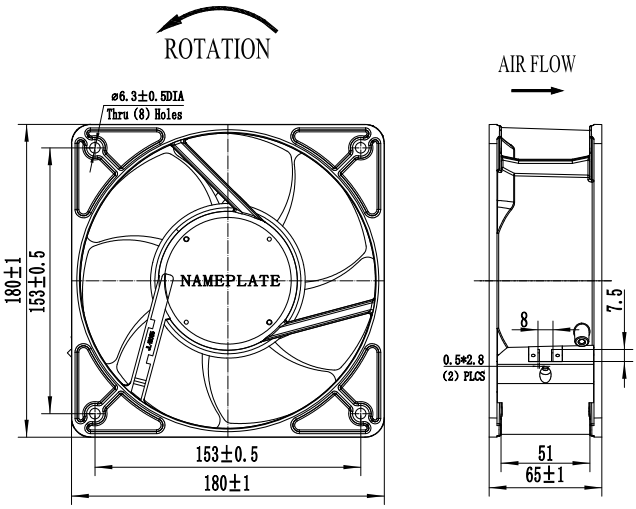

尺寸 Size: 180mm × 180mm × 65mm
风量 Airflow: 385CFM
重量 Weight: 1200g
噪音 Noise: 60dB(A)
风叶 Impeller Material: PBT UL94-V0 Reinforced Plasticl
外框 Frame: Aluminum Alloy
端子 Terminals: Terminal block
引线 Lead Wire: AWG#UL1332 22#(Optional)
马达 Motor: Capacitor-Run Induction Motor
温度范围 Operating Temperature: -10℃~+65℃

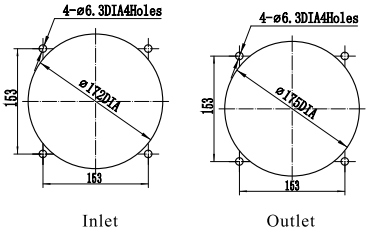

产品型号 Model	轴承型式 Bearing System	电 压 Voltage VAC	频 率 Freq. Hz	电 流 Current A	功 率 Power W	转 速 Speed RPM	噪 音 Noise dB(A)	风 量 Air Flow CFM	相 数 Phase	电 容 Capacitor μF/VAC
G18065HA$_2$BL	Ball	200/240	50	0.24	52	2600	60	385	1	1.5/500

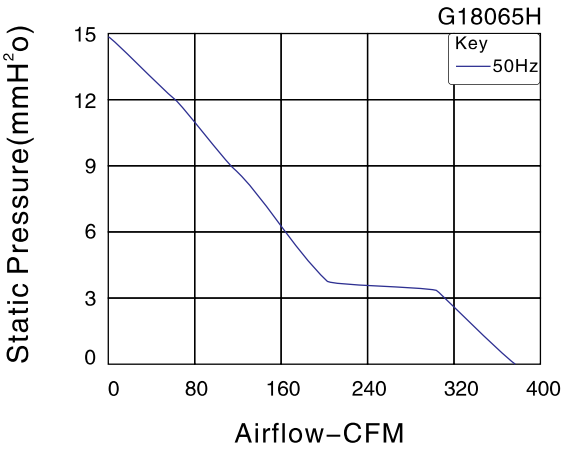

Fan Accessories

JL180FOR