




JULONG MOTOR
AC/DC FANS COOLING FANS




本样册仅供参考，具体以说明书为准。
This sample book is for reference only, please refer to the specification for details.
如蒙特殊电压也可根据洽询提供。本公司保留技术改动的权利。
Special voltage may be provided if necessary, according to the inquiry, along all technical modification rights reserved.

[Http://www.xtgygs.cn](http://www.xtgygs.cn)

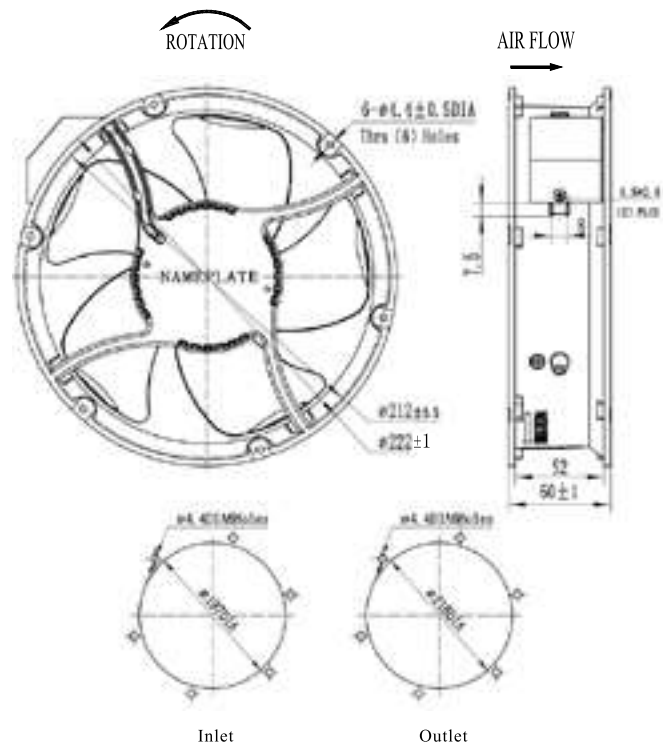

尺寸 Size: 220mm × 220mm × 60mm
风量 Airflow: 357~386CFM
重量 Weight: 1600g
噪音 Noise: 63~67dB(A)
风叶 Impeller Material: PBT UL94-V0 Reinforced Plastic
外框 Frame: Aluminum Alloy
端子 Terminals: Terminal block
引线 Lead Wire: AWG#UL1332 22#(Optional)
马达 Motor: Shaded Pole Induction Motor
温度范围 Operating Temperature: -10℃~+65℃

产品型号 Model	轴承型式 Bearing System	电压 Voltage VAC	频率 Freq. Hz	电流 Current A	功率 Power W	转速 Speed RPM	噪音 Noise dB(A)	风量 Air Flow CFM	相数 Phase	电容 Capacitor μ F/VAC
G22060HA ₂ BL	Ball	200/240	50/60	0.4/0.37	56/53	2800/3150	63/67	357/386	1	/

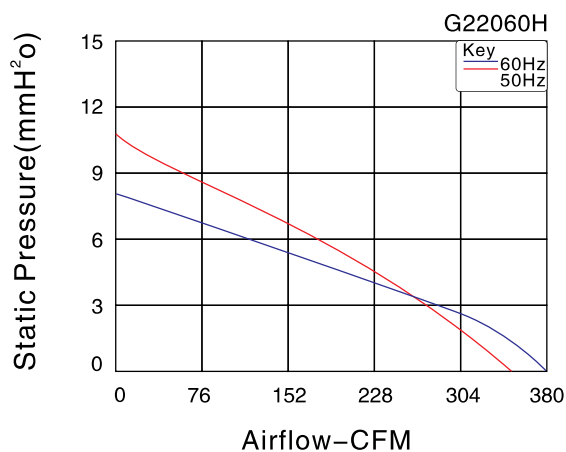

Fan Accessories




JL220FOR



JL220H(B)




JL9806.200
JL9805.200

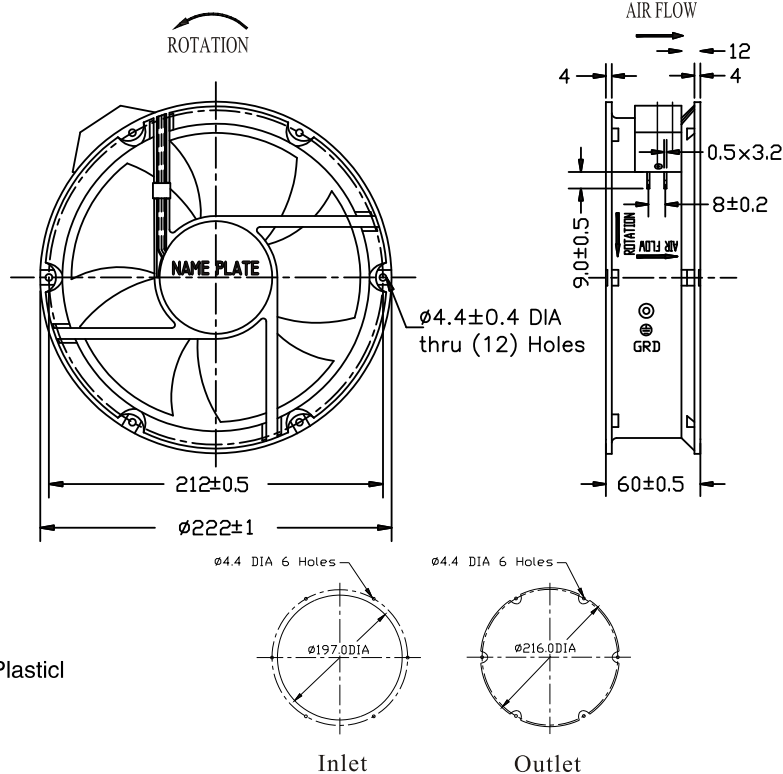


尺寸 Size: $\phi 200\text{mm} \times 60\text{mm}$
 风量 Airflow: 477~515CFM
 重量 Weight: 1350g
 噪音 Noise: 59~62dB(A)
 风叶 Impeller Material: PBT UL94-V0 Reinforced Plastic
 外框 Frame: Aluminum Alloy
 端子 Terminals: 0.5mm
 引线 Lead Wire: AWG#22 UL 1015(Optional)
 马达 Motor: Capacitor-Run Induction Motor
 温度范围 Operating Temperature: $-10^{\circ}\text{C} \sim +65^{\circ}\text{C}$

产品型号 Model	轴承型式 Bearing System	电压 Voltage VAC	频率 Freq. Hz	电流 Current A	功率 Power W	转速 Speed RPM	噪音 Noise dB(A)	风量 Air Flow CFM	相数 Phase	电容 Capacitor $\mu\text{F/VAC}$
G22060HA,B-C	Ball	100/125	50/60	0.42/0.46	50/60	2850/3150	59/62	477/515	1	3.3/500
G22060HA ₂ B-C	Ball	200/240	50/60	0.25/0.32	50/70	2850/3150	59/62	477/515	1	1.8/500

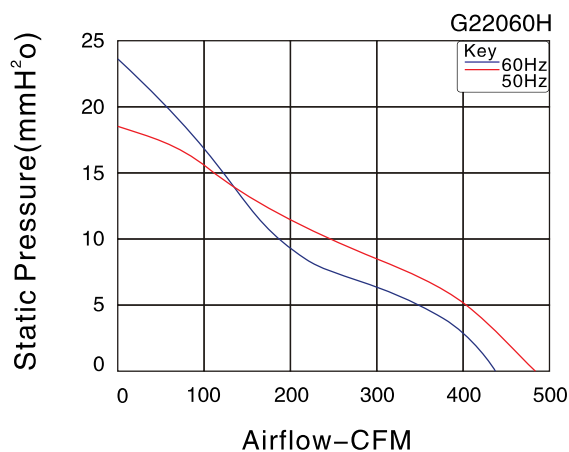

Fan Accessories



AC Axial Fan
AC轴流风机

AC All-Metal Axial Fan
AC全金属轴流风扇

DC Axial Fan
DC轴流风机


DC Centrifugal Fan
DC离心风机

EC Axial Fan
EC轴流风机

EC Centrifugal Fan
EC离心风机


AC Centrifugal Fan
AC离心风机

Fan Accessories
风机配件

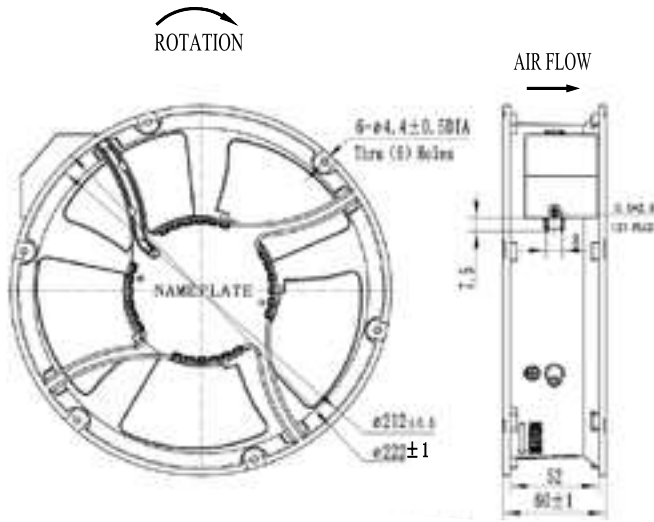

尺寸 Size: Ø220mm × 60mm
风量 Airflow: 427–490CFM
重量 Weight: 1560g
噪音 Noise: 63–68dB(A)
风叶 Impeller Material: Aluminium Alloy
外框 Frame: Aluminum Alloy
端子 Terminals: Terminal block
引线 Lead Wire: AWG#UL1332 22#(Optional)
马达 Motor: Capacitor–Run Induction Motor
温度范围 Operating Temperature: –10℃~+65℃

产品型号 Model	轴承型式 Bearing System	电压 Voltage VAC	频率 Freq. Hz	电流 Current A	功率 Power W	转速 Speed RPM	噪音 Noise dB(A)	风量 Air Flow CFM	相数 Phase	电容 Capacitor μ F/VAC
G22060HA ₁ B–C	Ball	100/120	50/60	0.35/0.43	40/48	2800/3300	63/68	427/490	1	3.3/500
G22060HA ₂ B–C	Ball	200/240	50/60	0.18/0.25	45/53	2800/3300	63/68	427/490	1	1/500
G22060HA ₃ B–C	Ball	380/400	50/60	0.08/0.09	42/55	2800/3300	63/68	427/490	3	—
G22060HA ₆ B–C	Ball	380/400	50/60	0.08/0.09	42/55	2800/3300	63/68	427/490	1	1/500

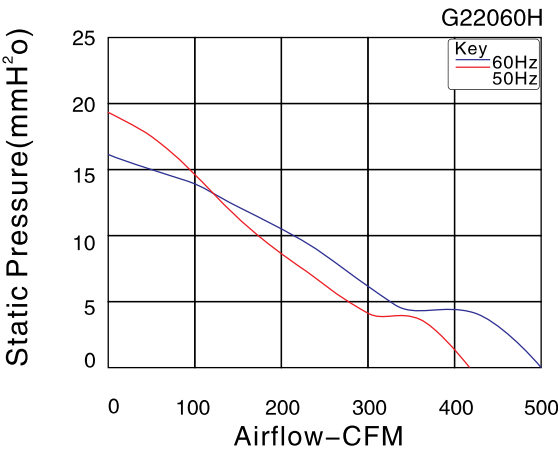

AC Axial Fan
AC轴流风机

AC All-Metal Axial Fan
AC全金属轴流风扇

DC Axial Fan
DC轴流风机

DC Centrifugal Fan
DC离心风机

EC Axial Fan
EC轴流风机

EC Centrifugal Fan
EC离心风机

AC Centrifugal Fan
AC离心风机

Fan Accessories
风机配件