



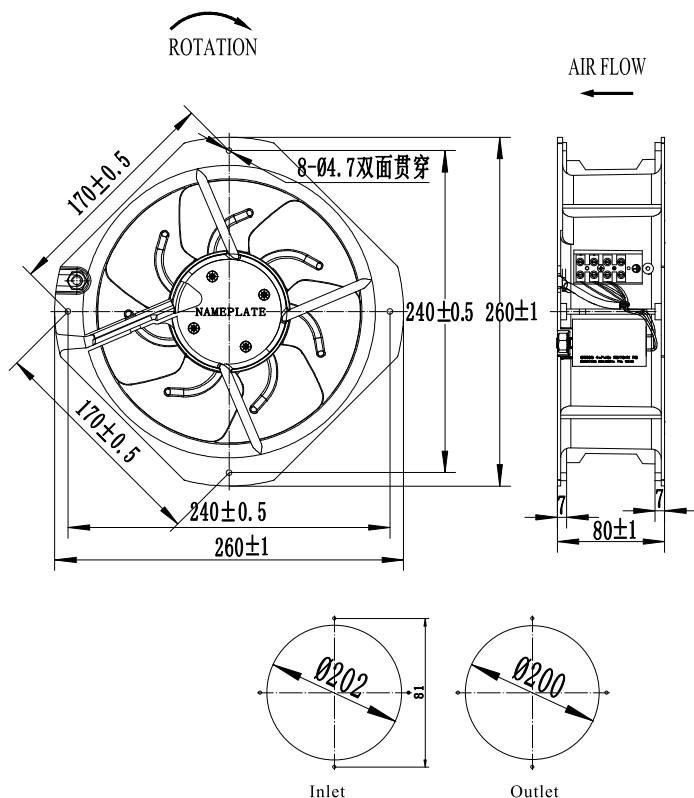

尺寸 Size: 225mm × 225mm × 80mm
风量 Airflow: 597~661CFM
重量 Weight: 2112g
噪音 Noise: 59~61dB(A)
风叶 Impeller Material: Metal
外框 Frame: Aluminum Alloy
端子 Terminals: 0.5mm
引线 Lead Wire: Teflon 22#UL 1332(Optional)
马达 Motor: Capacitor-Run And External Rotor Induction Motor
温度范围 Operating Temperature: -10℃~+65℃


产品型号 Model	轴承型式 Bearing System	电压 Voltage VAC	频率 Freq. Hz	电流 Current A	功率 Power W	转速 Speed RPM	噪音 Noise dB(A)	风量 Air Flow CFM	相数 Phase	电容 Capacitor μ F/VAC
TG22580HA _B -C-7P	Ball	100/125	50/60	0.68/0.65	60/72	2700/3100	59/61	597/661	1	4/250
TG22580HA _B -C-7P	Ball	200/240	50/60	0.25/0.33	54/71	2700/3100	59/61	597/661	1	2.2/500
TG22580HA _B -7P	Ball	380/420	50/60	0.25	50	2700/3100	59/61	597/661	3	—
TG22580HA _B -C-7P	Ball	380/420	50/60	0.23/0.2	68/76	2700/3100	59/61	597/661	1	1/500

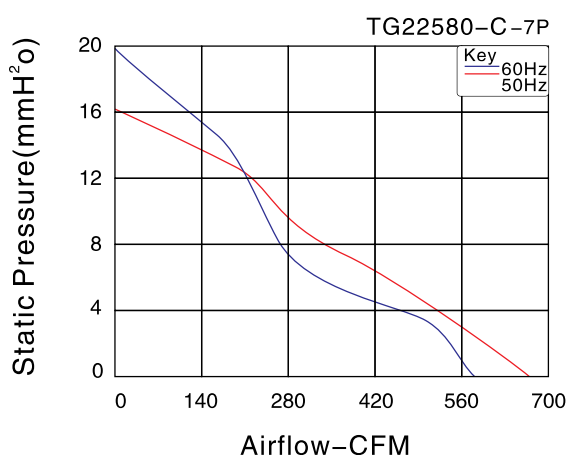


Fan Accessories




JL225FOR




JL500.200
JL905.200
JL905.200EMC
JL500.300EMC

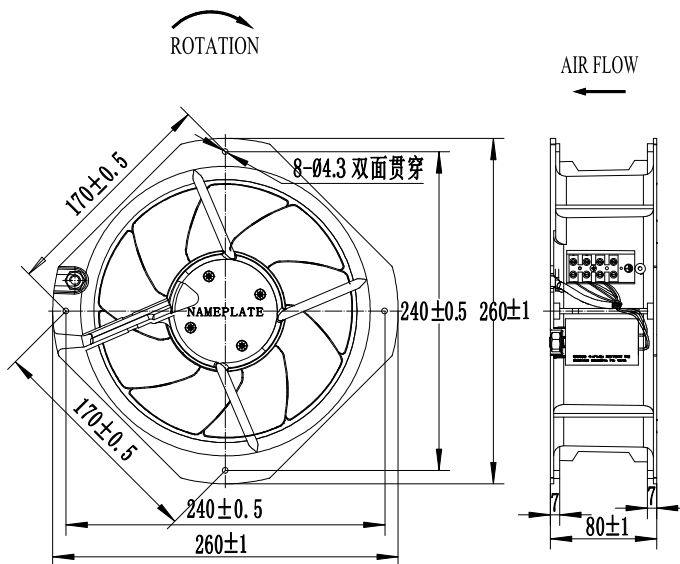


尺寸 Size: 225mm × 225mm × 80mm
 风量 Airflow: 585–625CFM
 重量 Weight: 2150g
 噪音 Noise: 59–61dB(A)
 风叶 Impeller Material: Metal
 外框 Frame: Aluminum Alloy
 端子 Terminals: 0.5mm
 引线 Lead Wire: Teflon 22#UL 1332(Optional)
 马达 Motor: Capacitor–Run And External Rotor Induction Motor
 温度范围 Operating Temperature: –10℃~+65℃

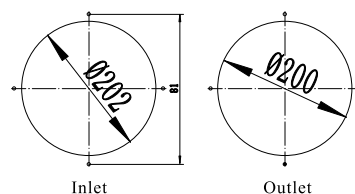

产品型号 Model	轴承型式 Bearing System	电压 Voltage VAC	频率 Freq. Hz	电流 Current A	功率 Power W	转速 Speed RPM	噪音 Noise dB(A)	风量 Air Flow CFM	相数 Phase	电容 Capacitor μ F/VAC
TG22580HA _B -C-9P	Ball	100/125	50/60	0.68/0.65	67/77	2600/2800	59/61	585/625	1	4/250
TG22580HA _B -C-9P	Ball	200/240	50/60	0.35/0.28	57/76	2600/2800	59/61	585/625	1	2.2/500
TG22580HA _B -9P	Ball	380/420	50/60	0.25	65	2600/2800	59/61	585/625	3	—
TG22580HA _B -C-9P	Ball	380/420	50/60	0.25	65	2600/2800	59/61	585/625	1	1/500

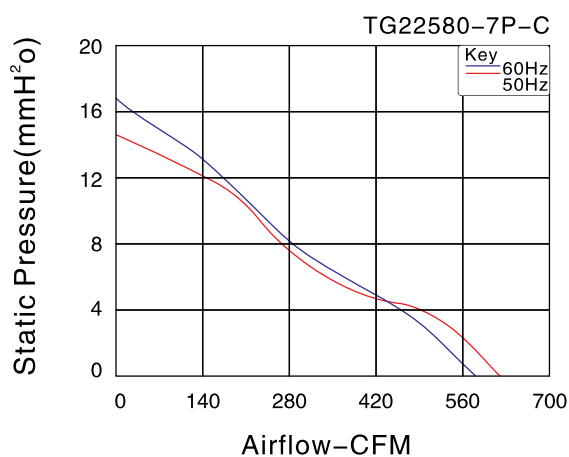

Fan Accessories



AC Axial Fan
AC轴流风机

AC All-Metal Axial Fan
AC全金属轴流风扇

DC Axial Fan
DC轴流风机

DC Centrifugal Fan
DC离心风机

EC Axial Fan
EC轴流风机

EC Centrifugal Fan
EC离心风机

AC Centrifugal Fan
AC离心风机

Fan Accessories
风机配件