



JULONG MOTOR
AC/DC FANS COOLING FANS



此产品符合RoHS指令，不含铅、汞、镉、铬、六价铬、多溴联苯、多溴联苯醚等有害物质。
This product is in accordance with the RoHS Directive, and does not contain lead, mercury, cadmium, chromium, hexavalent chromium, polybrominated biphenyls, polybrominated diphenyl ethers, and other harmful substances.

Http://www.xtgygs.cn



DC AXIAL FAN 60*60*25MM 2 SERIES

Material


UL 1007 AWG # 24 OR Equivalent

Red Wire:Positive (+)


Black Wire:Negative (-)

Yellow wire:FG or RD Signal

DIMENSIONS DRAWING

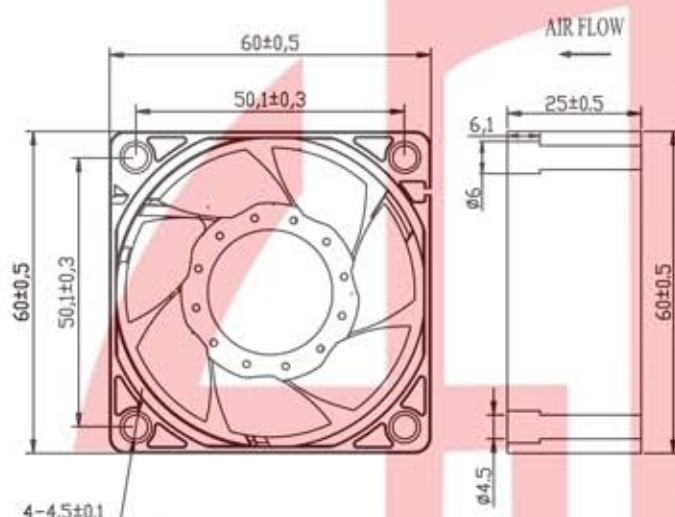

P & Q CURVE (AT RATED VOLTAGE)

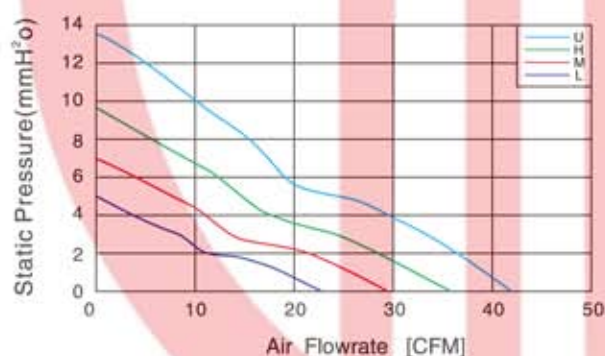

MODEL NO	RATED VOLTAGE V	OPERATING VOLTAGE V	RATED CURRENT A	ACTUAL CURRENT A	RATED POWER	RATED SPEED RPM ($\pm 10\%$)	MAX. AIR FLOW		MAX. STATIC AIR PRESSURE		NOISE LEVEL db(A)
							CMM	CFM	InH ₂ O	mmH ₂ O	
JL6025U12B	12	7~13.2	0.6	0.54	7.2	7200	1.226	43.28	0.681	17.3	47.8
JL6025H12B	12	7~13.2	0.3	0.27	3.6	6000	1.021	36.06	0.473	12.01	43.9
JL6025M12Y	12	7~13.2	0.24	0.21	2.88	5000	0.851	30.05	0.263	8.34	40.0
JL6025L12Y	12	7~13.2	0.2	0.18	2.4	4200	0.715	25.25	0.189	5.89	35.7
JL6025U24B	24	14~26.4	0.3	0.28	7.2	7200	1.226	43.28	0.681	17.3	47.8
JL6025H24B	24	14~26.4	0.2	0.18	4.8	6000	1.021	36.06	0.473	12.01	43.9
JL6025M24Y	24	14~26.4	0.14	0.12	3.36	5000	0.851	30.05	0.263	8.34	40.0
JL6025L24Y	24	14~26.4	0.1	0.09	2.4	4200	0.715	25.25	0.189	5.89	35.7
JL6025U48B	48	36~52.8	0.18	0.16	8.64	7200	1.226	43.28	0.681	17.3	47.8
JL6025H24B	48	36~52.8	0.12	0.1	5.76	6000	1.021	36.06	0.473	12.01	43.9
JL6025M24Y	48	36~52.8	0.09	0.08	4.32	5000	0.851	30.05	0.263	8.34	40.0
JL6025L24Y	48	36~52.8	0.06	0.05	2.88	4200	0.715	25.25	0.189	5.89	35.7

■ PS:Where Y can be S.B.