

PCB Connector

KLS electronic
www.cnkls.com

PCB Connector Series


KLS1-396 Pitch=3.96mm TYPE

Electrical Specification:


Rated Voltage: 50/250V AC/DC
Rated Current: 5A
Contact Resistance: 0.02 Ohm max
Insulation Resistance: 1000M Ohm min
Withstand voltage: 1500V AC/MIN
Temperature range for usage : -25°C~+85°C
P.C board thickness : 1.6mm

Material:

Housing: PA66 (PA66) UL94V-2
Contacts: Brass or Phosphor Bronze
Plating: Tin 50u" over 100u" nickel
Wire range : AWG#24#18

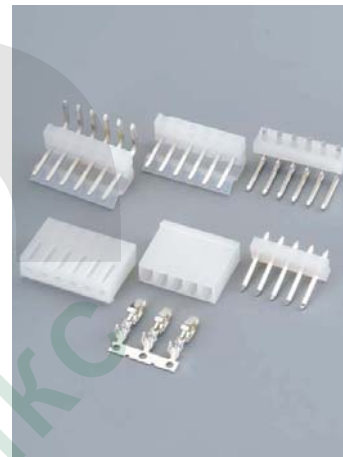

Housing

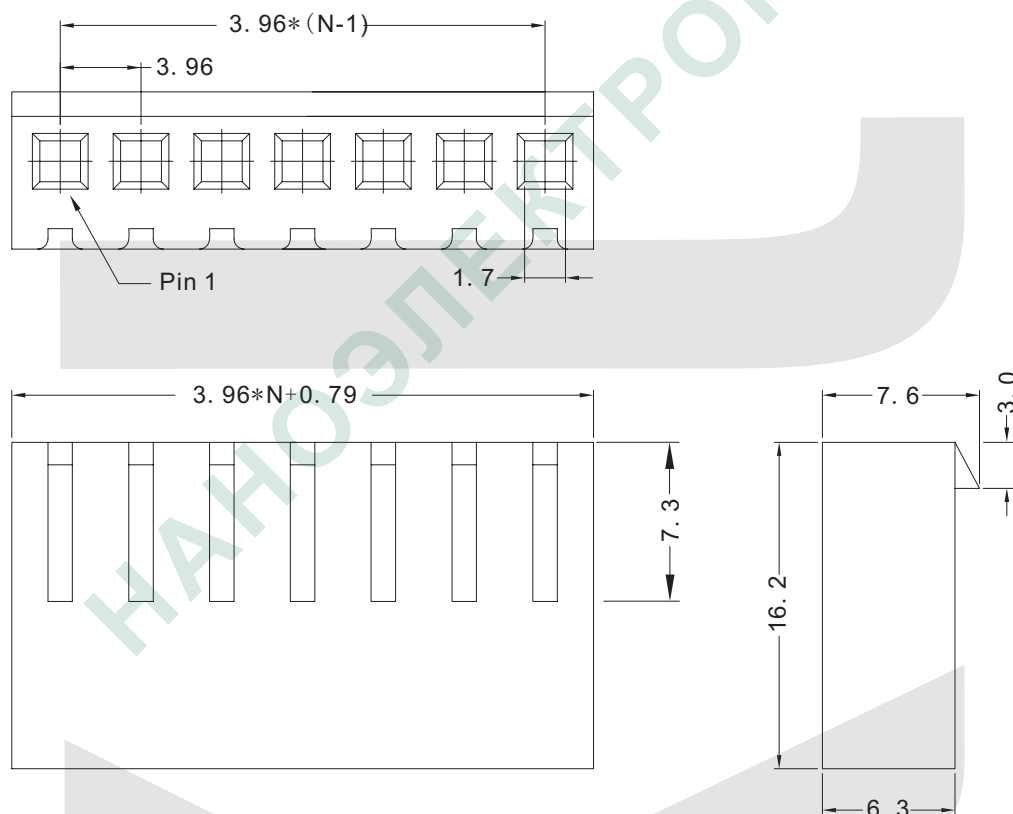

ORDER INFORMATION

Product NO.: KLS1-3.96-XX-H

Pitch: 3.96=3.96mm

Type: H=Housing
S=Straight Male pin

T=Terminal
R=Right Male pin

PIN Number: 02 ~ 16Pin

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information

PCB Connector

KLS electronic
www.cnkls.com

PCB Connector Series


KLS1-396 Pitch=3.96mm TYPE

Electrical Specification:

Rated Voltage: 50/250V AC/DC
Rated Current: 5A
Contact Resistance: 0.02 Ohm max
Insulation Resistance: 1000M Ohm min
Withstand voltage: 1500V AC/MIN
Temperature range for usage: -25°C~+85°C
P.C board thickness: 1.6mm


Material:

Housing: PA66 (PA66) UL94V-2
Contacts: Brass or Phosphor Bronze
Plating: Tin 50u" over 100u" nickel
Wire range: AWG#24#18

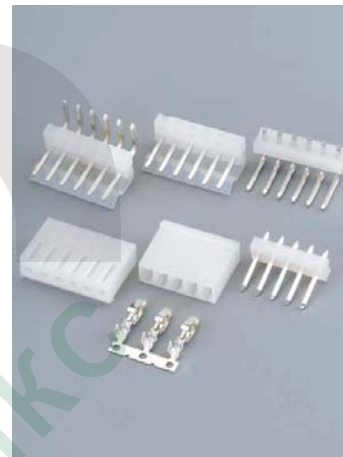

I

Terminal

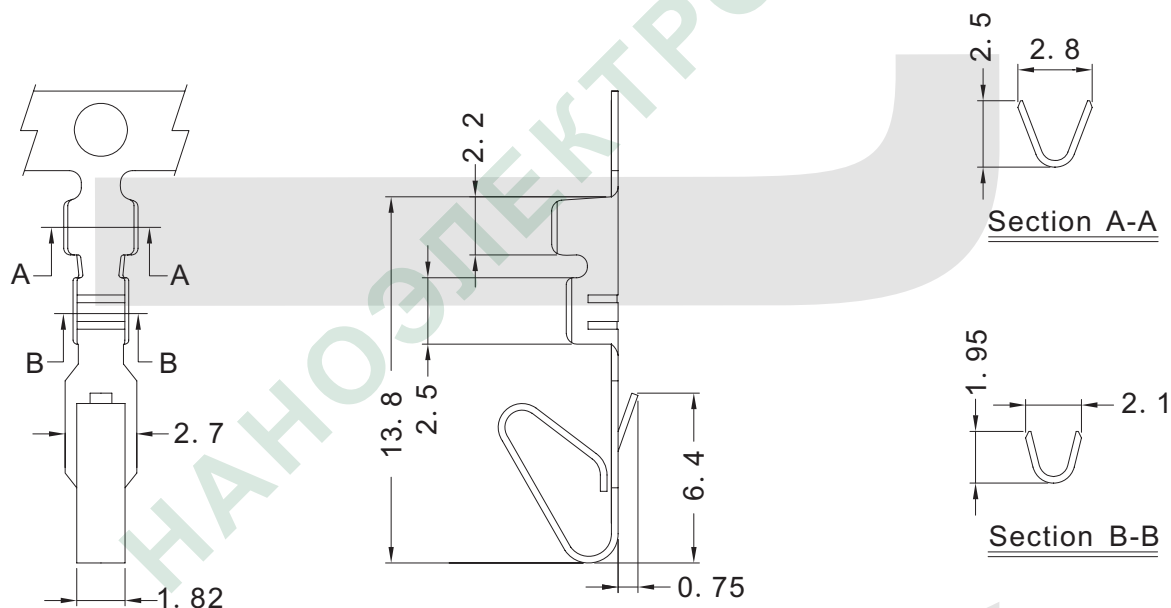

ORDER INFORMATION

Product NO.: KLS1-3.96-T

Pitch: 3.96=3.96mm

Type: H=Housing
S=Straight Male pin
T=Terminal
R=Right Male pin

PCB Connector

KLS electronic
www.cnkls.com

PCB Connector Series


KLS1-396 Pitch=3.96mm TYPE

Electrical Specification:


Rated Voltage: 50/250V AC.DC
Rated Current: 5A
Contact Resistance: 0.02 Ohm max
Insulation Resistance: 1000M Ohm min
Withstand voltage: 1500V AC/MIN
Temperature range for usage : -25°C~+85°C
P.C board thickness : 1.6mm

Material:

Housing: PA66 (PA66) UL94V-2
Contacts: Brass or Phosphor Bronze
Plating: Tin 50u" over 100u" nickel
Wire range : AWG#24#18

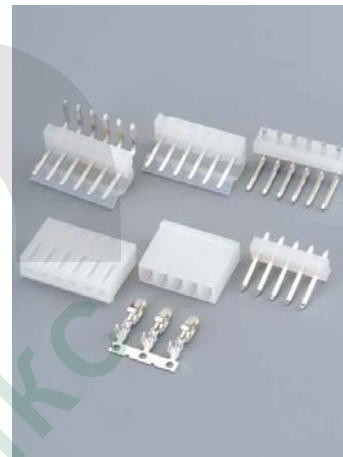

Straight

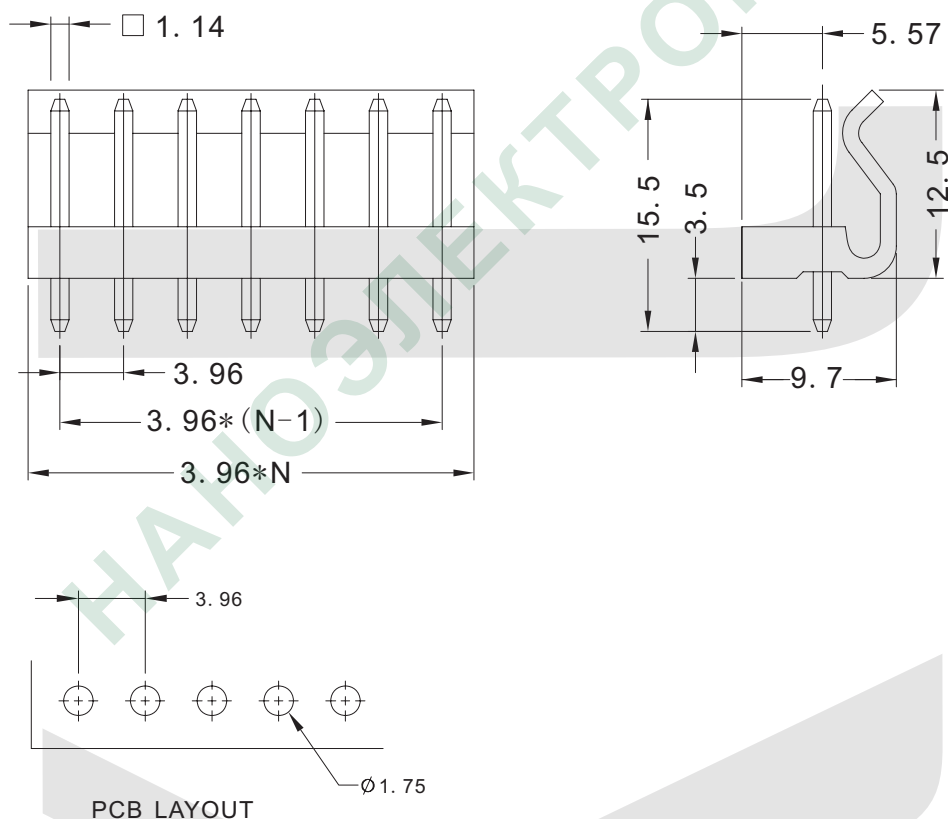

ORDER INFORMATION

ProductNO.:KLS1-396-XX-S

Pitch: 3.96=3.96mm

Type: H=Housing
S=Straight Male pin
T=Terminal
R=Right Male pin
PIN Number: 02 ~ 16Pin

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information

PCB Connector

KLS electronic
www.cnkls.com

PCB Connector Series


KLS1-396 Pitch=3.96mm TYPE

Electrical Specification:


Rated Voltage: 50/250V AC.DC
Rated Current: 5A
Contact Resistance: 0.02 Ohm max
Insulation Resistance: 1000M Ohm min
Withstand voltage: 1500V AC/MIN
Temperature range for usage : -25°C~+85°C
P.C board thickness : 1.6mm

Material:

Housing: PA66 (PA66) UL94V-2
Contacts: Brass or Phosphor Bronze
Plating: Tin 50u" over 100u" nickel
Wire range : AWG#24#18

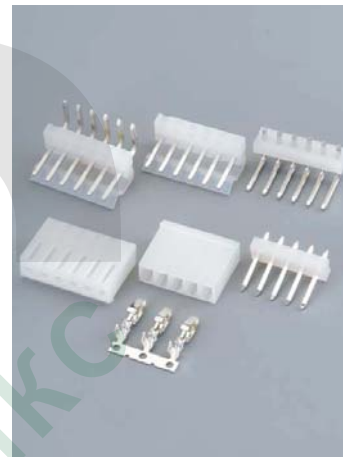

Right angle

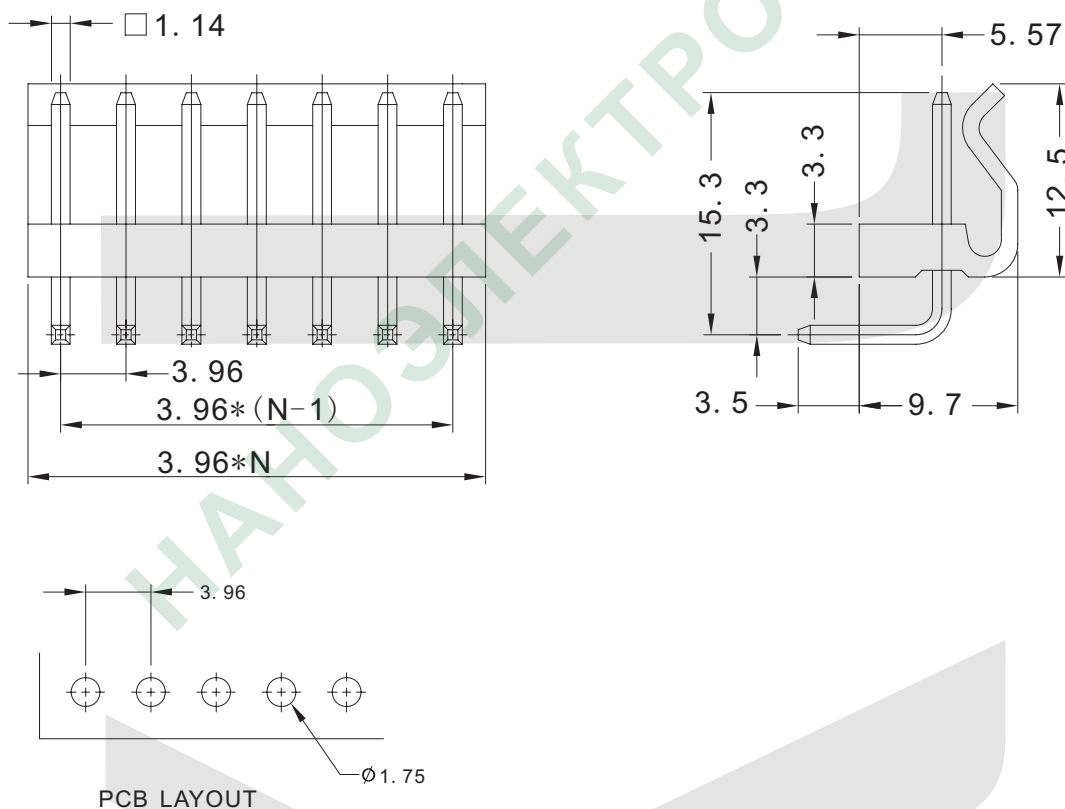

ORDER INFORMATION

ProductNO.:KLS1-396-XX-R

Pitch: 3.96=3.96mm

Type: H=Housing
S=Straight Male pin
T=Terminal
R=Right Male pin
PIN Number: 02 ~ 16Pin