

Circular Connector

Russia Standard PC Type

KLS15-RCS01-PC4 type small connector


KLS15-RCS01-PC series are used widely in all kinds of electronic equipment. This connect is small in size and light in weight. The flange are round and square.

Technical characteristics

Operating voltage:250V
 Rated current:5A
 Contact Resistance :<5MΩ
 Insulation resistance:<3000MΩ
 Temperature: -55°C~+125°C
 Relative Humidity: 93% at 40±2°C
 Atmospheric pressure: 101.33~6.7kpa
 Vibration, the peak impact acceleration: 10~2000Hz 196m / s²
 Mechanical shock, the peak impact acceleration: 196m / s²
 Endurance :500cycles
 Water proof: IP≥68
 The connect is water-repellent in one meter deep water for 30 minutes



Structure of Insulator

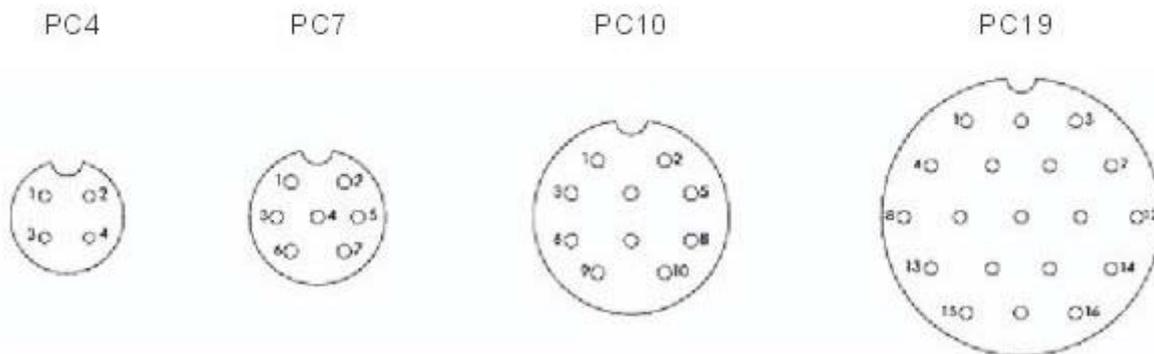

ORDER INFORMATION

Product NO.: KLS15-RCS01-PC4 **T B**

Pins: 4,7,10,19pin

Type: T-Plug (Female+Cover)
 B-Flange Receptacle
 F- Female Plug
 C-Cover



T-Plug (Female+Cover)



B-Flange Receptacle



C-Cover

