

Coin Cell Holders

KLS5-CR2032-11 CR2032 Coin Battery Holder

Material:

Housing: PPA

Contacts: Copper plating 1u"







Electrical Characteristics:

Insulator Resistance: 1000M Ohm min.

Contact Resistance: 30m Ohm max.

Dielectric voltage: 500V AC

Operating Temperature: -25°C~+85°C

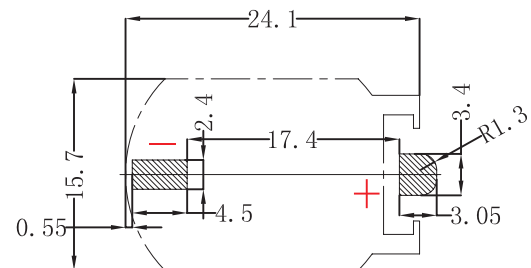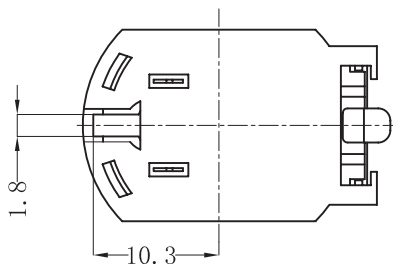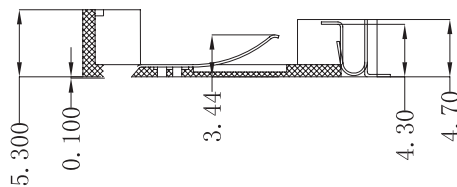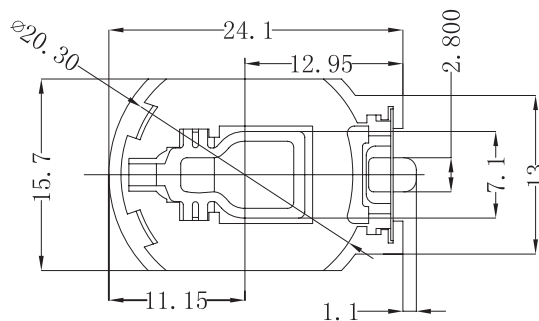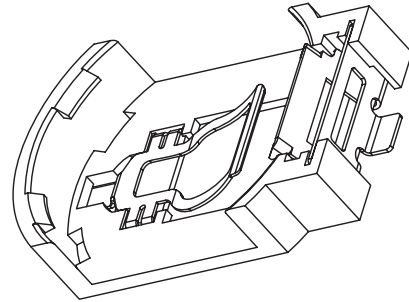

PCB Layout Diagram
Top View

ORDER INFORMATION

Product NO.: KLS5-CR2032-11-R

