

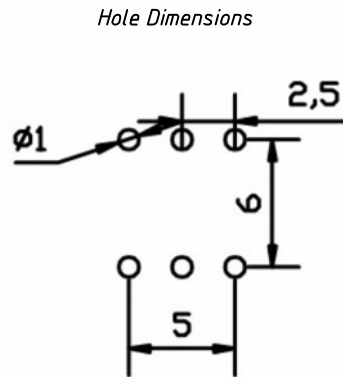
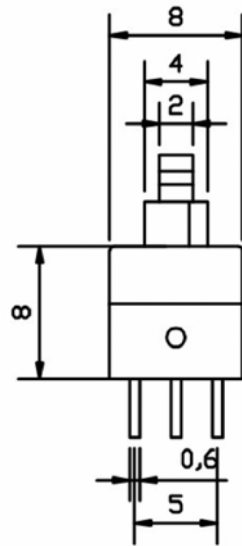



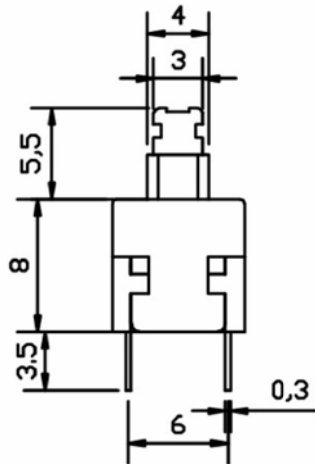

Circuit Diagram



- Material:
- 1.Cover:Polycarbonate
 - 2.Housing:PA66
 - 3.Spring:Carbon cable steel wire
 - 4.Contacts:POM
 - 5.Reed
 - 6.Crochet hook

Specification:

Rating: 0.1A 30V DC

Contact Resistance:0.03Ω Max

Insulation Resistance:100MΩ Min

Withstanding Voltage: AC 250V (50Hz) min

Mechanical Life: 100000 Cycles

Electrical Life: 50000 Cycles

Operating Force: 160 ± 80g

Order Information:

L-KLS7-P8.0×8.0-X

L: RoHS

Mini Push Switch

8.0×8.0mm

Function:

0 = Non Lock Type

1 = With Lock Type

ANGLE TOLERANCE	PROJECTION	Description:
±3°		Mini Push Switch 8.0X8.0mm
GENERAL TOLERANCE	UNITS	mm
x.x ±0.30	SHEET SIZE	A4
x.xx ±0.20	Draw:	Daniel
x.xxx ±0.10	Check:	Daniel
		KLS P/N:
		L-KLS7-P8.0×8.0-X
		KLS ELECTRONIC CO.,L TD.