

Pin Header Series

KIS1-203A 2.54mm Mini Jumper Series

Electrical Specification:


Current Rating: 1 AMP
 Insulator Resistance: 5000M Ohm, min. at DC 500V
 Contact Resistance: 20m Ohm, max. at DC 100mA
 Operating Temperature: -55°C~+105°C

Material:

Housing: 30% Glass filled PBT UL94V-0
 Contacts: Brass or Phosphor Bronze
 Plating: Selective gold plated: gold plated on mating area and nickel plated on wire cutting area
 Gold plated: 3u" over 50u" nickel



OPEN

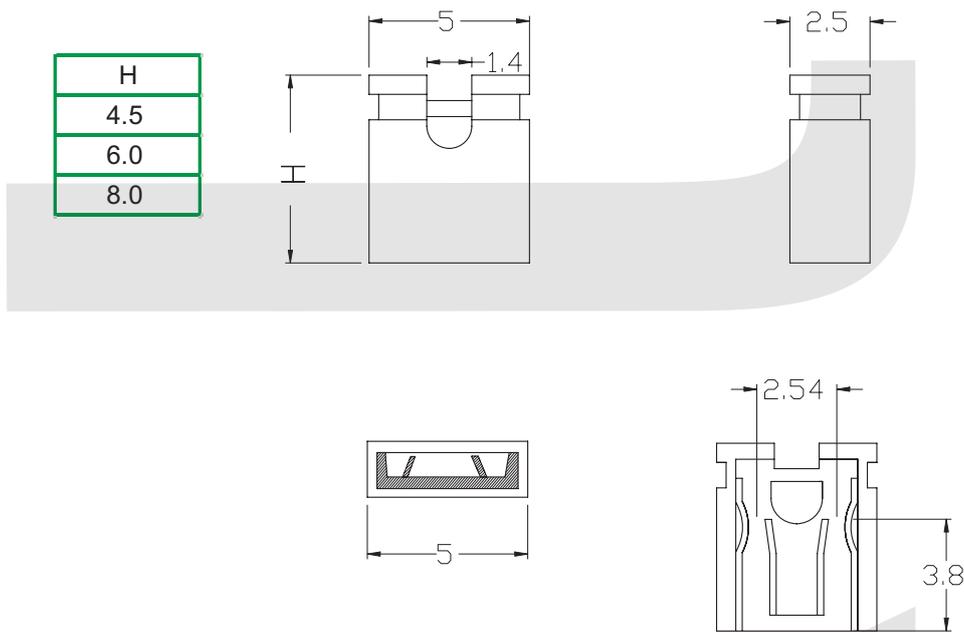

ORDER INFORMATION

Product NO.: KLS1-203 A-O-B-6.0

Pos. NO. _____
 Series No. _____
 Pitch: A=2.54mm B=2.00mm
 Housing Type: O-Open C-Close
 Color: B-Black R-Red L-Blue G-Green

Height:
 Pitch 2.54mm Open Type:4.5mm / 6.0mm / 8.0mm / 13.5mm
 Pitch 2.54mm Close Type:6.5mm / 8.5mm
 Pitch 2.0mm Open Type:3.5mm / 4.5mm
 Pitch 2.0mm Close Type:5.0mm

Pin Header Series


KIS1-203A 2.54mm Mini Jumper Series

Electrical Specification:


Current Rating: 1 AMP
 Insulator Resistance: 5000M Ohm, min. at DC 500V
 Contact Resistance: 20m Ohm, max. at DC 100mA
 Operating Temperature: -55°C~+105°C

Material:

Housing: 30% Glass filled PBT UL94V-0
 Contacts: Brass or Phosphor Bronze
 Plating: Selective gold plated: gold plated on mating area and nickel plated on wire cutting area
 Gold plated: 3u" over 50u" nickel

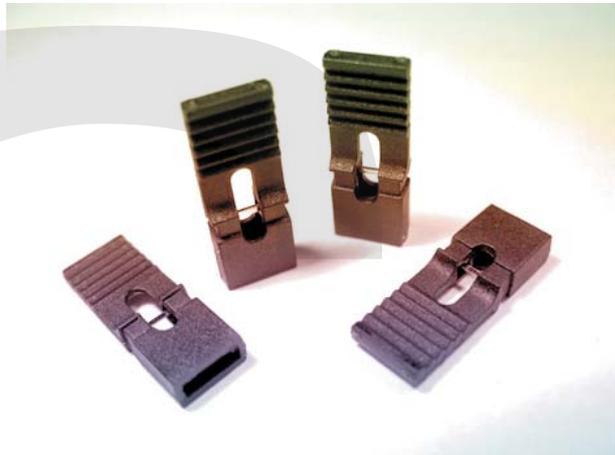

OPEN

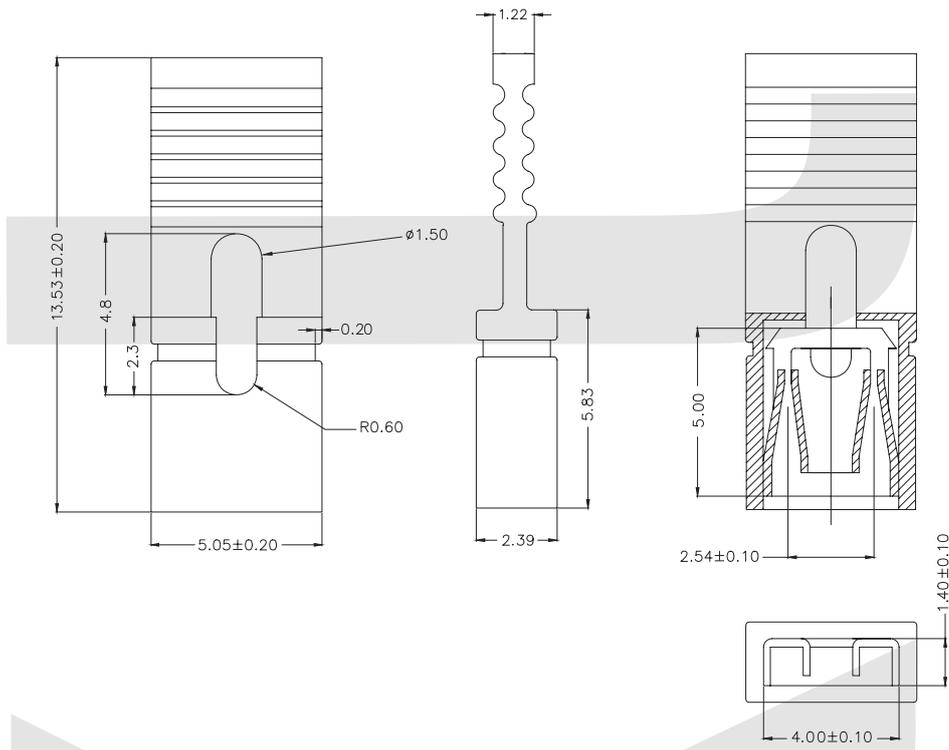

ORDER INFORMATION

Product NO.: KLS1-203 A-O-B-13.5

Pos. NO.	_____	Height:	_____
Series No.	_____	Pitch 2.54mm Open Type:	4.5mm / 6.0mm / 8.0mm / 13.5mm
Pitch: A=2.54mm B=2.00mm	_____	Pitch 2.54mm Close Type:	6.5mm / 8.5mm
Housing Type: O-Open C-Close	_____	Pitch 2.0mm Open Type:	3.5mm / 4.5mm
Color: B-Black R-Red L-Blue G-Green	_____	Pitch 2.0mm Close Type:	5.0mm

Pin Header Series

KIS1-203A 2.54mm Mini Jumper Series

Electrical Specification:


Current Rating: 1 AMP
 Insulator Resistance: 5000M Ohm, min. at DC 500V
 Contact Resistance: 20m Ohm, max. at DC 100mA
 Operating Temperature: -55°C~+105°C

Material:

Housing: 30% Glass filled PBT UL94V-0
 Contacts: Brass or Phosphor Bronze
 Plating: Selective gold plated: gold plated on mating area and nickel plated on wire cutting area
 Gold plated: 3u" over 50u" nickel



CLOSE

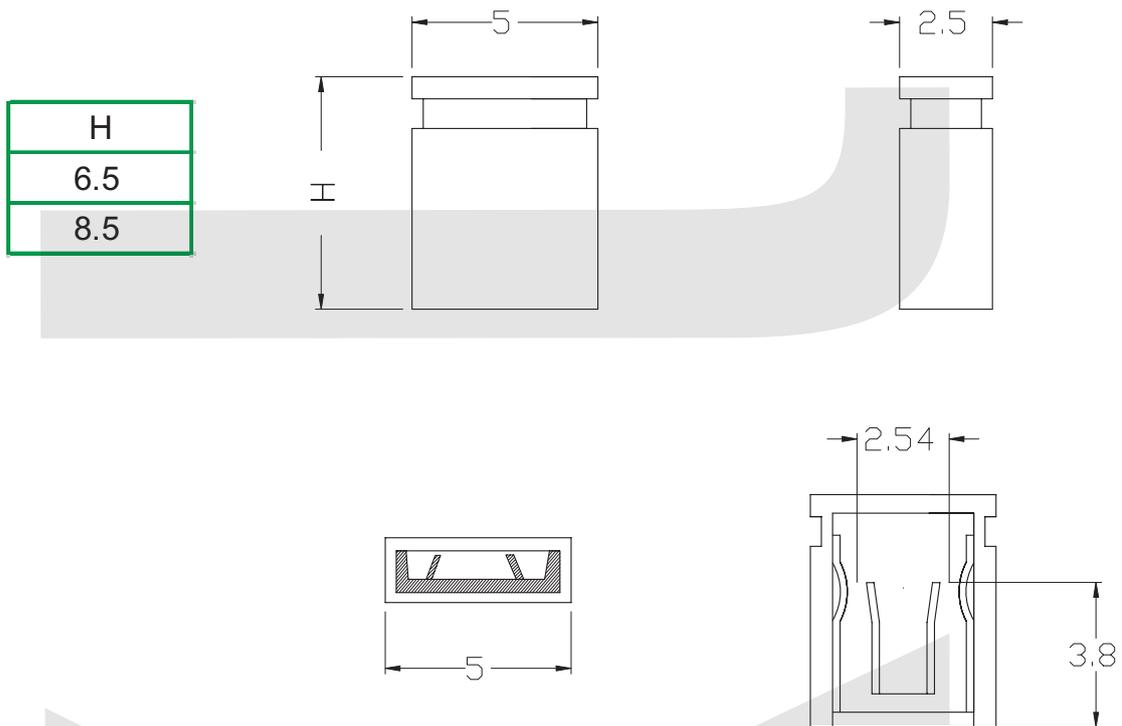

ORDER INFORMATION

Product NO.: KLS1-203 A-C-B-6.0

Pos. NO.	Series No.	Pitch: A=2.54mm B=2.00mm	Housing Type: O-Open C-Close	Color: B-Black R-Red L-Blue G-Green	Height: Pitch 2.54mm Open Type:4.5mm / 6.0mm / 8.0mm / 13.5mm Pitch 2.54mm Close Type:6.5mm / 8.5mm Pitch 2.0mm Open Type:3.5mm / 4.5mm Pitch 2.0mm Close Type:5.0mm
----------	------------	--------------------------	------------------------------	-------------------------------------	--