
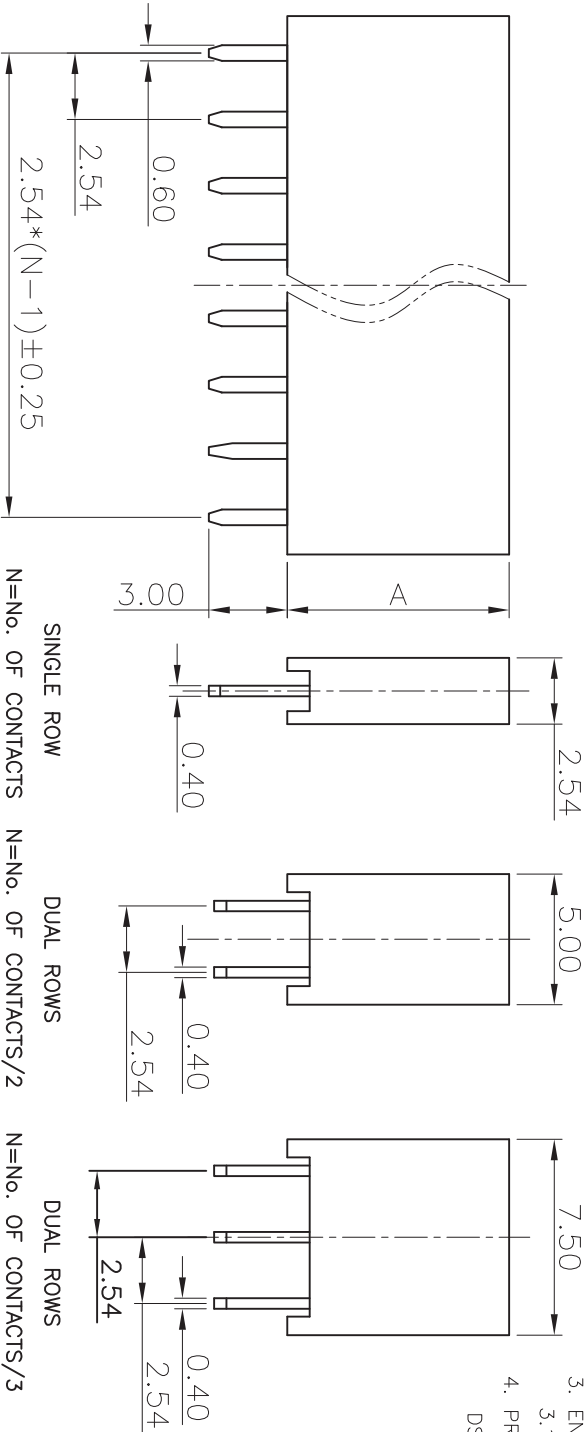


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 10/22/09'	~	LJC 10/22/09'
B	Drawing correction	JLZ 02/10/15'	~	

NOTES:

1. ELECTRICAL CHARACTERISTICS:
1.1 CONTACT RESISTANCE: 20mΩ Max. INITIAL.
1.2 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(ms)
FOR 1 MINUTE.
1.3 INSULATION RESISTANCE: 1000MΩ Min.
2. MECHANICAL CHARACTERISTICS:
2.1 CONTACT RETENTION FORCE: 500gf Min.
3. ENVIRONMENT CHARACTERISTICS:
3.1 TEMPERATURE RANGE: -40°C ~ +105°C.
4. PRODUCT NUMBER CODE:

DS1023- X X X X
PROFILE HEIGHT(DIM A)
1: 8.5mm
2: 5.0mm
CONTACT PLATING
F1: FULL GOLD FLASH
2: NICKEL + GOLD FLASH
MOUNTING TYPE
S: Straight TYPE
No. OF CONTACTS
1*1-1*40
2*2-2*40
3*3-3*40

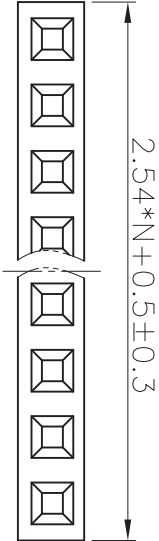

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE	FEMALT HEADER PITCH
X.	±0.60	X.	±5°	UNITS		2.54mm V/T SINGLE/DUAL ROWS TYPE
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES DS1023 SERIES
.XX	±0.25	.XX	±2°			
DRAWING TYPE		CUSTOMER		SCALE	1:1	SHEET 1 OF 1
DRAWING NO.		C-DS1023-XXX1-B				

晨翔电子有限公司