


Bridge rectifiers

FEATURES


- Plastic Package has Underwriters Laboratory Flammability Classification 94V-0
- Glass passivated chip junctions
- Surge overload rating of 30 Amperes peak
- Ideal for printed circuit board
- We declare that the material of product compliance with RoHS requirements.

B1S Thru B10S

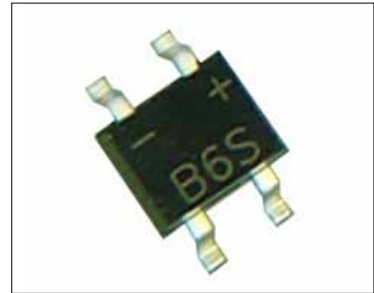

MECHANICAL DATA

- Case: Molded plastic
- Weight: 0.02 ounce, 0.5 gram
- High temperature soldering guaranteed :
260°C/10seconds

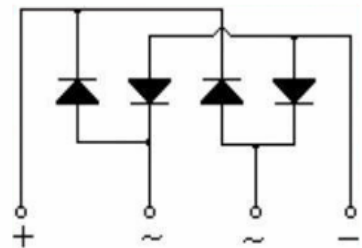

Circuit Diagram

Product Characteristic

Parameter Symbol	Symbol	B1S	B2S	B4S	B6S	B8S	B10S	Unit
Maximum repetitive voltage	V _{RM}	100	200	400	600	800	1000	V
Maximum DC reverse current at rated DC blocking voltage	I _R	5						μA
		250						
Maximum Average Forward Rectified Current Tc=40°C	I _O	0.5						A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load	I _{FSM}	30						A
Maximum instantaneous forward voltage at 0.5A	V _F	1.00						V
Operating junction temperature	T _J	125						°C
Storage temperature	T _{stg}	-40~150						°C

Characteristic Curves

Fig. 1 derating Curve

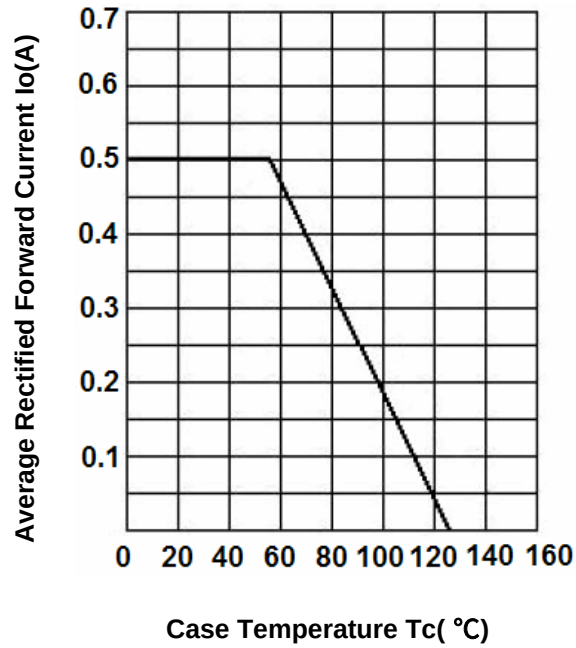


Fig.2 Typical Reverse Characteristics

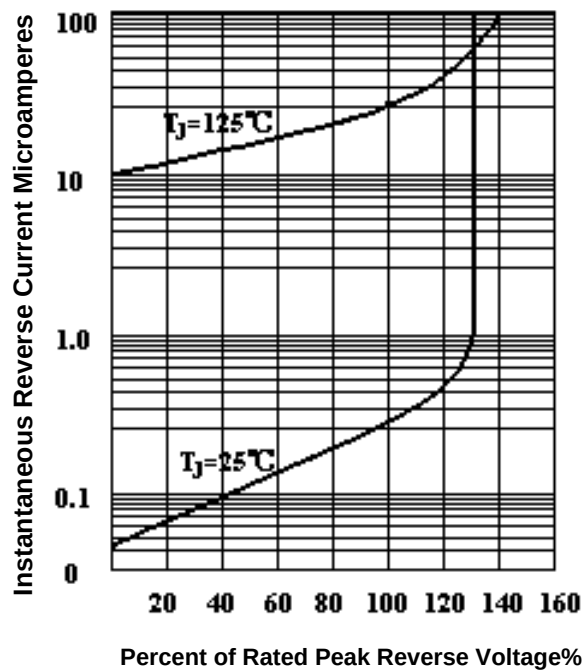


Fig.3 Peak Surge Forward capability



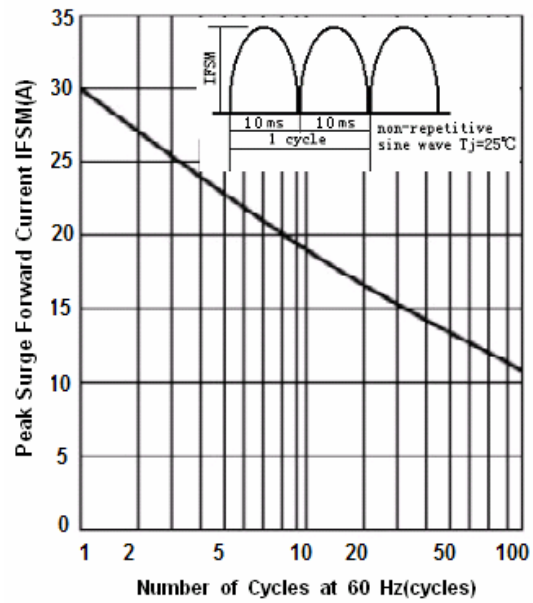


Fig.4 Forward Voltage

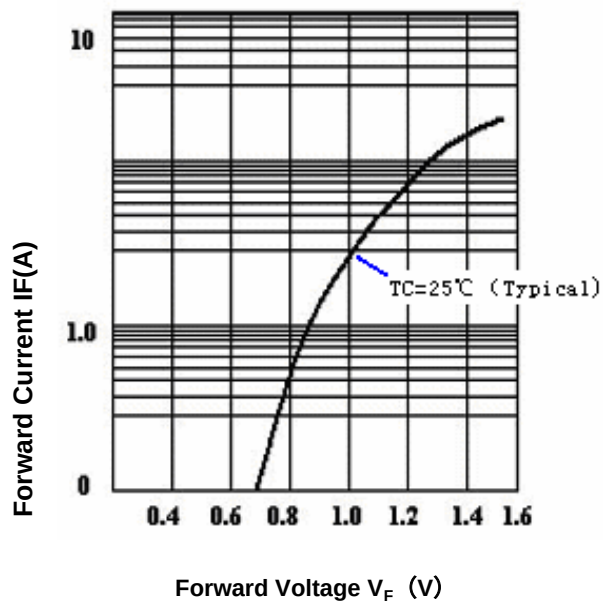

SHAPE AND DIMENSIONS

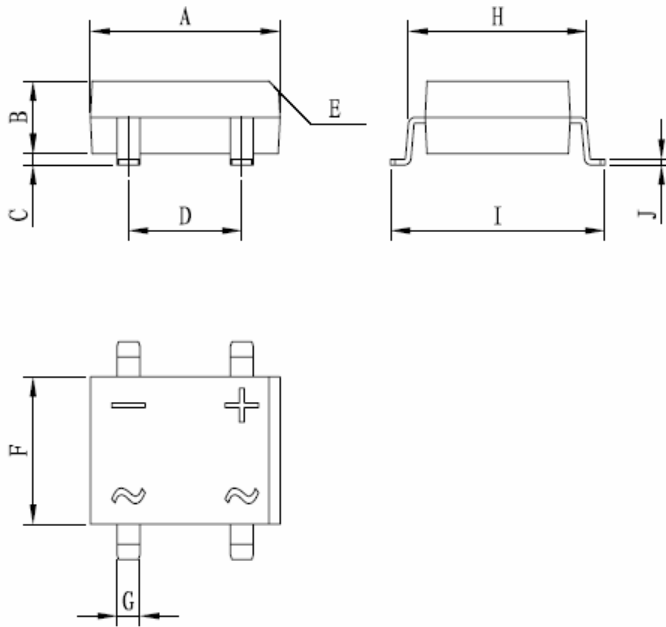

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.177	0.193	4.50	4.90
B	0.091	0.106	2.30	2.70
C	0.012	0.028	0.30	0.70
D	0.091	0.106	2.30	2.70
E	0.039 *45 °		1*45 °	
F	0.150	0.165	3.80	4.20
G	0.020	0.031	0.50	0.80
H	0.181	0.220	4.60	5.60
I	0.236	0.276	6.00	7.00
J	0.006	0.014	0.15	0.35

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: mm.