



OUTLINE DRAWING

Dimensions in mm

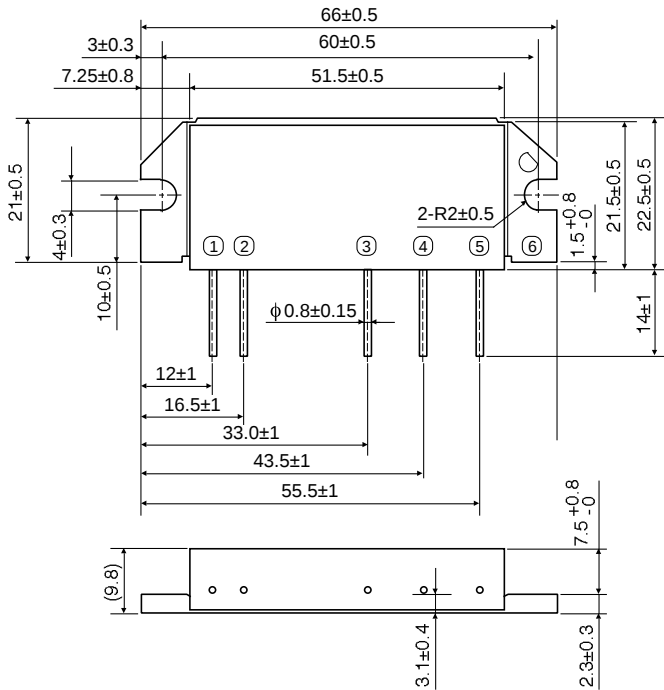

H3

BLOCK DIAGRAM

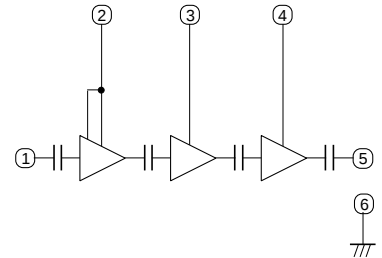

PIN:

- ①Pin : RF INPUT
- ②VCC1: 1st. DC SUPPLY
- ③VCC2: 2nd. DC SUPPLY
- ④VCC3: 3rd. DC SUPPLY
- ⑤Po : RF OUTPUT
- ⑥GND: FIN

ABSOLUTE MAXIMUM RATINGS (Tc=25°C unless otherwise noted)

Symbol	Parameter	Conditions	Ratings	Unit
Vcc	Supply voltage	ZG=ZL=50W	17	V
Icc	Total current	ZG=ZL=50W	10	A
P _{in} (max)	Input power	ZG=ZL=50W, Vcc1£12.5V	600	mW
P _o (max)	Output power	ZG=ZL=50W, Vcc1£12.5V	30	W
T _c (OP)	Operation case temperature	ZG=ZL=50W, Vcc1£12.5V	-30 to +110	°C
T _{stg}	Storage temperature		-40 to +110	°C

Note. Above each maximum ratings are guaranteed independently.

ELECTRICAL CHARACTERISTICS (Tc=25°C unless otherwise noted)

Symbol	Parameter	Test conditions	Limits		Unit
			Min	Max	
f	Frequency range		300	308	MHz
P _o	Output power	P _{in} =300mW, Vcc1, 2, 3=12.5V, ZG=ZL=50W	20		W
h _T	Total efficiency		40		%
2f _o	2nd. harmonic			-30	dBc
3f _o	3rd. harmonic			-30	dBc
r _{in}	Input VSWR			2.8	-
-	Load VSWR tolerance	Vcc1, 2, 3=15.2V, P _o =20W (P _{in} :Controlled), ZG=50W, Load VSWR=20:1 (All phase)	No degradation or destroy		-

Note. Above parameters, ratings, limits and test conditions are subject to change.

TYPICAL PERFORMANCE DATA

