

MITSUBISHI DIODE MODULES
RM75TPM-H,-2H

MEDIUM POWER GENERAL USE
INSULATED TYPE

RM75TPM-H,-2H



- I_o DC output current 150A
- V_{RRM} Repetitive peak reverse voltage 800/1600V
- 3 phase bridge
- Insulated Type
- UL Recognized


Yellow Card No. E80276 (N)
File No. E80271

APPLICATION

AC motor controllers , DC motor controllers, Battery DC power supplies,
DC power supplies for control panels, and other general DC power equipment

OUTLINE DRAWING & CIRCUIT DIAGRAM

Dimensions in mm

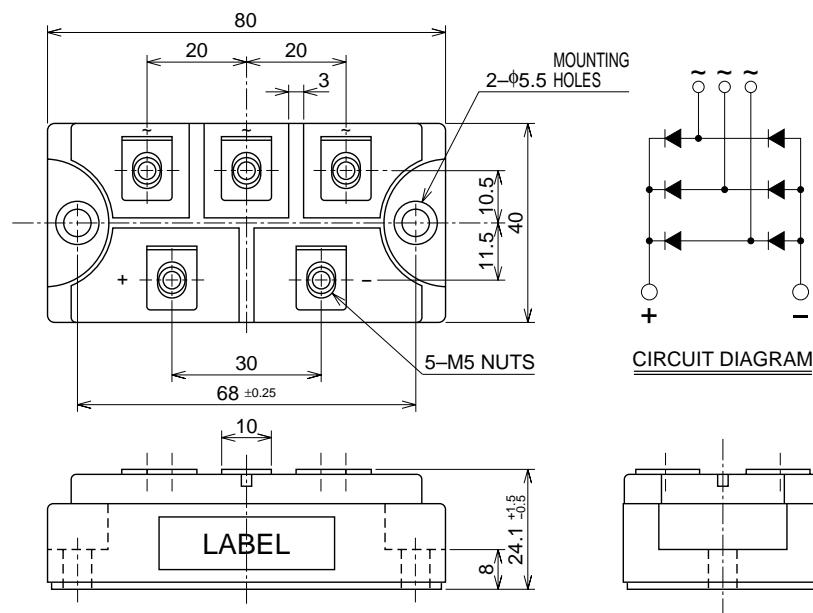

Mar.2002

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Voltage class		Unit
		H	2H	
V _{RRM}	Repetitive peak reverse voltage	800	1600	V
V _{RSM}	Non-repetitive peak reverse voltage	960	1700	V
E _a	Recommended AC input voltage	220	440	V


Symbol	Parameter	Conditions	Ratings	Unit
I _o	DC output current	Three-phase full wave rectifying circuit, T _c =85°C	150	A
I _{FSM}	Surge (non-repetitive) forward current	One half cycle at 60Hz, peak value	1500	A
I ² t	I ² t for fusing	Value for one cycle of surge current	9380	A ² s
f	Maximum operating frequency		1000	Hz
T _j	Junction temperature		-40~+150	°C
T _{stg}	Storage temperature		-40~+125	°C
V _{iso}	Isolation voltage	Charged part to case	2500	V
—	Mounting torque	Main terminal screw M5	1.47~1.96	N·m
			15~20	kg·cm
		Mounting screw M5	1.47~1.96	N·m
	Weight	Typical value	15~20	kg
			200	g

ELECTRICAL CHARACTERISTICS


Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
I _{RRM}	Repetitive reverse current	T _j =150°C, V _{RRM} applied	—	—	15	mA
V _{FM}	Forward voltage	T _j =25°C, I _{FM} =100A, instantaneous meas.	—	—	1.3	V
R _{th} (j-c)	Thermal resistance	Junction to case	—	—	0.13	°C/W
R _{th} (c-f)	Contact thermal resistance	Case to fin, conductive grease applied	—	—	0.06	°C/W
—	Insulation resistance	Measured with a 500V megohmmeter between main terminal and case	10	—	—	MΩ

PERFORMANCE CURVE


MAXIMUM FORWARD CHARACTERISTIC

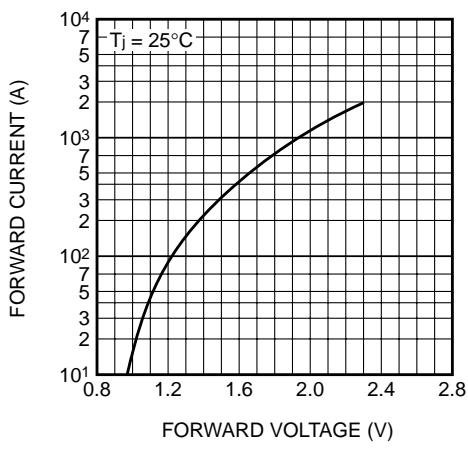


ALLOWABLE SURGE (NON-REPETITIVE) FORWARD CURRENT

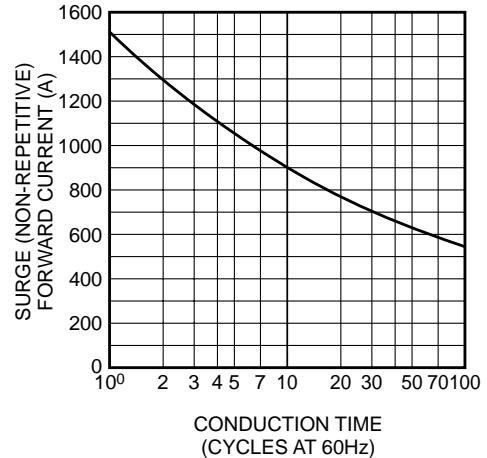

MAXIMUM TRANSIENT THERMAL IMPEDANCE (JUNCTION TO CASE)

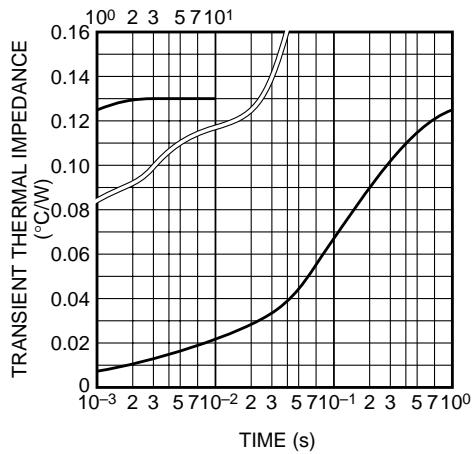

MAXIMUM POWER DISSIPATION

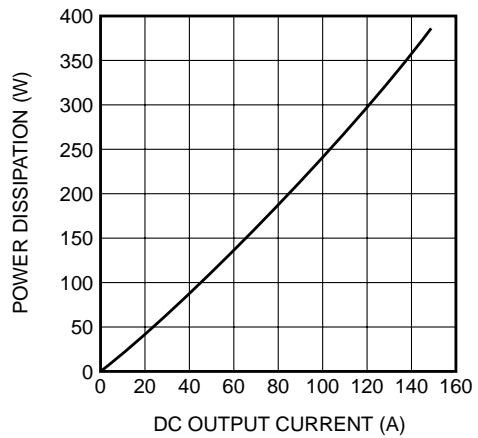

ALLOWABLE CASE TEMPERATURE VS. DC OUTPUT CURRENT

