

SPECIFICATION



Rated Current:2.0 Amp
Rated Voltage:250V AC/DC
Withstand Voltage:800V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-25°C~+85°C
Contact:Brass,Tin Plated Over Nickel
⚠ Insulator:PA66+30%G.F.(UL94V-0)
RoHS Compliant

⚠ DFE XX D - XX - H
(1) (2) (3) (4) (5)


- (1) DFE:2.0mm DF11 Series
(2) XX:No. Of Position
(3) D:DIP Straight
(4) XX:Insulator Color
Blank:Black
BE:Beige
(5) H:RoHS Compliant

Pin	A	B	C	D
04	2.00	4.80	6.00	—
06	4.00	6.80	8.00	2.00
08	6.00	8.80	10.00	4.00
10	8.00	10.80	12.00	6.00
12	10.00	12.80	14.00	8.00
14	12.00	14.80	16.00	10.00
16	14.00	16.80	18.00	12.00
18	16.00	18.80	20.00	14.00
20	18.00	20.80	22.00	16.00
22	20.00	22.80	24.00	18.00
24	22.00	24.80	26.00	20.00
26	24.00	26.80	28.00	22.00
28	26.00	28.80	30.00	24.00
30	28.00	30.80	32.00	26.00
32	30.00	32.80	34.00	28.00
34	32.00	34.80	36.00	30.00
36	34.00	36.80	38.00	32.00
38	36.00	38.80	40.00	34.00
40	38.00	40.80	42.00	36.00
42	40.00	42.80	44.00	38.00
44	42.00	44.80	46.00	40.00
46	44.00	46.80	48.00	42.00
48	46.00	48.80	50.00	44.00
50	48.00	50.80	52.00	46.00


Recommended P.C.B Layout(Top Side)
(PCB Board Tolerance:±0.05)

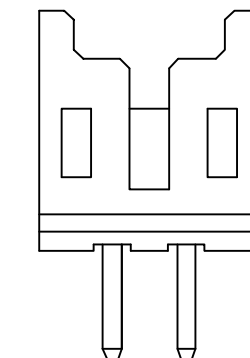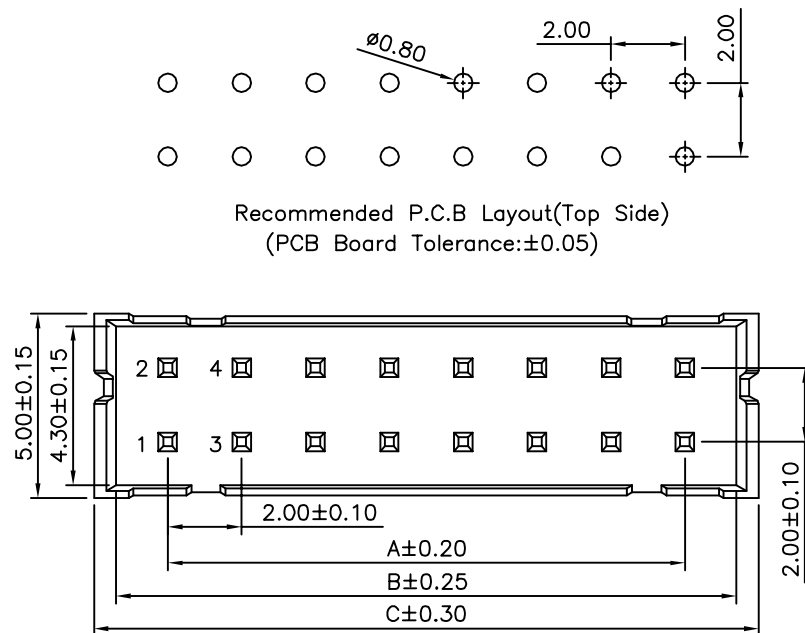

⚠ 04 Pin Configuration

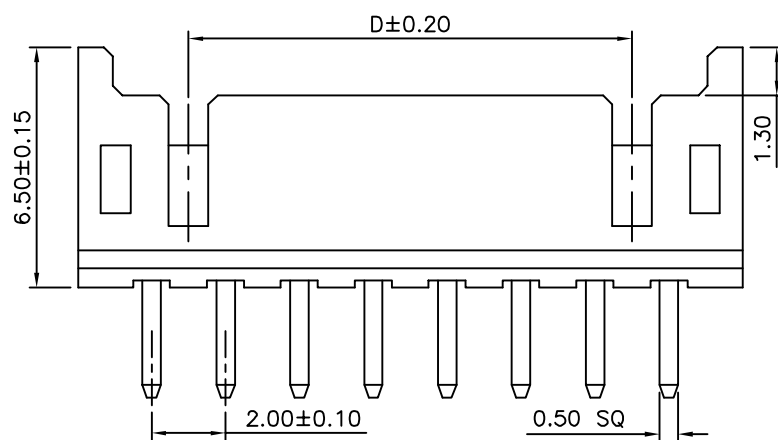

06~50 Pin Configuration ⚠

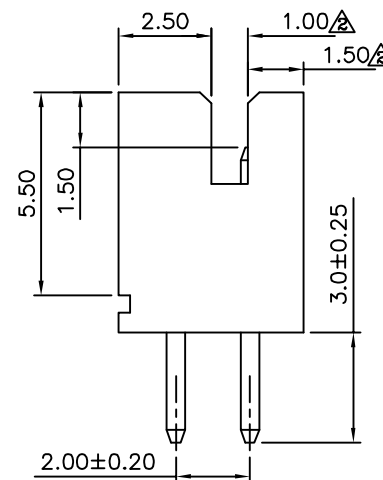

AUK

A MEMBER OF AUK GROUP

太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY

APPROVED BY

EMILY

PART No. ⚠
DFEXXD-XX-H

CHECKED BY

HZF

DRAWING No.
DFEXXD-XX-H

DRAWING BY

GAO

SCALE

NONE

REV.

A4

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.40
.XX ±0.25
.XXX ±0.15
ANG. ±3°

UNIT
mm



⚠ A4

Modify Data

HZF

03/15/2013

⚠ A3

Modify P/N:DFEXXD-BE-H
-->DFEXXD-XX-H

HZF

05/12/2010

⚠ A2

Modify Data

HZF

11/03/2009

⚠ A1

Modify Data

HZF

04/16/2009

⚠ A0

NEW RELEASE

HZF

10/08/2008

NO. REV.

REVISIONS

CHK

DATE