

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES1:

UL Standard

1.Rated voltage/current : 150V / 2A

2.Wire range : 24~20AWG

IEC Standard

1.Rated voltage/current : 130V / 6A

2.Wire range : 0.2~1.0mm²

NOTES2:

1.Dimension shall be interpreted per ASME Y14.5-2009

2.Pitch : 2.54mm, Poles : N=01~XXP

3.Stripping length : 11mm

4.Withstanding voltage : AC1300V/1Min.

5.Operating temperature : -40°C~+105°C

6.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm					
TO	Over	TO	Over	TO	Over	TO	0.1/10
6	6 TO 10	10	10 TO 24	30	30 TO 60	60	100 TO 150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30
							±2°




7.RoHS Compliance

DG141R - 2.54 - XXP - 1Y - 00A (H)


(Series No.) (Pitch) (Poles) (Single Pitch) (Color):1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

(RoHS)
00A-(Standard)

DETACHED LISTS	PART NO.:	/				宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	/				NAME: DG141R-2.54-XXP-1Y-00A(H)			
	CHKD:	/				TITLE: CUSTOMER DRAWING			
	DRFT:	/				DRAWING NO.: /		REV	DO
	THIRD ANGLE PROJECTION		MM (INCH)		DO NOT SCALE DRAWING		SHEET	1/1	

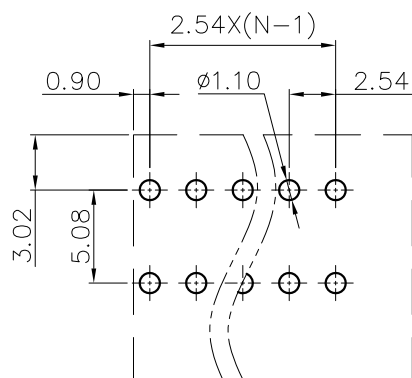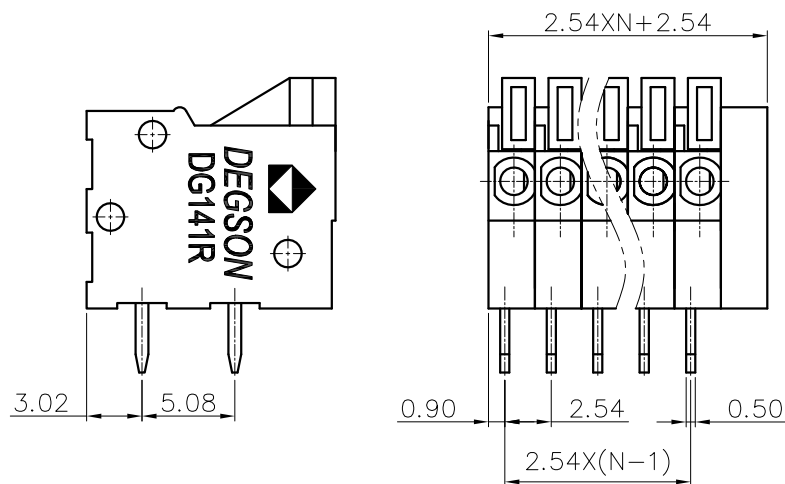

PCB LAYOUT

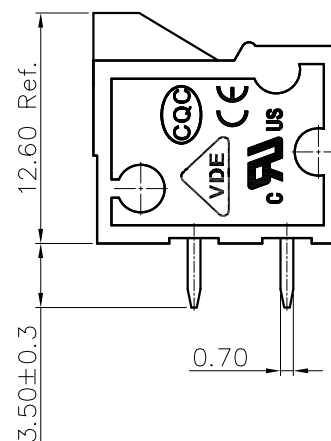

DG141R - 2.54 - XXP - 1Y - 00A (H)

(RoHS)

00A-(Standard)

(Color):1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)