
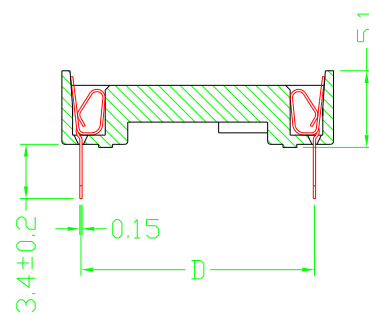
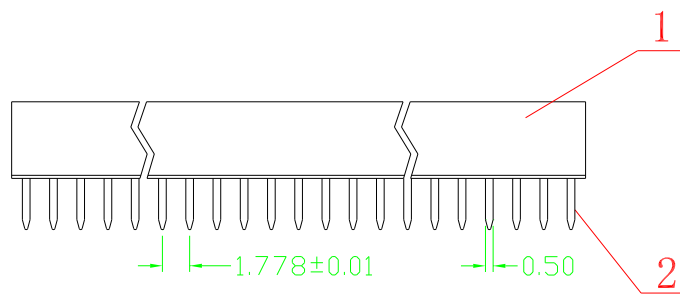


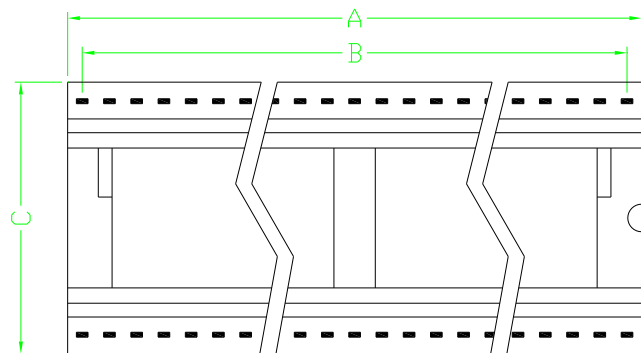

Specifications:

Contact Resistance: 30mΩ max.at DC 100 mA
 Insulator resistance: 1000MΩ min.at DC 500V
 Current Rating: 1AMP

Dielectric Withstanding

Voltage: AC 500V For 1 minute
 Operating Temperature:-55°C--+105°C
 Contact: Brass or phosphor bronze
 Housing: PBT &30% Glass Fiber(UL 94V-0)

Position	A	B	C	D
28	25.01	23.11	12.65	10.16
42	37.46	35.56	17.73	15.24
48	42.79	40.89	17.73	15.24
52	46.35	44.45	17.73	15.24
56	49.91	48.01	17.73	15.24
64	57.04	55.12	21.54	19.05