




Female Terminal

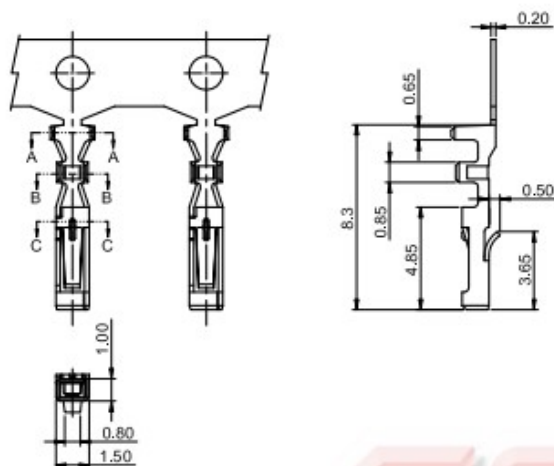

Male Terminal

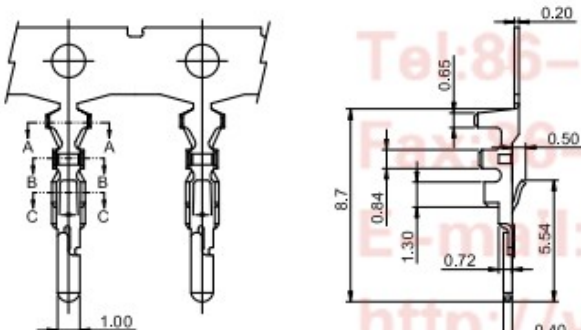


SEC:A-A




SEC:B-B




SEC:C-C



SEC:A-A



SEC:B-B



SEC:C-C

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A				

NOTES:

1. MAIN SPECIFICATIONS

- Terminal material: Copper alloy
- Rated voltage: 125V
- Rated current: 1A
- Contact resistance: $\leq 30\text{m}\Omega$
- Insulation resistance: $\geq 1000\text{M}\Omega$
- Withstanding voltage: 500V, AC 1 minute
- Temperature range: $-25 \sim +85^\circ\text{C}$
- Wire range: 24~28 AWG

2. PRODUCT NUMBER CODE:

T - DS1066- X C X 0 0

Plating type
6: Tin
8: Gold flash
Mounting type
C: Crimp
Terminal type
P: Male
S: Female

Tel: 86-574-63508787

Fax: 86-574-63510817

E-mail: sale@connfly.com

http://www.connfly.com

Add: East Industry Zone KuangYan

Town Cixi Ningbo City

P.C: 315333

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE		2.00mm Wire To Wire Connector Type	
X.	±0.60	X.	±5°	UNITS	mm				
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1066- SERIES		
.XX	±0.25	.XX	±2°	 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD					
DRAWING TYPE		CUSTOMR							
SCALE	1:1	SHEET	2 OF 2						
DRAWING NO.	DS1066- XXXXX-A								



晨翔电子有限公司

CONNFLY CONNFLY ELECTRONIC CO. LTD