

1W, Fixed input voltage, isolated & unregulated single output



FEATURES

- Continuous short-circuit protection
- Operating temperature range: -40°C to +105°C
- Compact SMD package
- Isolation voltage: 1.5K VDC
- Internal surface mounted design
- No external component required
- International standard pin-out

B_XT-1WR2 series are specially designed for applications where an isolated voltage is required in a distributed power supply system. They are suitable for

1. Where the voltage of the input power supply is stable (voltage variation: $\pm 10\%V_{in}$);
2. Where isolation between input and output is necessary (isolation voltage $\leq 1500\text{VDC}$);
3. Where the output voltage regulation and the ripple & noise of the output voltage is not strictly required;
4. Typical application: digit circuit condition; normal low-frequency artificial circuit condition; relay drive circuit condition, etc.

Selection Guide

| Certification | Part No. | Input Voltage (VDC) | Output | | Efficiency (% Min./Typ.) @ Full Load | Max. Capacitive Load (μF) |
|---------------|--------------|---------------------|----------------------|--------------------------------|--------------------------------------|---------------------------|
| | | Nominal (Range) | Output Voltage (VDC) | Output Current (mA)(Max./Min.) | | |
| CE | B0303XT-1WR2 | 3.3 (2.97-3.63) | 3.3 | 303/30 | 65/69 | 220 |
| | B0305XT-1WR2 | | 5 | 200/20 | 70/74 | |
| | B0309XT-1WR2 | | 9 | 111/12 | 76/80 | |
| | B0312XT-1WR2 | | 12 | 84/9 | 76/80 | |
| | B0315XT-1WR2 | | 15 | 67/7 | 76/80 | |
| | B0324XT-1WR2 | | 24 | 42/4 | 76/80 | |
| | B0503XT-1WR2 | | 3.3 | 303/30 | 68/72 | |
| UL/CE | B0505XT-1WR2 | 5 (4.5-5.5) | 5 | 200/20 | 76/80 | 220 |
| | B0506XT-1WR2 | | 6 | 167/17 | 76/80 | |
| | B0509XT-1WR2 | | 9 | 111/12 | 76/80 | |
| | B0512XT-1WR2 | | 12 | 84/9 | 76/80 | |
| | B0515XT-1WR2 | | 15 | 67/7 | 76/80 | |
| | B0524XT-1WR2 | | 24 | 42/4 | 76/80 | |
| | B1203XT-1WR2 | | 3.3 | 303/30 | 68/72 | |
| | B1205XT-1WR2 | 12 (10.8-13.2) | 5 | 200/20 | 76/80 | 220 |
| | B1209XT-1WR2 | | 9 | 111/12 | 76/80 | |
| | B1212XT-1WR2 | | 12 | 84/9 | 76/80 | |
| | B1215XT-1WR2 | | 15 | 67/7 | 76/80 | |
| | B1224XT-1WR2 | | 24 | 42/4 | 76/80 | |
| | B1505XT-1WR2 | 15 (13.5-16.5) | 5 | 200/20 | 76/80 | 220 |
| | B1509XT-1WR2 | | 9 | 111/12 | 76/80 | |
| | B1515XT-1WR2 | | 15 | 67/7 | 76/80 | |
| CE | B2403XT-1WR2 | 24 (21.6-26.4) | 3.3 | 303/30 | 67/71 | 220 |
| | B2405XT-1WR2 | | 5 | 200/20 | 76/80 | |
| | B2409XT-1WR2 | | 9 | 111/12 | 76/80 | |
| | B2412XT-1WR2 | | 12 | 84/9 | 76/80 | |
| | B2415XT-1WR2 | | 15 | 67/7 | 76/80 | |
| | B2424XT-1WR2 | | 24 | 42/4 | 76/80 | |

Input Specifications

| Item | Operating Conditions | Min. | Typ. | Max. | Unit |
|--|----------------------|------|--------|------------------|------|
| Input Current (full load / no-load) | 3.3V input | -- | 404/25 | --/70 | mA |
| | 5V input | -- | 250/20 | --/60 | |
| | 12V input | -- | 104/15 | --/50 | |
| | 15V input | -- | 82/10 | --/35 | |
| | 24V input | -- | 52/7 | --/30 | |
| Reflected Ripple Current | | -- | 15 | -- | mA |
| Surge Voltage (1sec. max.) | 3.3V input | -0.7 | -- | 5 | VDC |
| | 5V input | -0.7 | -- | 9 | |
| | 12V input | -0.7 | -- | 18 | |
| | 15V input | -0.7 | -- | 21 | |
| | 24V input | -0.7 | -- | 30 | |
| Input Filter | | | | Filter capacitor | |
| Hot Plug | | | | Unavailable | |

Output Specifications

| Item | Operating Conditions | Min. | Typ. | Max. | Unit |
|----------------------------|---|---------------------------------------|------|---------------------------|--------|
| Output Voltage Accuracy | | See tolerance envelope graph (Fig. 1) | | | |
| Line Regulation | Input voltage change: ±1% | 3.3VDC output | -- | -- | ±1.5 |
| | | Other outputs | -- | -- | ±1.2 |
| Load Regulation | 10%-100% load | 3.3VDC output | -- | 18 | -- |
| | | 5VDC output | -- | 12 | -- |
| | | 6VDC output | -- | 10 | -- |
| | | 9VDC output | -- | 8 | -- |
| | | 12VDC output | -- | 7 | -- |
| | | 15VDC output | -- | 6 | -- |
| | | 24VDC output | -- | 5 | -- |
| Ripple & Noise* | 20MHz bandwidth | -- | 60 | 150 | mVpp-p |
| Temperature Coefficient | Full load | -- | -- | ±0.03 | %/°C |
| Short Circuit Protection** | B03xxXT-1WR2/B24xxXT-1WR2/ B0524XT-1WR2 | -- | -- | 1 | s |
| | Others | | | Continuous, self-recovery | |

Note: * Ripple and noise are measured by "parallel cable" method, please see DC-DC Converter Application Notes for specific operation;

** Supply voltage must be discontinued at the end of short circuit duration for B03xxXT-1WR2 series, B24xxXT-1WR2 series, and B0524XT-1WR2 model.

General Specifications

| Item | Operating Conditions | Min. | Typ. | Max. | Unit |
|------------------------------|--|---|------|------|---------|
| Isolation Voltage | Input-output, with the test time of 1 minute and the leak current lower than 1mA | 1500 | -- | -- | VDC |
| Isolation Resistance | Input-output, isolation voltage 500VDC | 1000 | -- | -- | MΩ |
| Isolation Capacitance | Input-output, 100KHz/0.1V | -- | 20 | -- | pF |
| Operating Temperature | Derating if the temperature ≥100°C (see Fig. 2) | -40 | -- | 105 | °C |
| Storage Temperature | | -55 | -- | 125 | |
| Casing Temperature Rise | Ta=25°C, nominal input, full load output | -- | 25 | -- | |
| Storage Humidity | Non-condensing | -- | -- | 95 | %RH |
| Reflow Soldering Temperature | | Peak temp.≤245°C, maximum duration time≤60s over 217°C. For actual application, please refer to IPC/JEDEC J-STD-020D.1. | | | |
| Switching Frequency | Full load, nominal input voltage | -- | 100 | -- | KHz |
| MTBF | MIL-HDBK-217F@25°C | 3500 | -- | -- | K hours |

Physical Specifications

| | |
|-----------------|---|
| Casing Material | Black flame-retardant heat resistant epoxy resin (UL94 V-0) |
| Dimensions | 12.70*11.20*7.25 mm |
| Weight | 1.6g(Typ.) |
| Cooling Method | Free air convection |

EMC Specifications

| | | |
|-----|-----|--|
| EMI | CE | CISPR32/EN55032 CLASS B (see Fig. 4 for recommended circuit) |
| | RE | CISPR32/EN55032 CLASS B (see Fig. 4 for recommended circuit) |
| EMS | ESD | IEC/EN61000-4-2 Contact $\pm 8\text{KV}$ perf. Criteria B |

Product Characteristic Curve

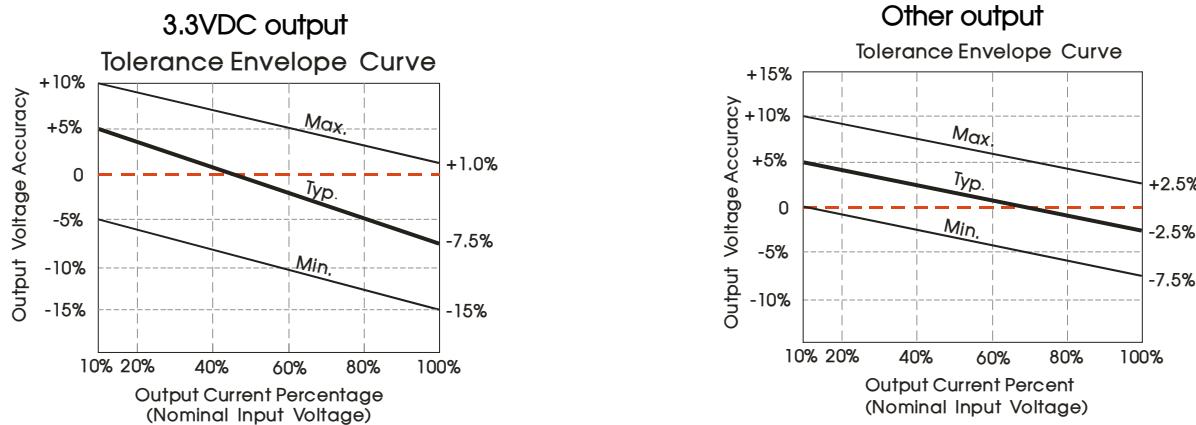


Fig. 1

Temperature Derating Curve





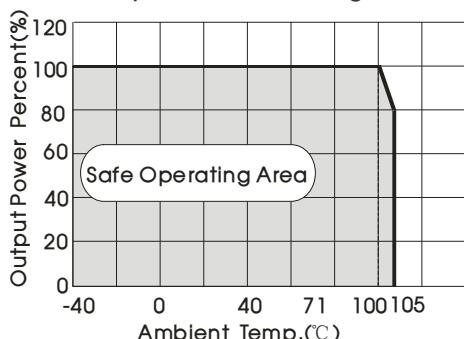


Fig. 2

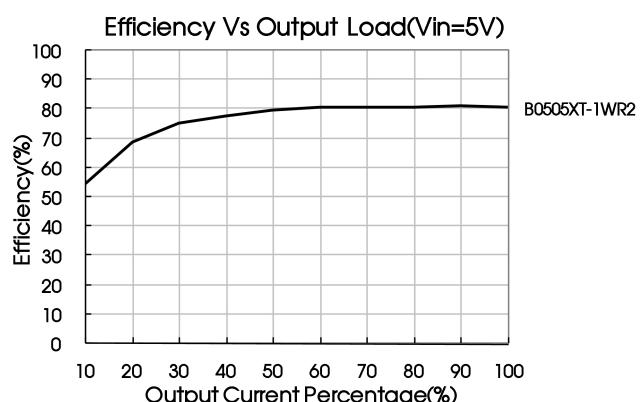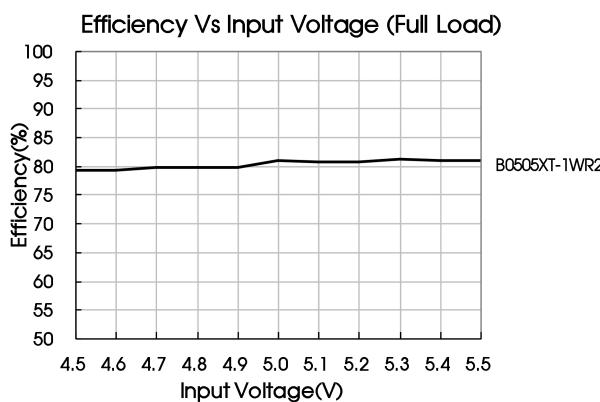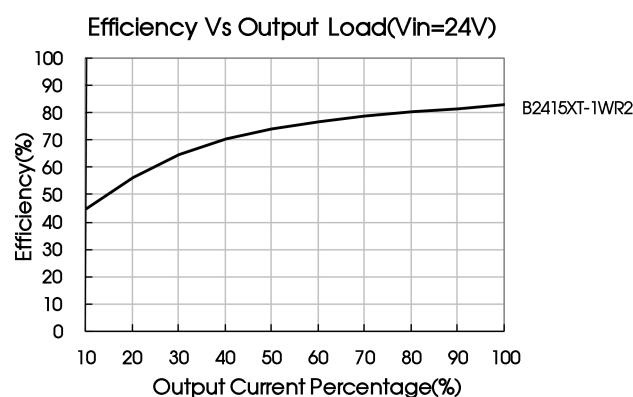


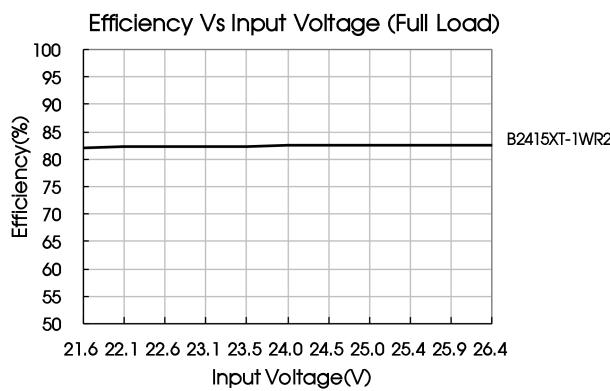

Design Reference

1. Typical application circuit


If it is required to further reduce input and output ripple, a filter capacitor may be connected to the input and output terminals, see Fig.3. Moreover, choosing a suitable filter capacitor is very important, start-up problems may be caused if the capacitance is too large. Under the condition of safe and reliable operation, the recommended capacitive load values are shown in Table 1.

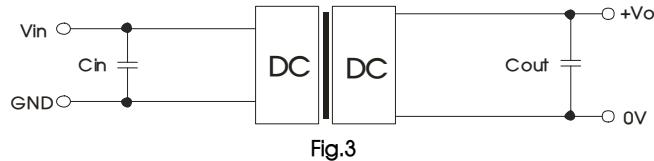

Recommended capacitive load value table (Table 1)

| Vin(VDC) | Cin(μF) | Vo (VDC) | Cout(μF) |
|----------|---------|----------|----------|
| 3.3 | 4.7 | 3.3 | 10 |
| 5 | 4.7 | 5/6 | 10 |
| 12 | 2.2 | 9 | 4.7 |
| 15 | 2.2 | 12 | 2.2 |
| 24 | 1 | 15 | 1 |
| -- | -- | 24 | 0.47 |

2. EMC solution-recommended circuit

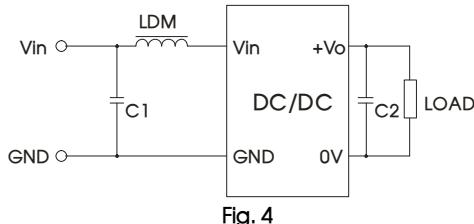


| Input voltage (VDC) | 3.3/5/12/15/24 |
|---------------------|----------------------------|
| C1 | 4.7μF /50V |
| C2 | Refer to the Cout in Fig.3 |
| LDM | 6.8μH |

3. Output load requirements

In order to ensure the converter can work reliably with high efficiency, the minimum load should not less than 10% rated load when it is used. If the needed power is indeed small, please parallel a resistor on the output side (The sum of the efficient power and resistor consumption power is not less than 10%).


4. For more information please find DC-DC converter application notes on www.mornsun-power.com

Dimensions and Recommended Layout

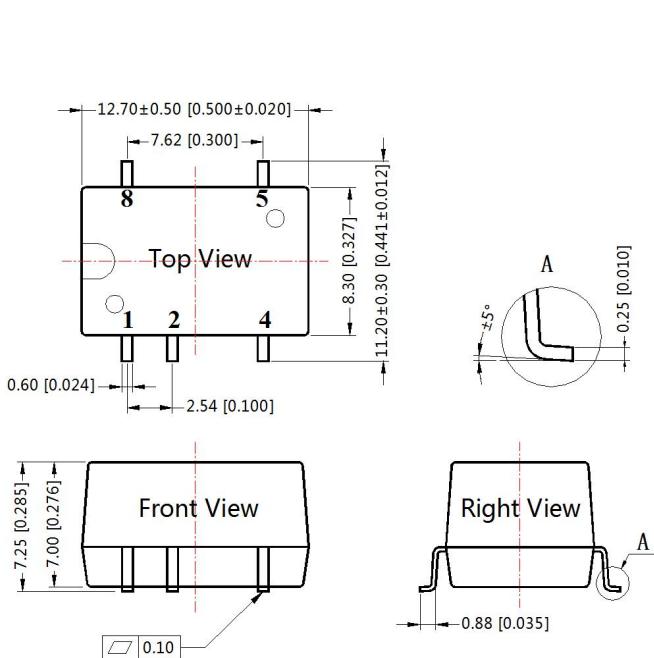

Note:
Unit: mm[inch]
Pin section tolerances: $\pm 0.10 [\pm 0.004]$
General tolerances: $\pm 0.25 [\pm 0.010]$

THIRD ANGLE PROJECTION

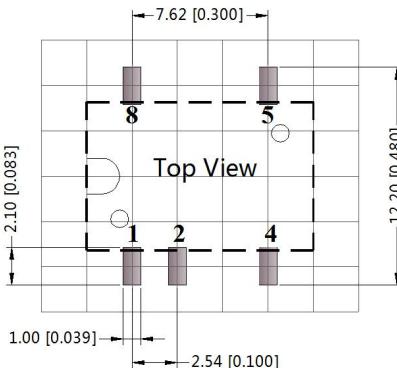

Note: Grid 2.54*2.54mm

| Pin-Out | |
|---------|----------|
| Pin | Function |
| 1 | GND |
| 2 | Vin |
| 4 | 0V |
| 5 | +Vo |
| 8 | NC |

NC: Pin to be isolated from circuitry

Notes:

1. Packing information please refer to Product Packing Information which can be downloaded from www.mornsun-power.com. Tube Packing bag number: 58210024, Roll Packing bag number: 58200054;
2. If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
3. The maximum capacitive load offered were tested at input voltage range and full load;
4. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity < 75%RH with nominal input voltage and rated output load;
5. All index testing methods in this datasheet are based on our Company's corporate standards;
6. We can provide product customization service, please contact our technicians directly for specific information;
7. Products are related to laws and regulations: see "Features" and "EMC";
8. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

MORNSUN Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Luogang District, Guangzhou, P. R. China
Tel: 86-20-38601850-8801 Fax: 86-20-38601272 E-mail: info@mornsun.cn

MORNSUN®

MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO.,LTD.