


# Вентиляторы RQA




## Система обозначений:

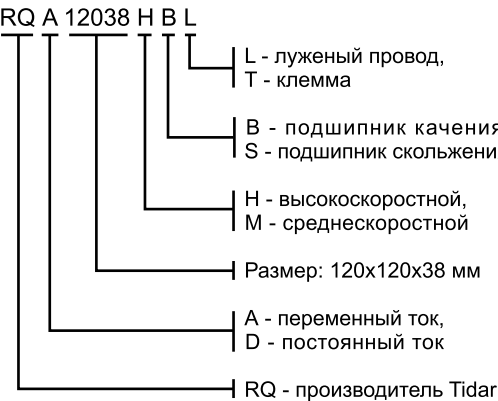


| Модел и        | Напряже ние (V) | Теку щий (A) | Мощно сть (W) | Пото к возду ха (CFM) | Оборо ты (RPM) | Уров нь шума (db) | Част ота (HZ) | чертеж | Размеры |    |       |      |
|----------------|-----------------|--------------|---------------|-----------------------|----------------|-------------------|---------------|--------|---------|----|-------|------|
|                |                 |              |               |                       |                |                   |               | №      | A       | B  | C     | D    |
| RQA8025HSL(T)  | 110/127         | 0.13/0.11    | 12/11         | 15/18                 | 2400/2450      | 28/28.5           | 50/60         | 1      | 80      | 25 | 71,5  | ---- |
| RQA8025HSL(T)  | 220/240         | 0.09/0.08    | 14/13         | 15/18                 | 2350/2400      | 27/28             | 50/60         | 1      | 80      | 25 | 71,5  | ---- |
| RQA8038HBL(T)  | 110/127         | 0.16/0.15    | 13/11         | 23/30                 | 2400/2500      | 26/27             | 50/60         | 1      | 80      | 38 | 71,5  | ---- |
| RQA8038HBL(T)  | 220/240         | 0.09/0.08    | 15/13         | 23/30                 | 2300/2600      | 25/26             | 50/60         | 1      | 80      | 38 | 71,5  | ---- |
| RQA8038HSL(T)  | 110/127         | 0.16/0.15    | 13/11         | 23/30                 | 2400/2500      | 26/27             | 50/60         | 1      | 80      | 38 | 71,5  | ---- |
| RQA8038HSL(T)  | 220/240         | 0.09/0.08    | 15/13         | 23/30                 | 2300/2600      | 25/26             | 50/60         | 1      | 80      | 38 | 71,5  | ---- |
| RQA9225HBL(T)  | 110/127         | 0.11/0.10    | 14/12         | 32/40                 | 2400/2450      | 27/26             | 50/60         | 1      | 92      | 25 | 82,5  | ---- |
| RQA9225HBL(T)  | 220/240         | 0.09/0.08    | 14/12         | 32/40                 | 2400/2450      | 27/26             | 50/60         | 1      | 92      | 25 | 82,5  | ---- |
| RQA9225HSL(T)  | 110/127         | 0.11/0.10    | 16/15         | 28/34                 | 2300/2400      | 27/26             | 50/60         | 1      | 92      | 25 | 82,5  | ---- |
| RQA9225HSL(T)  | 220/240         | 0.09/0.08    | 16/15         | 28/34                 | 2300/2400      | 25/26             | 50/60         | 1      | 92      | 25 | 82,5  | ---- |
| RQA9238HBL(T)  | 110/127         | 0.15/0.14    | 13/12         | 50/54                 | 2300/2400      | 28/27             | 50/60         | 1      | 92      | 38 | 82,5  | ---- |
| RQA9238HBL(T)  | 220/240         | 0.12/0.11    | 18/17         | 50/54                 | 2400/2500      | 29/28             | 50/60         | 1      | 92      | 38 | 82,5  | ---- |
| RQA9238HSL(T)  | 110/127         | 0.15/0.14    | 13/12         | 50/54                 | 2300/2400      | 28/27             | 50/60         | 1      | 92      | 38 | 82,5  | ---- |
| RQA9238HSL(T)  | 220/240         | 0.12/0.11    | 18/17         | 50/54                 | 2400/2500      | 29/28             | 50/60         | 1      | 92      | 38 | 82,5  | ---- |
| RQA10826HBL(T) | 110/127         | 0.22/0.21    | 16/15         | 30/35                 | 2000/2100      | 39/41             | 50/60         | 1      | 108     | 26 | 98    | ---- |
| RQA10826HBL(T) | 220/240         | 0.10/0.09    | 17/16         | 30/35                 | 2100/2100      | 40/41             | 50/60         | 1      | 108     | 26 | 98    | ---- |
| RQA10826HSL(T) | 110/127         | 0.22/0.21    | 16/15         | 30/35                 | 2000/2100      | 39/41             | 50/60         | 1      | 108     | 26 | 98    | ---- |
| RQA10826HSL(T) | 220/240         | 0.10/0.09    | 17/16         | 30/35                 | 2100/2100      | 40/41             | 50/60         | 1      | 108     | 26 | 98    | ---- |
| RQA12025HBL(T) | 110/127         | 0.15/0.14    | 16/15         | 38/42                 | 2000/2100      | 37/37.5           | 50/60         | 1      | 120     | 25 | 104,5 | ---- |
| RQA12025HBL(T) | 220/240         | 0.08/0.75    | 19/18         | 38/42                 | 2300/2450      | 39/40             | 50/60         | 1      | 120     | 25 | 104,5 | ---- |
| RQA12025HSL(T) | 110/127         | 0.15/0.14    | 16/15         | 38/42                 | 2000/2100      | 37/37.5           | 50/60         | 1      | 120     | 25 | 104,5 | ---- |
| RQA12025HSL(T) | 220/240         | 0.08/0.75    | 19/18         | 38/42                 | 2300/2450      | 39/40             | 50/60         | 1      | 120     | 25 | 104,5 | ---- |
| RQA12038HBL(T) | 110/127         | 0.24/0.23    | 25/23         | 90/100                | 2600/3100      | 41/44             | 50/60         | 1      | 120     | 38 | 104,5 | ---- |
| RQA12038HBL(T) | 220/240         | 0.14/0.13    | 26/23         | 90/100                | 2650/3180      | 42/47             | 50/60         | 1      | 120     | 38 | 104,5 | ---- |
| RQA12038HSL(T) | 110/127         | 0.24/0.23    | 25/23         | 90/100                | 2600/3100      | 41/44             | 50/60         | 1      | 120     | 38 | 104,5 | ---- |
| RQA12038HSL(T) | 220/240         | 0.14/0.13    | 26/23         | 90/100                | 2650/3180      | 42/47             | 50/60         | 1      | 120     | 38 | 104,5 | ---- |
| RQA12038HSL(T) | 380/400         | 0.07/0.06    | 14/12         | 90/100                | 2600/3100      | 40/43             | 50/60         | 1      | 120     | 38 | 104,5 | ---- |
| RQA12038HS(B)L | 110/220         | 0.14/0.23    | 26/23         | 90/100                | 2650/3180      | 40/41             | 50/60         | 1      | 120     | 38 | 104,5 | ---- |
| RQA15050HBL(T) | 110/127         | 0.47/0.46    | 37/35         | 150/170               | 2400/2800      | 47/47.5           | 50/60         | 2      | 172     | 50 | 163   | 150  |
| RQA15050HBL(T) | 220/240         | 0.23/0.22    | 35/33         | 150/170               | 2400/2800      | 45/46             | 50/60         | 2      | 172     | 50 | 163   | 150  |
| RQA15050HSL(T) | 220/240         | 0.23/0.22    | 35/33         | 150/170               | 2400/2800      | 45/46             | 50/60         | 2      | 172     | 50 | 163   | 150  |
| RQA17051HB     | 110/127         | 0.65/0.63    | 55/54         | 150                   | 2200/2700      | 65                | 50/60         | 5      | 170     | 51 | 154   | ---- |
| RQA17051HB     | 220/240         | 0.30/0.29    | 55/54         | 150                   | 2200/2700      | 65                | 50/60         | 5      | 170     | 51 | 154   | ---- |
| RQA17251HB     | 110/127         | 0.60/0.59    | 55/54         | 150                   | 2200/2700      | 65                | 50/60         | 3      | 172     | 51 | 163   | ---- |
| RQA17251HB     | 220/240         | 0.30/0.29    | 55/54         | 150                   | 2200/2700      | 65                | 50/60         | 3      | 172     | 51 | 163   | ---- |
| RQA20060HB     | 220/240         | 0.31/0.30    | 56/54         | 180/178               | 2000/2050      | 41/42             | 50/60         | 3      | 222     | 60 | 209   | ---- |
| RQA20060HB     | 110/127         | 0.38/0.36    | 58/57         | 182/180               | 2100/2200      | 42/43             | 50/60         | 3      | 222     | 60 | 209   | ---- |


# Вентиляторы RQA

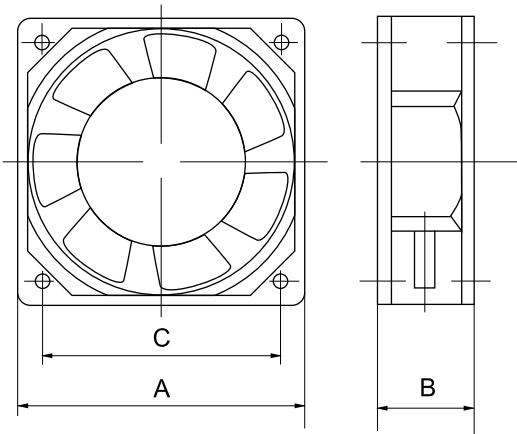


Чертеж № 1

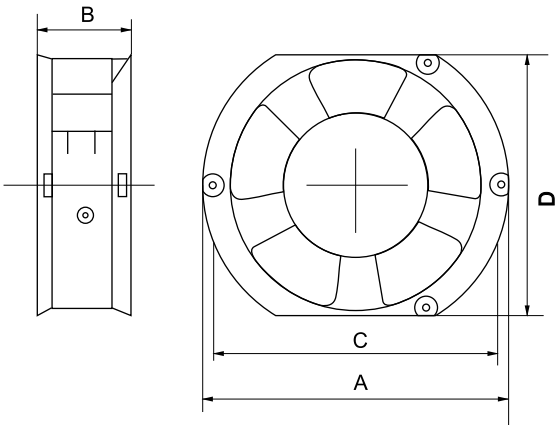

Чертеж № 2

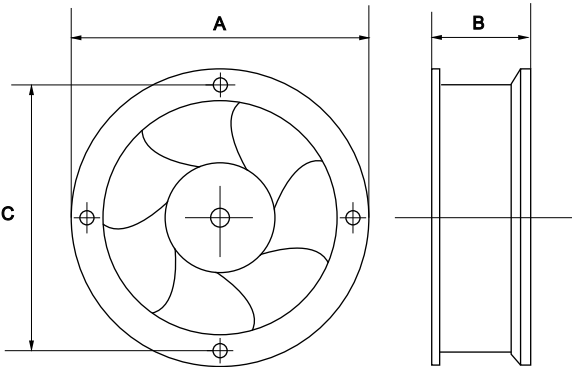

Чертеж № 3

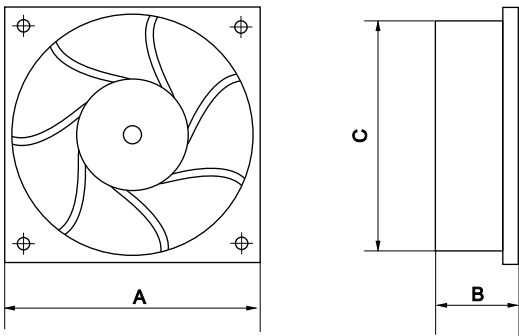

Чертеж № 5