

Common mode Noise Filters

Type: **EXC24CE EXC24CF**




Features

- Elimination of radiation noises from high-speed differential transmissions
- Strong multilayer structure, excellent reflow resistance and high mounting reliability
- Magnetic shield type with no leakage
- High-Q impedance : EXC24CF
- Small and thin (L 1.25 mm×W 1.00 mm×H 0.50 mm)
- RoHS compliant


Recommended Applications

- AV equipment (LCD-TV, DVD/Blu-ray drives), Information equipment (PCs, HDD, Printers), Communications equipment (Mobile phones, Smartphones)
- Noise suppression of high-speed differential data lines such as USB2.0 and LVDS


Explanation of Part Numbers

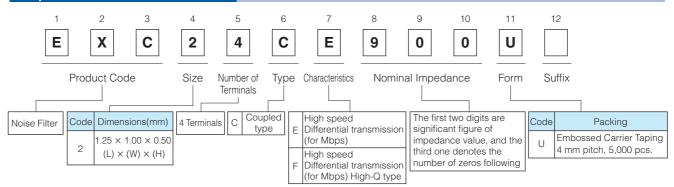


Construction

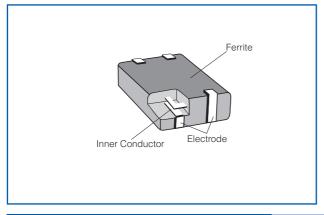

Dimensions in mm (not to scale)

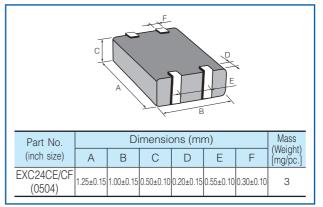

Circuit Configuration (No Polarity)

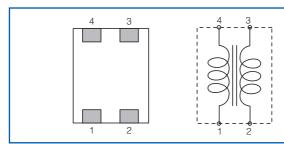


• The pin numbers shown here are for reference purposes only. Confirm the actual pin number arrangement with the exchanged specification documents.

Ratings

Part Number	Impedance (Ω) at 100 MHz		Rated Voltage	Rated Current	DC Resistance
	Common Mode	Differential Mode	(V DC)	(mA DC)	(Ω) max.
EXC24CE360UP	36 Ω±25 %	20 Ω max.	5	200	1.0
EXC24CE900U	90 Ω±25 %	15 Ω max.	5	160	1.75
EXC24CE121U	120 Ω±25 %	18 Ω max.	5	140	2.2
EXC24CE201U	200 Ω±25 %	20 Ω max.	5	130	2.7
EXC24CF900U	90 Ω±25 %	20 Ω max.	5	130	2.5

● Category Temperature Range -40 °C to +85 °C

Impedance Characteristics (Typical)

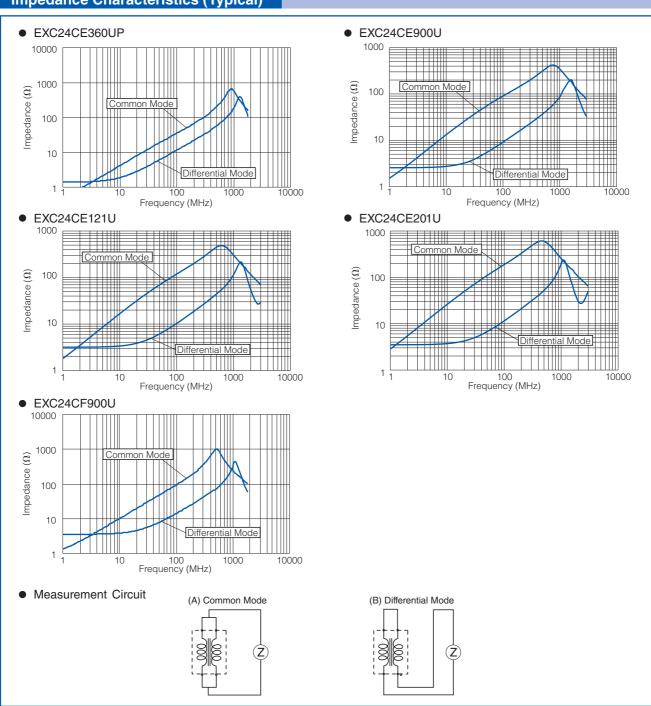

■ As for Packaging Methods, Land Pattern, Soldering Conditions and Safety Precautions, Please see Data Files

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panasonic:

EXC-24CE360UP EXC-24CF900U EXC-28CG240U EXC-28CG900U EXC-18CE650U EXC-18CE900U EXC-24CD121U EXC-24CD201U EXC-24CD600U EXC-24CE121U EXC-24CE201U EXC-24CE900U EXC-28CE121U EXC-28CE201U EXC-28CE900U EXC-18CE201U EXC-18CG430U EXC-28CH900U EXC-14CX400U EXC-24CH900U EXC-28CH500U EXC-24CH500U EXC-14CX280U EXC-28CE301U EXC-24CC271U