

# PHILIPS

## Xitanium

### LED driver



## Datasheet

# Xitanium Outdoor LED Drivers Single Current Independent Xitanium Dim 75W 0.70A 1-10V TWE I175

Xitanium LED-based light sources are an excellent solution for outdoor environment. They are long-lasting and require low maintenance. However, to get the best out of the LEDs, these light sources require highly reliable and efficient LED Drivers. The new Philips Xitanium Fixed Output and Dimmable (1-10V) LED Outdoor Drivers are specifically designed to deliver reliable performance and protection while meeting the strict performance, approbation and application requirements.

### Benefits

- Ultimate robustness and reliability secure the lowest luminaires maintenance overtime
- Long lifetime and high survival rate thanks to superior thermal management
- Consistent waterproof performance throughout the lifecycle
- Easy to design-in, based on extra EMI margin for independent use
- Compliance with IEC and UL standards, suitable for various markets
- Backed by 5 year warranty from a company you can trust

### Features

- Proven robustness and reliable electronics driver design
- Achieving highest efficiencies based on advanced technology
- Extremely long lifetime, fitting with harsh outdoor applications
- Suitable for Class I isolated luminaires
- Authorized certificates: UL / CSA / CE / CCC / ENEC / CB

### Application

- Road and street lighting
- Area and flood lighting
- Tunnel lighting
- High-bay lighting

## Electrical Input Data

Specification item	Value	Unit	Condition
Rated Input Voltage	110...277	V <sub>ac</sub>	
Nominal input voltage	230	V <sub>ac</sub>	
Input Frequency AC	47...63	Hz	Performance range
Rated Input Current	0.36	A	@ full load
Maximum Input Current	0.85	A	@ minimum input voltage AC
Rated Input Power	85	W	@ full load
Power Factor	≥ 0.95		@ full load
	≥ 0.92		@70% load
Total Harmonic Distortion	≤ 20	%	@ full load
Efficiency	≥ 90	%	@ 220V @ full load
Input voltage AC range	99...305	V <sub>ac</sub>	Performance range
Isolation input to output	Basic		

## Electrical Output Data

Specification item	Value	Unit	Condition
Regulation Method	Constant Current		
Output Voltage	40...117	V <sub>dc</sub>	+/-8% tolerance
Output Voltage Max	200	V <sub>dc</sub>	Peak voltage at open circuit
Output Current	700	mA	Performance voltage range
Output Current Tolerance	± 5	%	At max. output current
Output Current Ripple LF	≤ 5	%	Ripple = peak/average, at<1kHz
Output current ripple HF	≤ 15	%	
Output Power	28...75	W	+/-8% tolerance

## Electrical Data Control Input

Specification item	Value	Unit	Condition
Control Method	1-10	V	
Digital Interface	N/A		According 2.0 specifications
MainsControl	N/A		Can be configured via MultiOne
Time-based Integrated Control	N/A		Can be configured via MultiOne
Dimming Range	10-100	%	

## Logistical Data

Specification item	Value
Product Name	Xitanium Dim 75W 0.70A 1-10V TWE I175
Logistics Code 12NC	9290 014 02780
Pieces per Box	10

## Wiring & Connections





Specification item	Value	Unit	Condition
Input Wire Size	1.07	mm <sup>2</sup>	3-wire cable; AWG17
Output Wire Size	1.07	mm <sup>2</sup>	2-wire cable; AWG17
Input & Output Wire Length	450 ± 30	mm	Out of enclosure
Control Wire Size	1.0	mm <sup>2</sup>	2-wire cable; 300V/500V rating or higher
Control Wire Length	300 ± 30	mm	Out of enclosure and not including connector length

## Insulation

Basic Isolation: 2U + 1000 V	Input Wires	Output Wires	Chassis
Input Wires	N/A	Basic	Basic
Output Wires	Basic	N/A	Basic
Chassis	Basic	Basic	N/A

## Dimensions

Specification item	Value	Unit	Condition
Length overall	175	mm	
Width overall	68.2	mm	
Height overall	43.5	mm	
Mounting Holes Distance	162	mm	
Mounting Holes Width	34	mm	
Mounting Holes Size	4	mm	For M4 with max head diameter of 10mm
Weight	740	g	

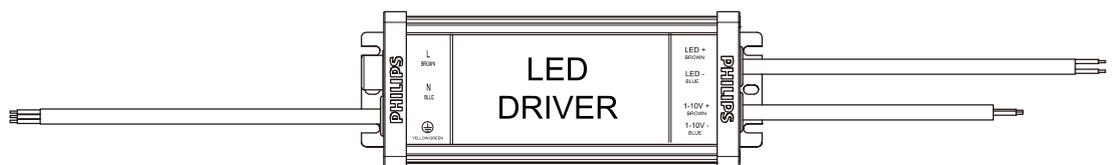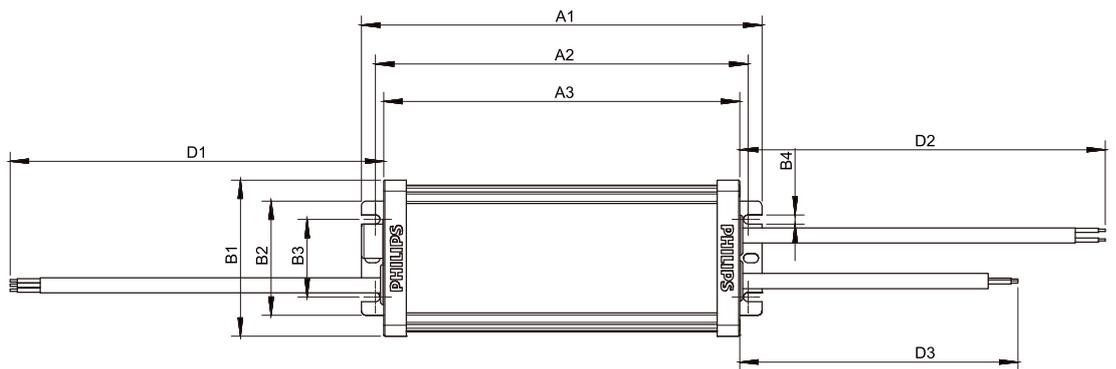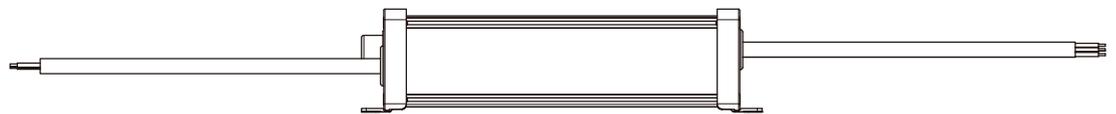

Data Sheet	
Item	Dimensions
A1	175 +0/-2.5
A2	162 +0.5/-2
A3	155 +0.5/-2
B1	68.2 +0.5/-0.5
B2	50 +0.3/-0.3
B3	34 +0.3/-0.3
B4	4 +0.1/-0.1
C	45 +0.5/-0.5
D1	450 +30/-30
D2	450 +30/-30
D3	300 +30/-30

## Operational Temperature and Humidity

Specification item	Value	Unit	Condition
Ambient Temperature	-40...+55	°C	
Ambient Humidity	10...90	%	
Tcase Maximum	80	°C	Measured at Tc-point
Tcase Life	70	°C	Measured at Tc-point
Tcase Cut-Off	90	°C	Power to LEDs is reduced

## Storage Temperature and Humidity

Specification item	Value	Unit	Condition
Ambient Temperature	-40...+80	°C	
Ambient Humidity	5...95	%	

## Lifetime

Specification item	Value	Unit	Condition
Lifetime	50,000	Hours	At Tcase Max; Survival rate = 90%

## Programmable Features

Specification item	Value	Remark	Condition
Adjustable Output Current (AOC)	N/A		
LED Module Temperature Derating (MTP)	N/A		
Constant Lumen Output (CLO)	N/A		
DC Emergency Dimming (DCEmDIM)	N/A		
Corridor Mode	N/A		
Energy Metering	N/A		
Diagnostics	N/A		

## Features


Specification item	Value	Remark	Condition
Over Temperature Protection	Yes	Dim Down	Automatic Recovery
Open Circuit Protection	Yes		Automatic Recovery
Short Circuit Protection	Yes		Automatic Recovery
Over Power Protection	Yes		
Hot Wiring	N/A		
Suitable for fixtures with Protection Class	Class I		
Input over-voltage	Yes		320Vac@48hrs 350Vac@2hrs

## Certificates and Standards

Specification item	Value
Approval Marks	UL / CSA / CE / ENEC / CB / CCC
Ingress Protection Rating	IP66/67

## Inrush current

Specification item	Value	Unit	Condition
Inrush Current $I_{peak}$	30	A	At 230Vac
Inrush Current Twidth	332	$\mu$ s	At 230Vac, measured at 50% $I_{peak}$
Drivers per MCB 16A Type B	$\leq 15$	pcs	

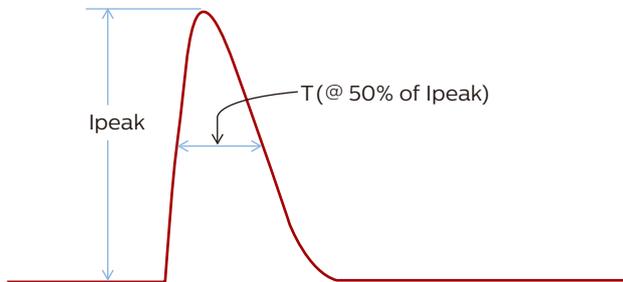

## Earth Leakage Current


Specification item	Value	Unit	Condition
Typical Leakage Current	$\leq 0.7$	mApk	Meets IEC60598; LED module not included

## Surge Capability


Specification item	Value	Unit	Condition
Mains Surge Capability Differential Mode	4	KV	Acc. IEC61000-4-5 & ANSI C62.41, 20hm
Mains Surge Capability Common Mode	4	KV	Acc. IEC61000-4-5 & ANSI C62.41, 20hm

## Graphs


### Operating window

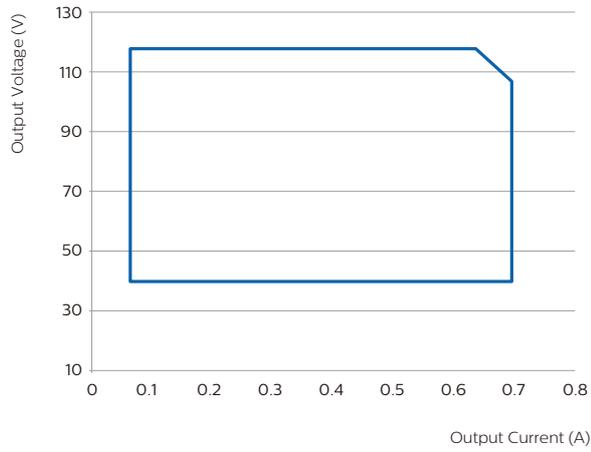


### Efficiency versus output power

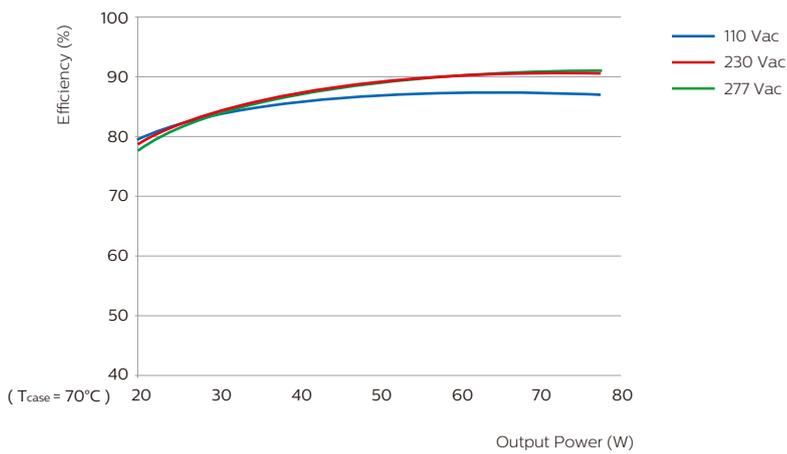


### Power factor versus output power

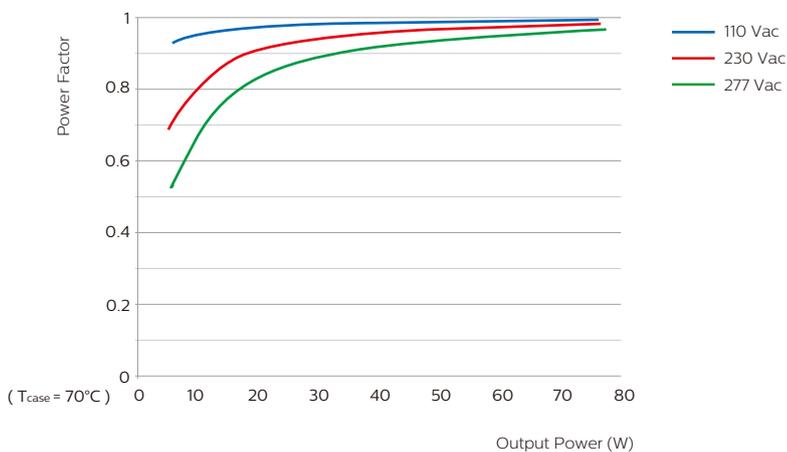

## Total Harmonic Distortion (Tcase = 70°C)

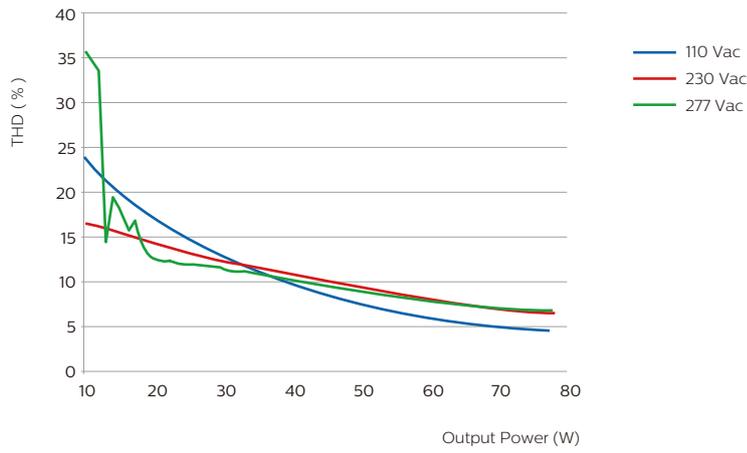


## Lifetime vs Tcase

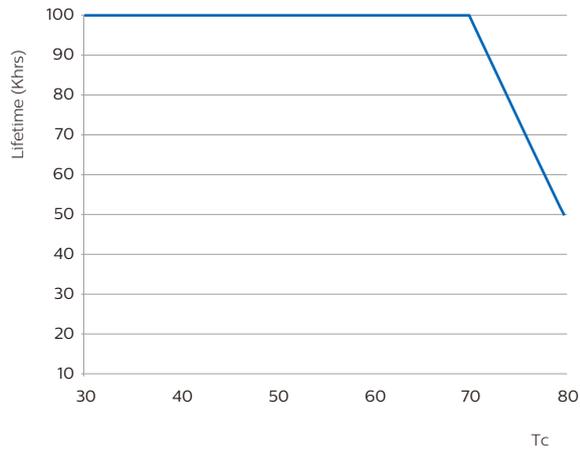

- Failure rate information based upon MTTF modeling: 90% survival at end of life @ Tcase ≤ 80°C
- Failure rate information based upon field call rate data: < 0.01% per 1K hour @ Tcase ≤ 80°C

## 1-10V dimming Curve

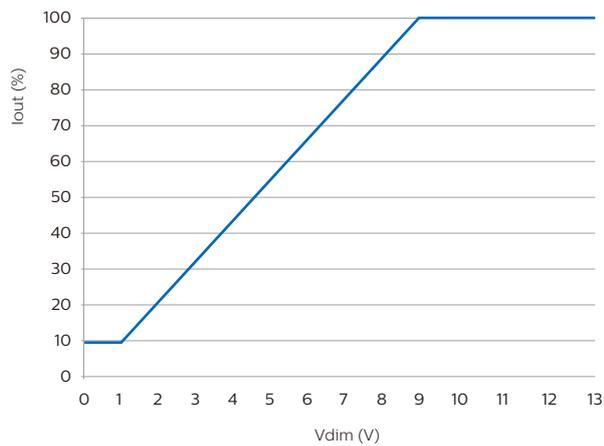



©2017 Koninklijke Philips Electronics N.V.

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights. Data subject to change.

Date of release: July, 2017

[www.philips.com](http://www.philips.com)