

# PHILIPS

## Xitanium

### LED driver



## Datasheet

### Xitanium Outdoor LED Drivers Dimmable (1-10V)

#### Xitanium Dim 250W 1.05A 1-10V 230V Q

LED-based light sources are an excellent solution for outdoor environment. They are long-lasting and require low maintenance. However, to get the best out of the LEDs, these light sources require highly reliable and efficient LED Drivers. Philips Xitanium Dimmable (1-10V) LED Outdoor Drivers are specifically designed to deliver reliable performance and protection while meeting the strict performance, approbation and application requirements.

#### Benefits

##### Reliability

- Robust design; capable of withstanding harsh outdoor conditions.
- Long lifetime and high survival rate.
- Superior Surge protection suitable for much more rigorous outdoor application.
- Backed by 5 year warranty from a company you can trust.

##### Affordable

- Component integration in advanced IC enables cost effective design.
- Proven robustness & reliability secure the lowest luminaire maintenance over time.

##### Easy to use

- Extreme compact size, fitting with varied luminaires.
- Easy to design-in based on the good thermal management and extra EMI margin

#### Features

- Proven robustness and reliable electronic driver design.
- Achieving highest efficiencies based on advance technology.
- Long lifetime; 50k hrs @ Tc max.
- Surge protection; 6kV line-line, 6kV line-earth
- Suitable for Class I isolated luminaires.
- Authorized certificate: ENEC, CB, CE and CCC.

#### Applications

- Road and street lighting
- Area and flood lighting
- Tunnel lighting
- High-bay lighting

## Electrical Input Data

Specification item	Value	Unit	Condition
Nominal Input Voltage	220...240	Vac	
Input Voltage AC	198...264	Vac	Performance range
Operation Voltage AC	85...305	Vac	Safety operation range
Nominal Input Frequency	50...60	Hz	
Input Frequency AC	47...63	Hz	Maximum permissible range
Nominal Input Current	0.9...1.2	A	220V...240V at full load
Maximum Input Current	1.35	A	At 198V
Nominal Input Power	265	W	At 230V at full load
Power Factor	≥0.95		At 230V at full load
Total Harmonic Distortion	≤10	%	At 230V at full load
Efficiency	93	%	At 230V at full load

## Electrical Output Data


Specification item	Value	Unit	Condition
Regulation Method	Constant Current		
Output Voltage	118...238	V <sub>dc</sub>	
Output Voltage Max	400	V <sub>dc</sub>	Peak voltage at open circuit
Output Current	1050	mA	Performance voltage range
Output Current Tolerance	±5	%	At max. output current
Output Current Ripple LF	5	%	Ripple = peak / average, at <1kHz
Output Power	250	W	At full load
Galvanic Isolation	Yes		Basic; 2U+1000V

## Electrical Data Control Input

Specification item	Value	Unit	Condition
Control Method	1-10	V	
Digital Interface	N/A		According 2.0 specifications
Mains Control	N/A		Can be configured via MultiOne
Time-based Integrated Control	N/A		Can be configured via MultiOne
Dimming Range	10-100	%	

## Wiring & Connections

Specification item	Value	Unit	Condition
Input Wire Size	0.75	mm <sup>2</sup>	2-wire; 600V/105°C rating
Output Wire Size	0.75	mm <sup>2</sup>	2-wire; 600V/105°C rating
Input & Output Wire Length	270 ± 30	mm	Out of enclosure
Control Wire Size	0.75	mm <sup>2</sup>	2-wire; 600V/105°C rating
Control Wire Length	270 ± 30	mm	Out of enclosure

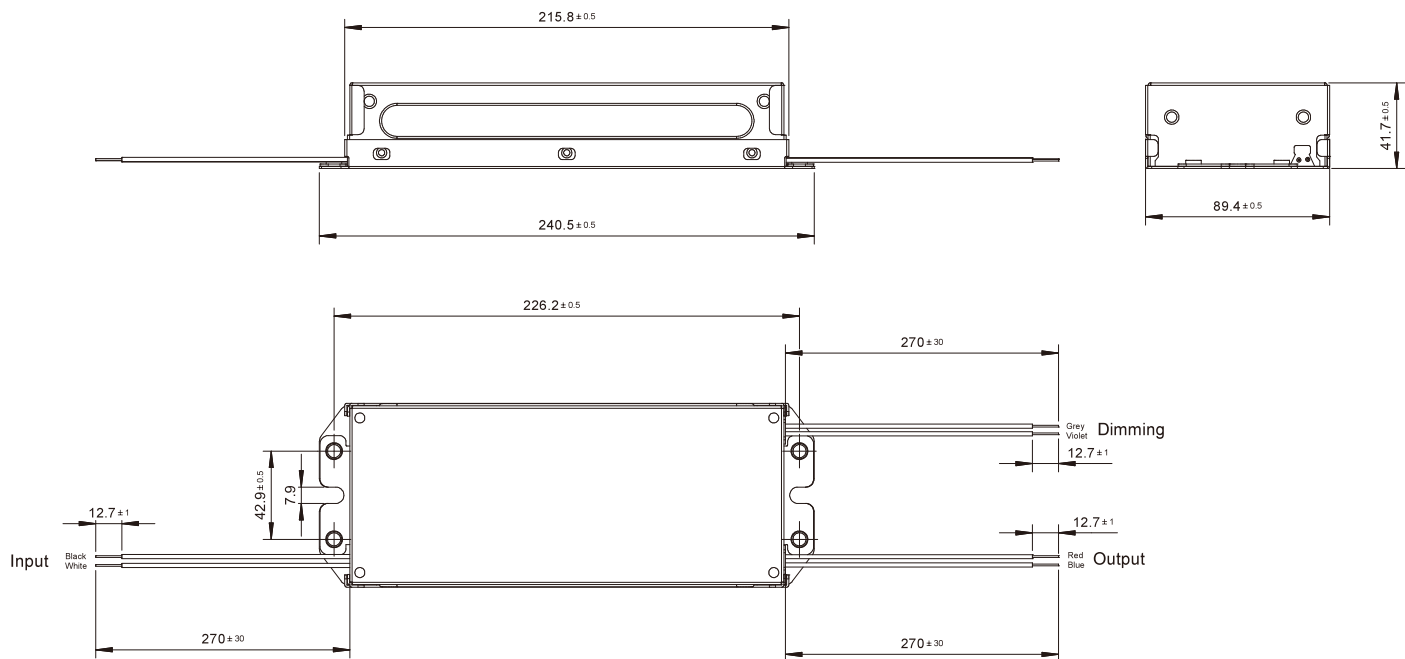

## CE Isolation

Basic Isolation: 2U+1000 V	Input Wires	Output Wires	Chassis
Input Wires	N/A	Basic	Basic
Output Wires	Basic	N/A	Basic
Chassis	Basic	Basic	N/A

## Operational Temperature and Humidity

Specification item	Value	Unit	Condition
Ambient Temperature	-40...+55	°C	
T <sub>case</sub> Maximum	90	°C	Measured at T <sub>c</sub> -point
T <sub>case</sub> Life	80	°C	Measured at T <sub>c</sub> -point
T <sub>case</sub> Cut-Off	100	°C	Power to LEDs is reduced

## Storage Temperature and Humidity

Specification item	Value	Unit	Condition
Ambient Temperature	-40...+55	°C	

## Lifetime

Specification item	Value	Unit	Condition
Lifetime	100,000	Hours	At T <sub>case</sub> Life; Survival rate = 90%

## Programmable Features

Specification item	Value	Remark	Condition
Adjustable Output Current (AOC)	N/A		See Design-In Guide
LED Module Temperature Derating (MTP)	N/A		
Constant Lumen Output (CLO)	N/A		
DC Emergency Dimming (DCEmDIM)	N/A		
Corridor Mode	N/A		
Energy Metering	N/A		
Diagnostics	N/A		

## Features


Specification item	Value	Remark	Condition
Over Temperature Protection	Yes	Dim Down	Automatic Recovery
Open Circuit Protection	Yes		Automatic Recovery
Short Circuit Protection	Yes		Automatic Recovery
Over Power Protection	Yes		
Hot Wiring	N/A		
Suitable for fixtures with Protection Class	Class I		
Input over-voltage	Yes		320Vac@48hrs 350Vac@2hrs

## Certificates and Standards

Specification item	Value
Approval Marks	CE / CCC / ENEC / CB
Ingress Protection Rating	N/A

## Inrush current

Specification item	Value	Unit	Condition
Inrush Current I <sub>peak</sub>	38.3	A	At 230Vac
Inrush Current T <sub>width</sub>	625	μs	At 230Vac, measured at 50% I <sub>peak</sub>
Drivers per MCB 16A Type B	6	pcs	

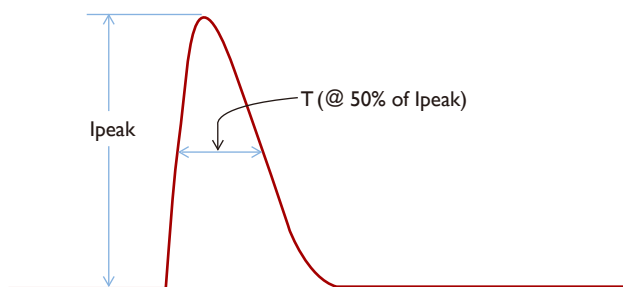

## Earth Leakage Current

Specification item	Value	Unit	Condition
Typical Leakage Current	≤0.7	mA <sub>pk</sub>	Meets IEC60598; LED module not included

## Surge Capability

Specification item	Value	Unit	Condition
Mains Surge Capability Differential Mode	6	KV	L-N, 20Ω
Mains Surge Capability Common Mode	6	KV	L/N-GND, 120Ω

## Dimensions


Specification item	Value	Unit	Condition
Length overall	240.5	mm	
Width overall	89.4	mm	
Height overall	42	mm	
Mounting Holes Distance	226.2	mm	
Mounting Holes Width	43	mm	
Mounting Holes Size	4	mm	For M4 with max head diameter of 10mm
Weight	1300	g	

## Logistical Data


Specification item	Value
Product Name	Xitanium Dim 250W 1.05A 1-10V 230V Q
Logistics Code 12NC	9290 014 04280
Pieces per Box	9

Graphs


Operating window

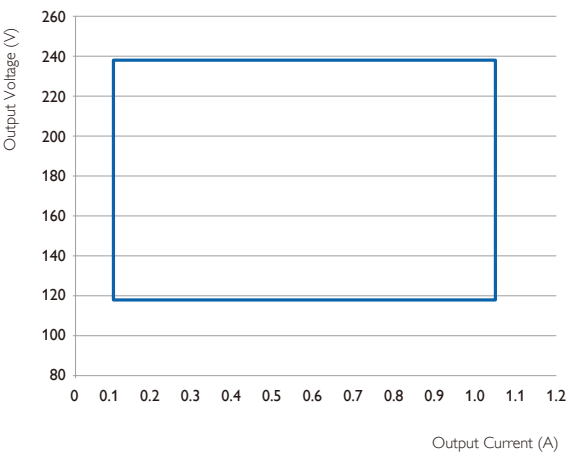


Efficiency versus output power

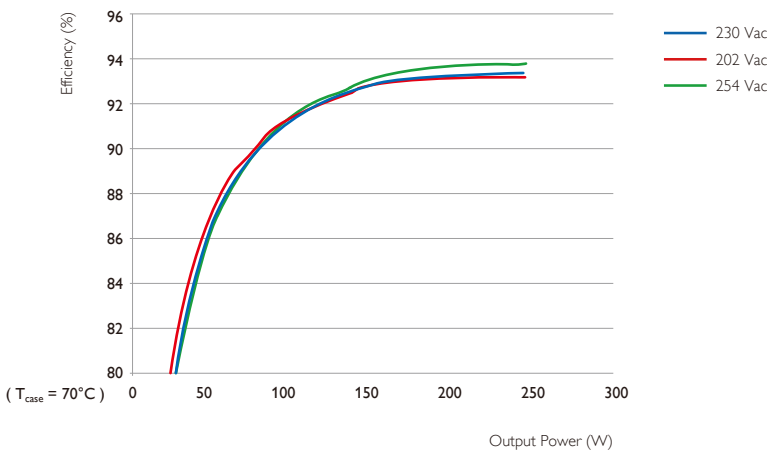


Power factor versus output power

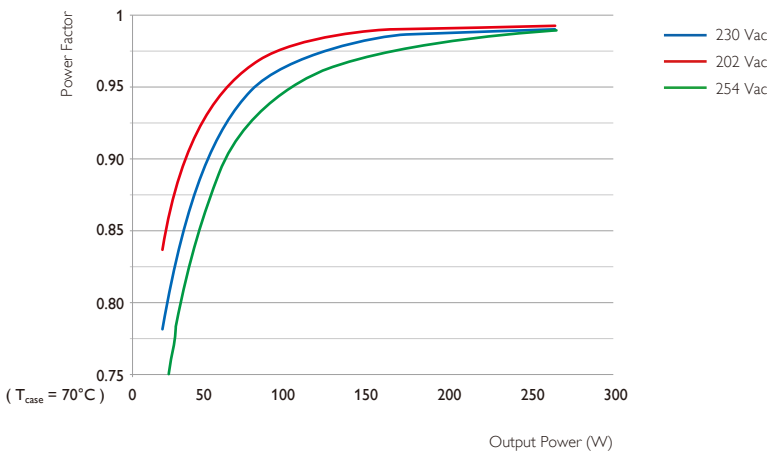

## Total Harmonic Distortion (T<sub>case</sub> = 70°C)

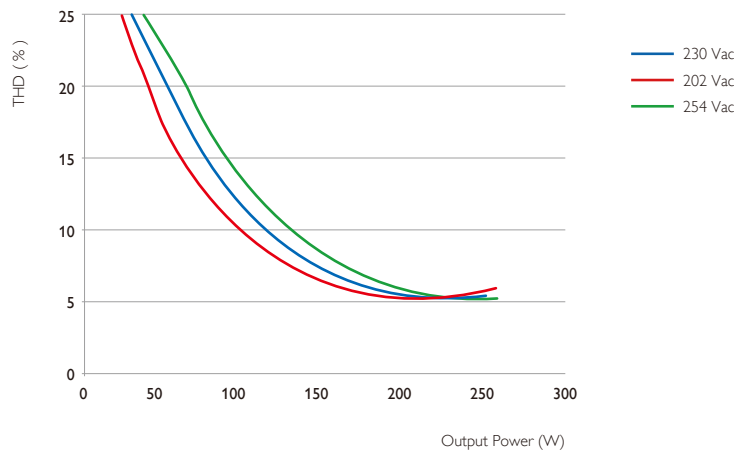


## Lifetime vs T<sub>case</sub>

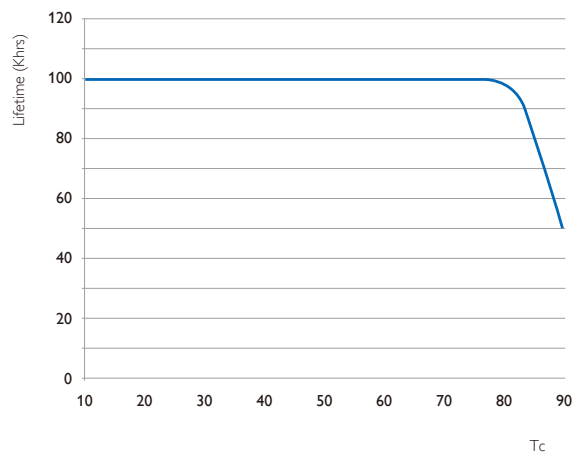


- Failure rate information based upon MTTF modeling: 90% survival at end of life @ T<sub>case</sub> ≤ 90°C
- Failure rate information based upon field call rate data: <0.01% per 1K hour @ T<sub>case</sub> ≤ 90°C

## 1-10V dimming Curve

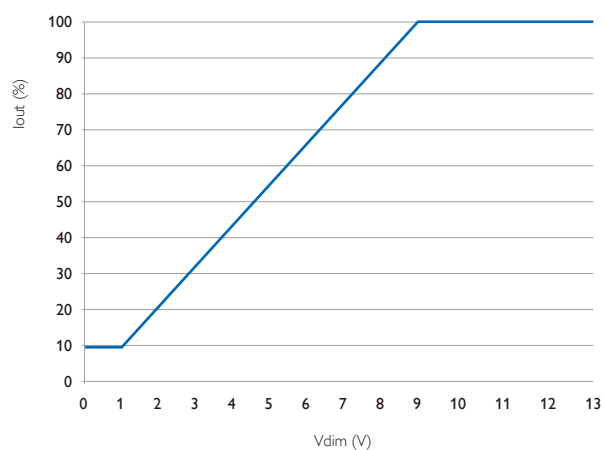

## 250W Vin vs Pout

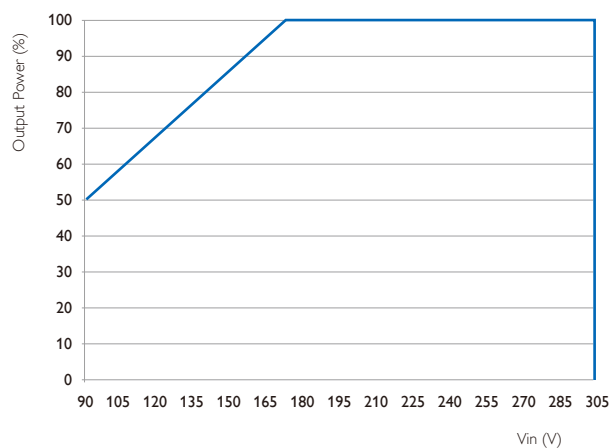

©2015 Koninklijke Philips Electronics N.V.

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights. Data subject to change.

Date of release: October 13, 2015

[www.philips.com/technology](http://www.philips.com/technology)