


HIGH VOLTAGE IGNITION COIL DRIVER
 NPN POWER DARLINGTON


- VERY RUGGED BIPOLAR TECHNOLOGY
- BUILT IN CLAMPING ZENER
- HIGH OPERATING JUNCTION TEMPERATURE
- WIDE RANGE OF PACKAGES

APPLICATIONS

- HIGH RUGGEDNESS ELECTRONIC IGNITIONS

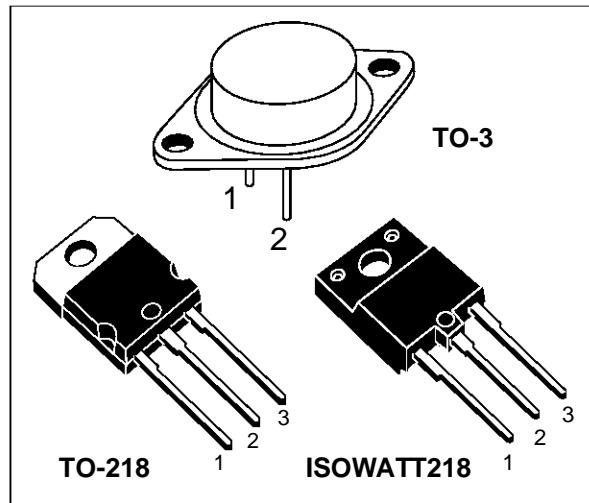

INTERNAL SCHEMATIC DIAGRAM

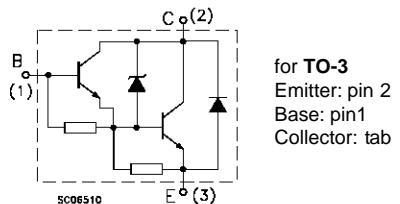
ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value			Unit
		BU941Z	BU941ZP	BUB941ZPFI	
V_{CEO}	Collector-Emitter Voltage ($I_B = 0$)	350			V
V_{EBO}	Emitter-Base Voltage ($I_C = 0$)	5			V
I_C	Collector Current	15			A
I_{CM}	Collector Peak Current	30			A
I_B	Base Current	1			A
I_{BM}	Base Peak Current	5			A
P_{tot}	Total Dissipation at $T_c = 25^\circ\text{C}$	180	155	65	W
T_{stg}	Storage Temperature	-65 to 200	-65 to 175	-65 to 175	$^\circ\text{C}$
T_j	Max. Operating Junction Temperature	200	175	175	$^\circ\text{C}$

BU941Z/BU941ZP/BU941ZPFI

THERMAL DATA


			TO-3	TO-218	ISOWATT218	
R _{thj-case}	Thermal Resistance Junction-case	Max	0.97	0.97	2.3	°C/W

ELECTRICAL CHARACTERISTICS ($T_{case} = 25^\circ\text{C}$ unless otherwise specified)


Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I _{CEO}	Collector Cut-off Current ($I_B = 0$)	$V_{CE} = 300 \text{ V}$ $V_{CE} = 300 \text{ V} \quad T_j = 125^\circ\text{C}$			100 0.5	μA mA
I _{EBO}	Emitter Cut-off Current ($I_C = 0$)	$V_{EB} = 5 \text{ V}$			20	mA
V _{CL} *	Clamping Voltage	$I_C = 100 \text{ mA}$	350		500	V
V _{CE(sat)*}	Collector-Emitter Saturation Voltage	$I_C = 8 \text{ A} \quad I_B = 100 \text{ mA}$ $I_C = 10 \text{ A} \quad I_B = 250 \text{ mA}$ $I_C = 12 \text{ A} \quad I_B = 300 \text{ mA}$			1.8 1.8 2	V
V _{BE(sat)*}	Base-Emitter Saturation Voltage	$I_C = 8 \text{ A} \quad I_B = 100 \text{ mA}$ $I_C = 10 \text{ A} \quad I_B = 250 \text{ mA}$ $I_C = 12 \text{ A} \quad I_B = 300 \text{ mA}$			2.2 2.5 2.7	V
h_{FE} *	DC Current Gain	$I_C = 5 \text{ A} \quad V_{CE} = 10 \text{ V}$	300			
V _F	Diode Forward Voltage	$I_F = 10 \text{ A}$			2.5	V
	Functional Test (see fig. 1)	$V_{CC} = 24 \text{ V} \quad L = 7 \text{ mH}$	10			A
• t _s t _f	INDUCTIVE LOAD Storage Time Fall Time (see fig. 3)	$V_{CC} = 12 \text{ V} \quad L = 7 \text{ mH} \quad V_{clamp} = 300 \text{ V}$ $I_C = 7 \text{ A} \quad I_B = 70 \text{ mA}$ $V_{BE} = 0 \quad R_{BE} = 47 \Omega$		15 0.5		μs μs

* Pulsed: Pulse duration = 300 μs , duty cycle 1.5 %


Safe Operating Area

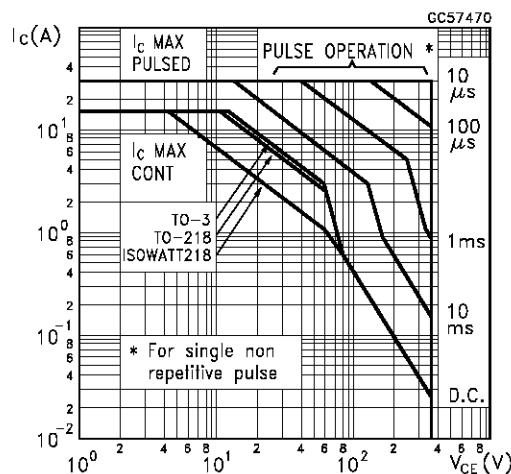


DC Current Gain

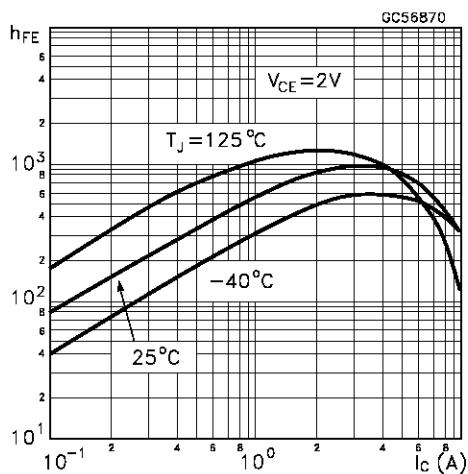


DC Current Gain

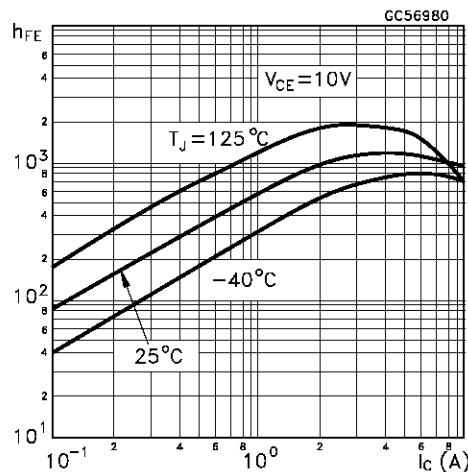


Collector-emitter Saturation Voltage

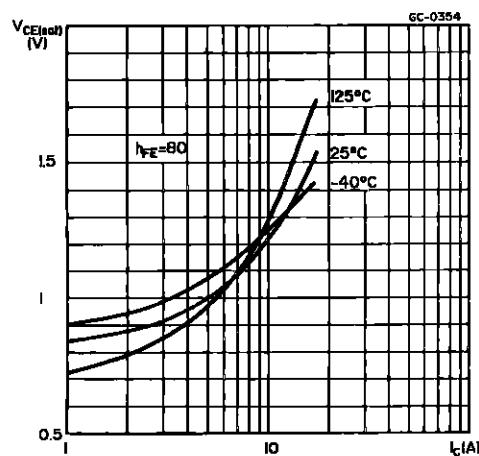


Collector-emitter Saturation Voltage

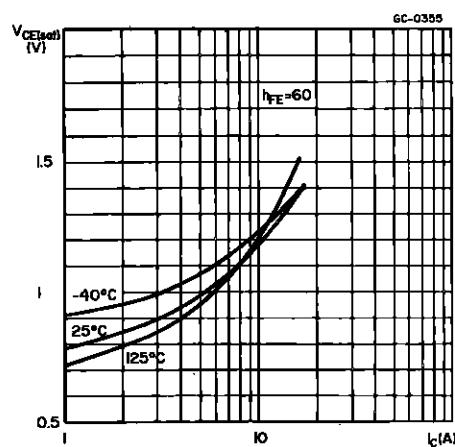


Base-emitter Saturation Voltage

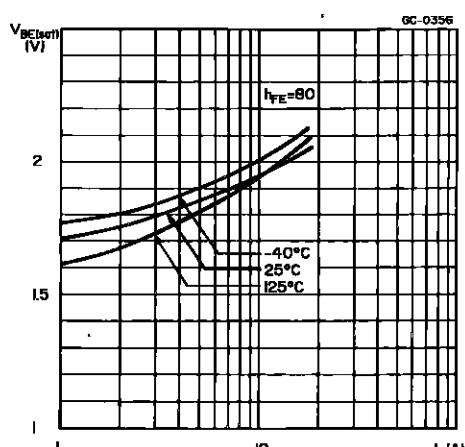

Base-emitter Saturation Voltage

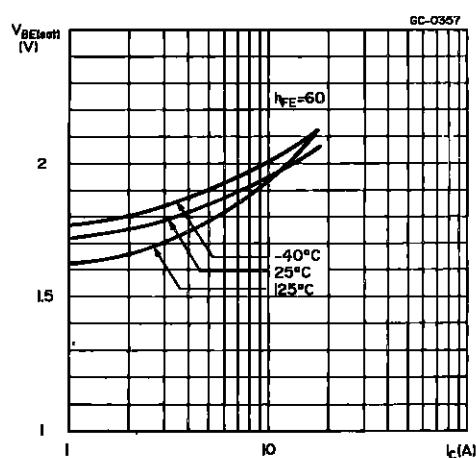

Collector-emitter Saturation Voltage

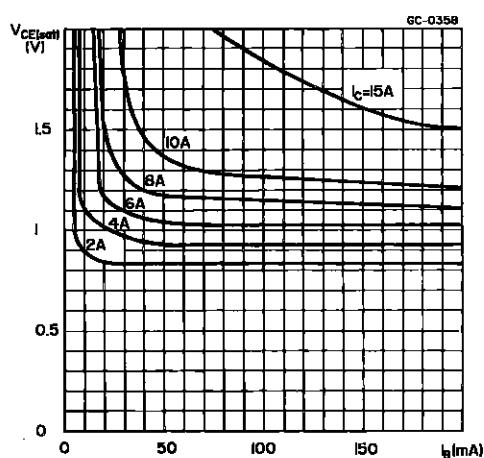

BU941Z/BU941ZP/BU941ZPFI

FIGURE 1: Functional Test Circuit

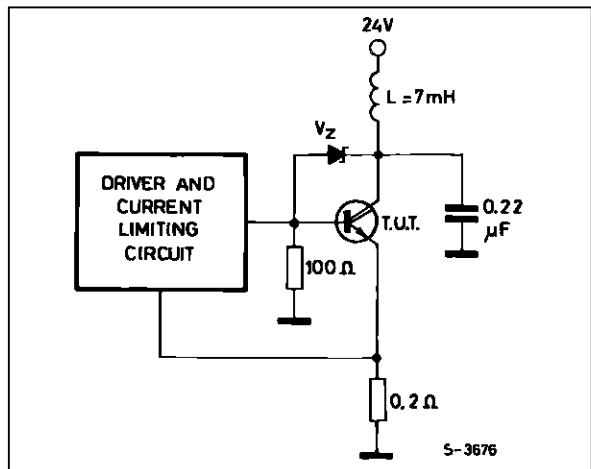


FIGURE 2: Functional Test Waveforms



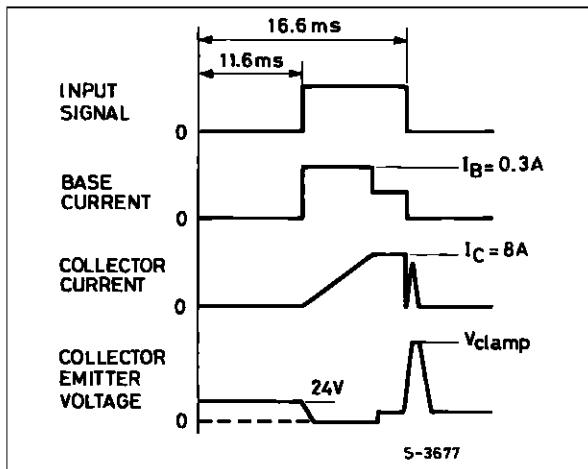


FIGURE 3: Switching Time Test Circuit

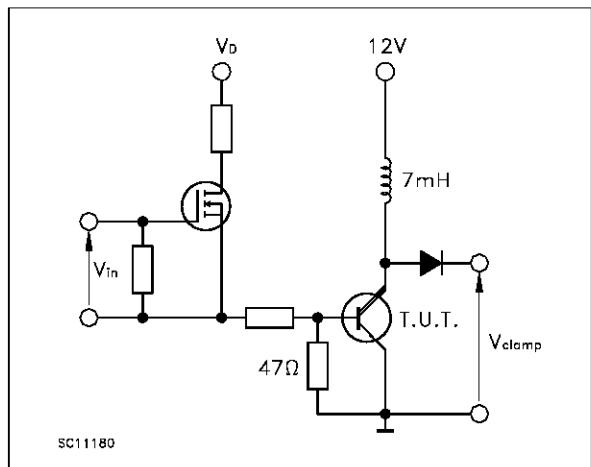


TO-3 MECHANICAL DATA

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	11.00		13.10	0.433		0.516
B	0.97		1.15	0.038		0.045
C	1.50		1.65	0.059		0.065
D	8.32		8.92	0.327		0.351
E	19.00		20.00	0.748		0.787
G	10.70		11.10	0.421		0.437
N	16.50		17.20	0.649		0.677
P	25.00		26.00	0.984		1.023
R	4.00		4.09	0.157		0.161
U	38.50		39.30	1.515		1.547
V	30.00		30.30	1.187		1.193

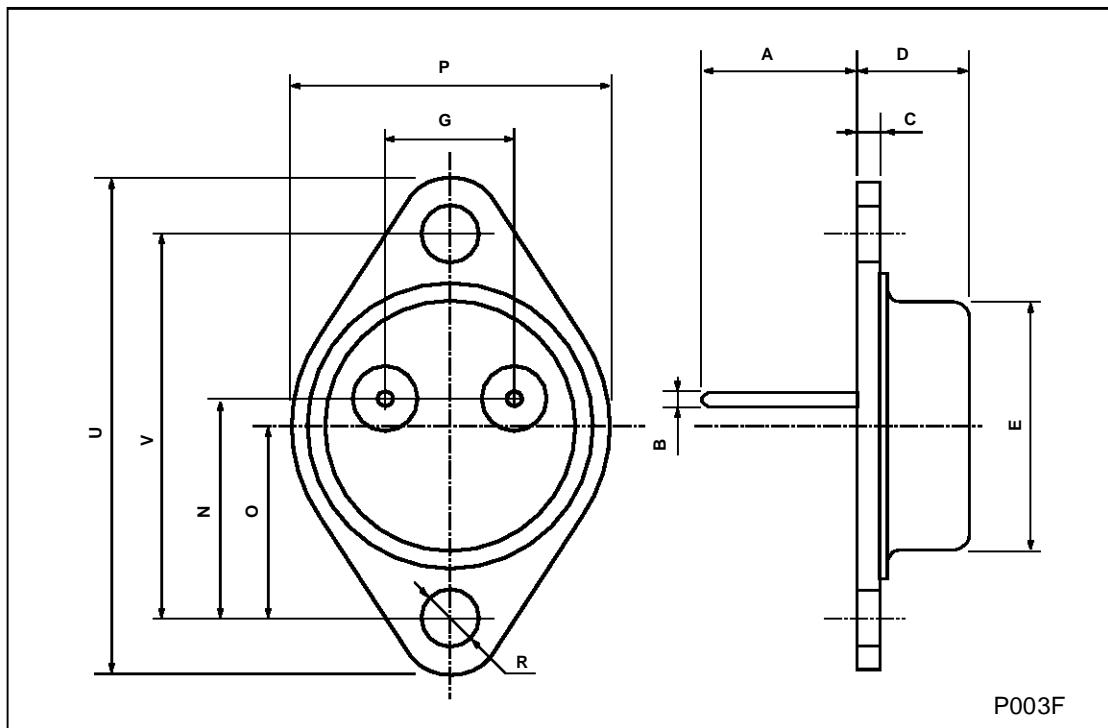


TO-218 (SOT-93) MECHANICAL DATA

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	4.7		4.9	0.185		0.193
C	1.17		1.37	0.046		0.054
D		2.5			0.098	
E	0.5		0.78	0.019		0.030
F	1.1		1.3	0.043		0.051
G	10.8		11.1	0.425		0.437
H	14.7		15.2	0.578		0.598
L2	—		16.2	—		0.637
L3		18			0.708	
L5	3.95		4.15	0.155		0.163
L6		31			1.220	
R	—		12.2	—		0.480
Ø	4		4.1	0.157		0.161

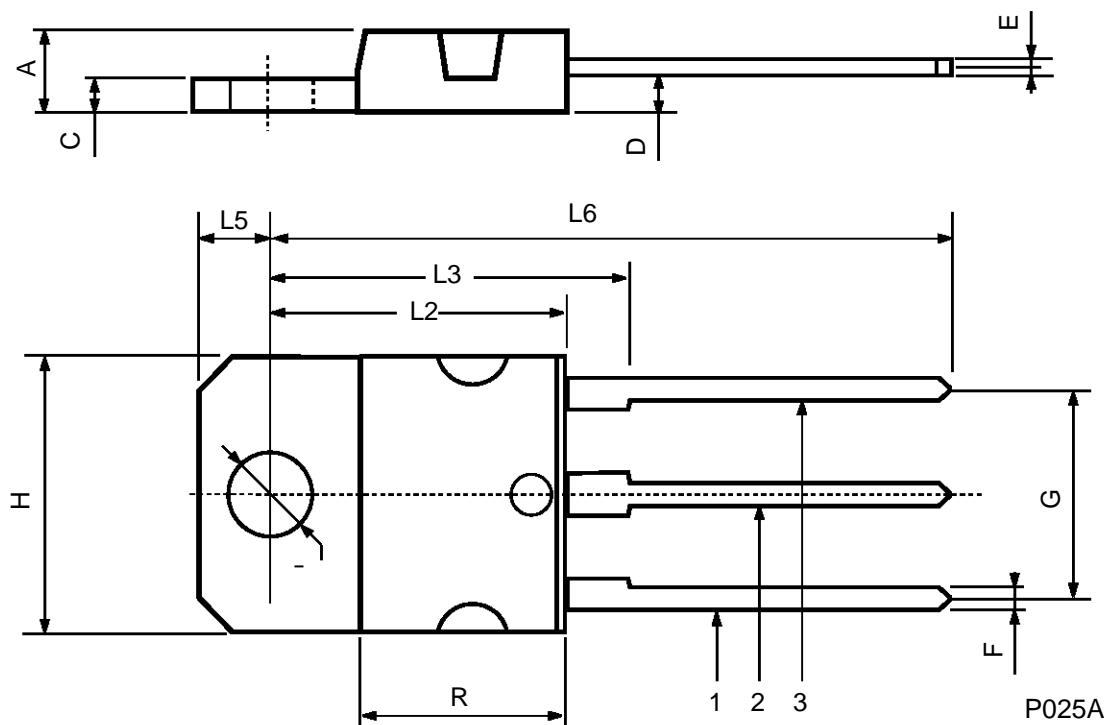

ISOWATT218 MECHANICAL DATA

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	5.35		5.65	0.210		0.222
C	3.3		3.8	0.130		0.149
D	2.9		3.1	0.114		0.122
D1	1.88		2.08	0.074		0.081
E	0.75		1	0.029		0.039
F	1.05		1.25	0.041		0.049
G	10.8		11.2	0.425		0.441
H	15.8		16.2	0.622		0.637
L1	20.8		21.2	0.818		0.834
L2	19.1		19.9	0.752		0.783
L3	22.8		23.6	0.897		0.929
L4	40.5		42.5	1.594		1.673
L5	4.85		5.25	0.190		0.206
L6	20.25		20.75	0.797		0.817
M	3.5		3.7	0.137		0.145
N	2.1		2.3	0.082		0.090
U		4.6			0.181	

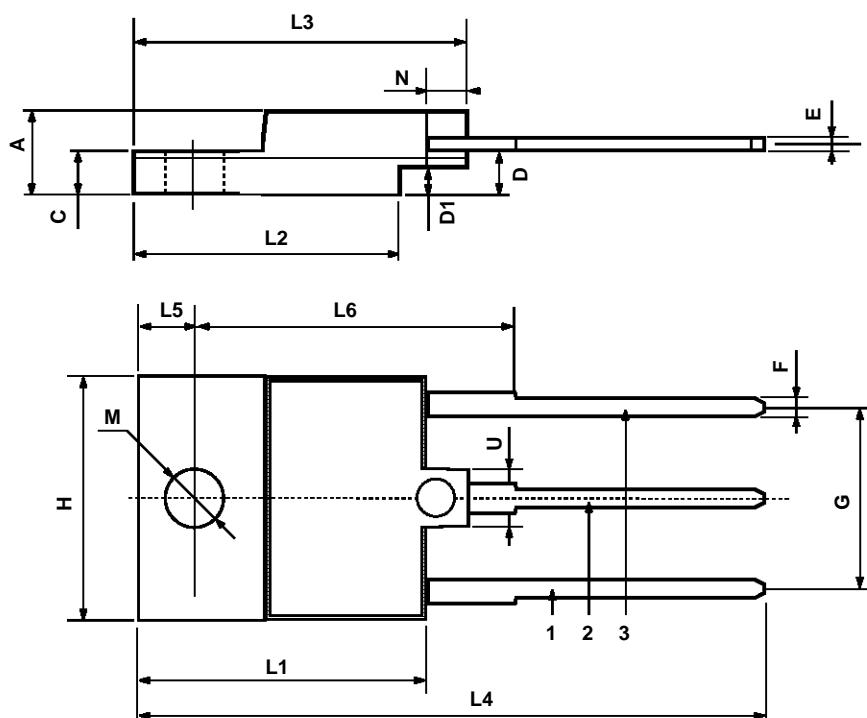

P025C