

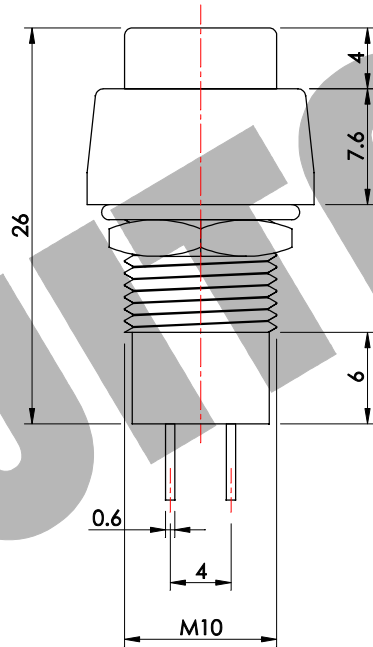


本圖面若與目錄之規格尺寸不符，以本圖面規格尺寸為主。
Below is our main specification if different from catalog.

RoHS compliant

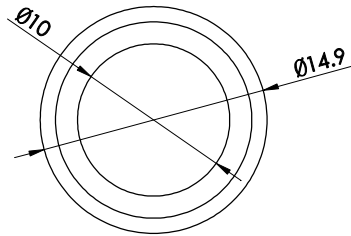

NUTS & WASHER	
☐	Separate packing
1	Fixed on S/W

RoHS compliant

SPB-10XXXX-G

MODEL NO.	FUNCTION
A	OFF - ON
B	OFF - (ON)

BUTTON COLOR	
BU	Blue
B	Black
GN	Green
R	Red
W	White
Y	Yellow
O	Orange

CONTACT & TERMINAL MATERIAL	
☐	Silver
R	Gold

SPECIFICATION

Rating: 1A 125V AC / 0.5A 250V AC.
Function: OFF-ON.
Contact resistance: 30mΩ Max.(initial)
Insulation resistance: 500V DC 100MΩ Min.
Withstand voltage: 1,000V AC for 1 minute.
Operating force: 300g Min.
Minimum load: 100mA 10V DC.(reference only)
Mechanical life: 10,000 Cycles Min.
Electrical life: 5,000 Cycles Min.
Note 1: Unwashable, don't be immersed by epoxy and organic solvent.
Note 2: Please check the actual size, do not scale the drawing page.

MATERIAL

Terminal: Copper alloy, Silver or Gold plated.



V2.3	△		
V2.2	無	改 版	2015.05.07
V2.1	無	改 版	2010.04.01
V2.0	無	新繪製	2005.10.05
版本 VER.	符號 SYMBOL	修 改 內 容 ALTERATION	更新日期 DATE

產品 PRODUCT		型號 MODEL NO.	
Pushbutton Switch		SPB-10AR-G	
製圖 DRAWN BY	核圖 CHECKED BY	主管 APPROVED BY	單位 UNIT
Peter Kuo	Chuck Young	Margaret Lee	mm
			比例 SCALE
			2 : 1
			公差 TOLERANCE
			.X=±0.3mm, .XX=±0.2mm

SWITRONIC®
INDUSTRIAL CORP.
Switches



一綺電子企業股份有限公司

總公司：110 台北市信義路四段415號13樓之3
13F-3 NO. 415, SEC. 4, HSIN YI ROAD, TAIPEI, TAIWAN
TEL：886-2-27290229(Rep.) FAX：886-2-27582086
URL：http://www.switronic.com.tw
E-MAIL：switches@ms36.hinet.net