


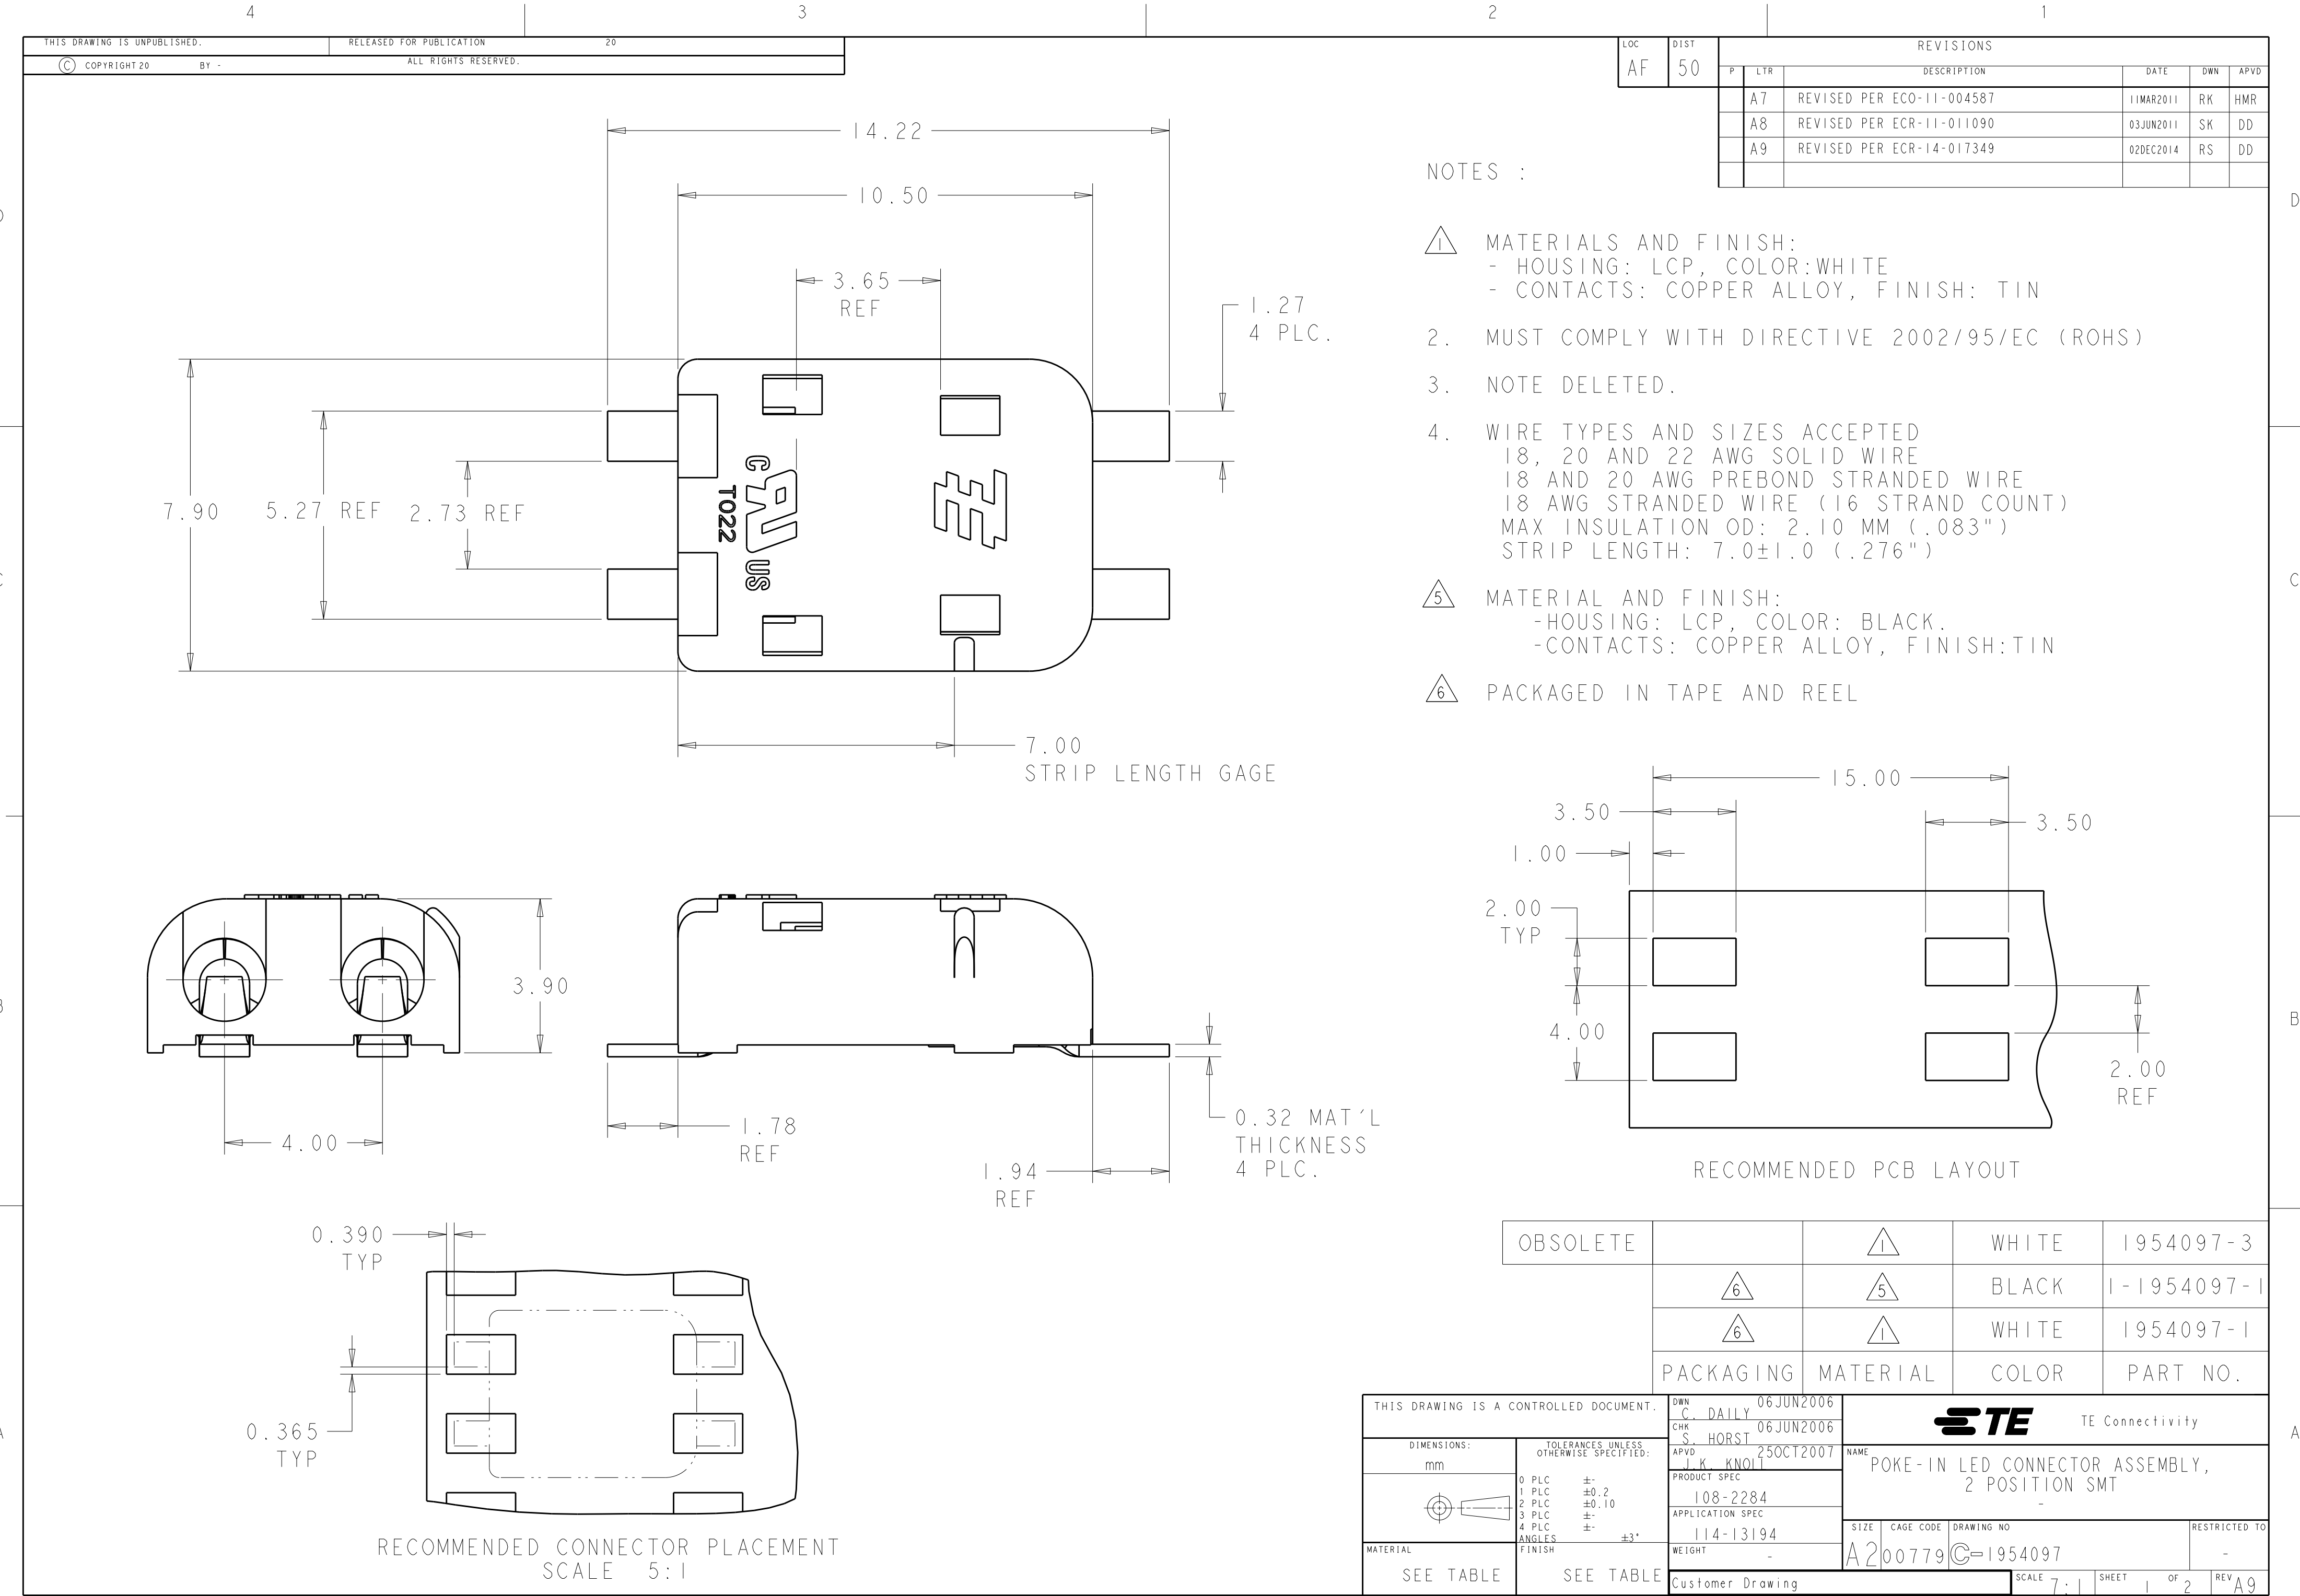

NOTES :

- 1. MATERIALS AND FINISH:
 - HOUSING: LCP, COLOR: WHITE
 - CONTACTS: COPPER ALLOY, FINISH: TIN
- 2. MUST COMPLY WITH DIRECTIVE 2002/95/EC (ROHS)
- 3. NOTE DELETED.
- 4. WIRE TYPES AND SIZES ACCEPTED
 - 18, 20 AND 22 AWG SOLID WIRE
 - 18 AND 20 AWG PREBOND STRANDED WIRE
 - 18 AWG STRANDED WIRE (16 STRAND COUNT)
 - MAX INSULATION OD: 2.10 MM (.083")
 - STRIP LENGTH: 7.0±1.0 (.276")
- 5. MATERIAL AND FINISH:
 - HOUSING: LCP, COLOR: BLACK.
 - CONTACTS: COPPER ALLOY, FINISH: TIN
- 6. PACKAGED IN TAPE AND REEL

OBSOLETE		1	WHITE	1954097-3
	6	5	BLACK	1-1954097-1
	6	1	WHITE	1954097-1
PACKAGING		MATERIAL	COLOR	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. DAILY 06JUN2006	 TE Connectivity	
DIMENSIONS: mm		CHK S. HORST 06JUN2006		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J. K. KNOLL 25OCT2007	NAME POKE-IN LED CONNECTOR ASSEMBLY, 2 POSITION SMT	
0 PLC ± 1 PLC ±0.2 2 PLC ±0.10 3 PLC ± 4 PLC ± ANGLES ±3° FINISH		PRODUCT SPEC 108-2284 APPLICATION SPEC 114-13194 WEIGHT -	SIZE A200779	
SEE TABLE		Customer Drawing	SCALE 7:1	SHEET 1 OF 2
			RESTRICTED TO - REV A9	


4

3


2

1


LOC	DIST	REVISIONS					
AF	50	P	LTR	DESCRIPTION	DATE	DWN	APVD
			-	SEE SHEET 1	-	-	-

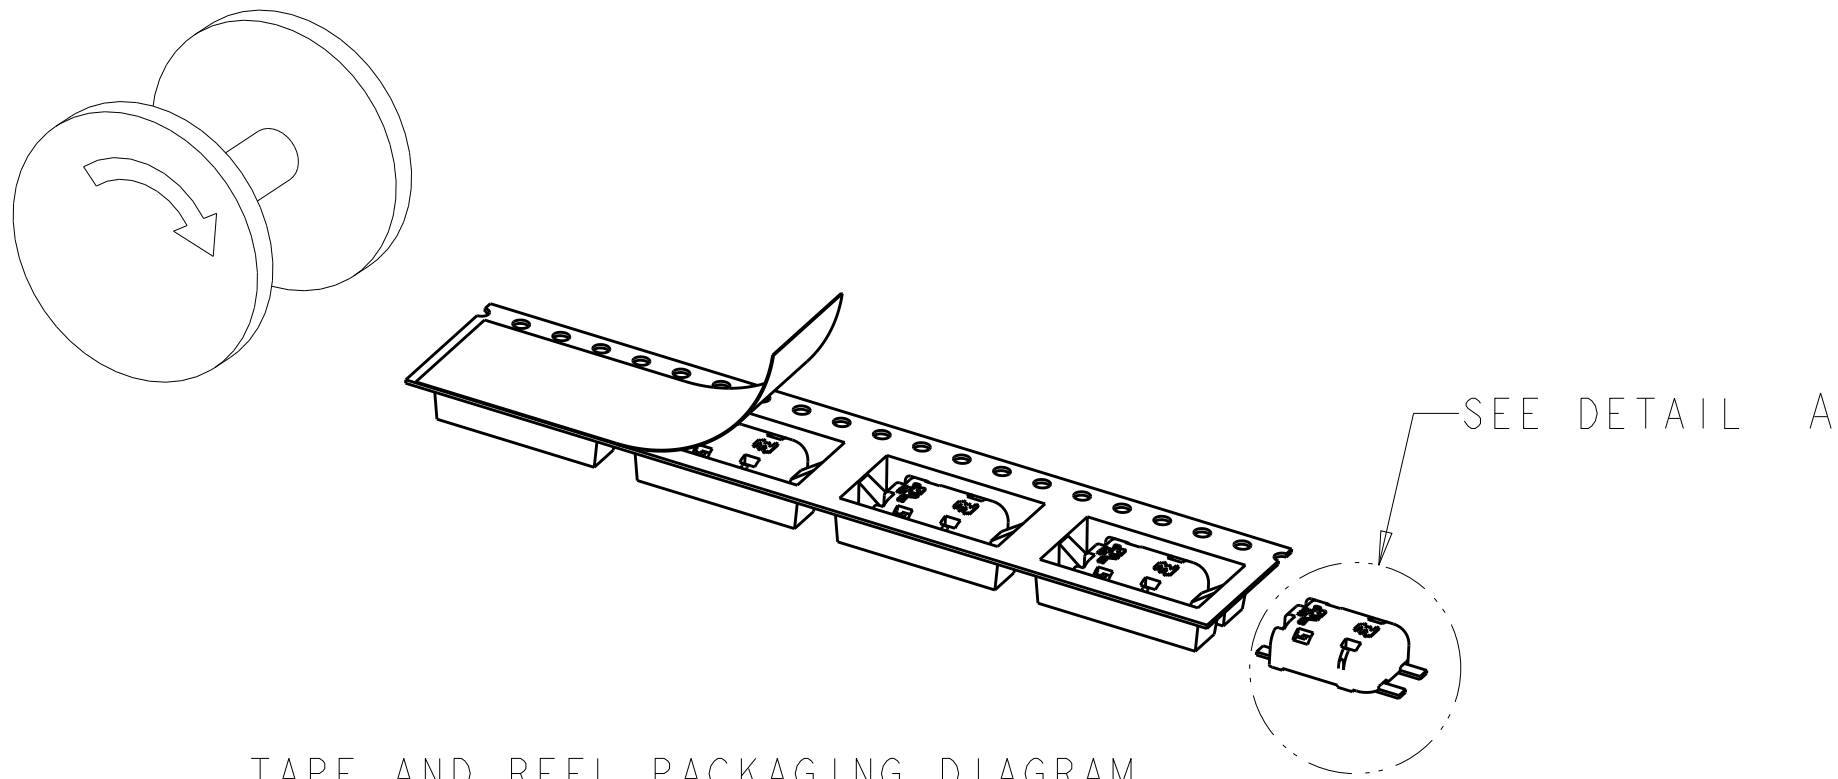

TAPE AND REEL PACKAGING DIAGRAM
FOR 1954097-1 & 1-1954097-1

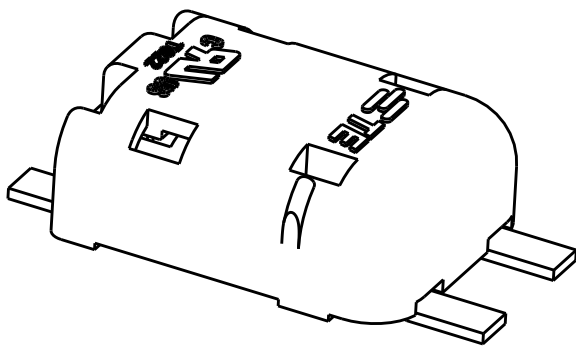

DETAIL A
SCALE 5:1

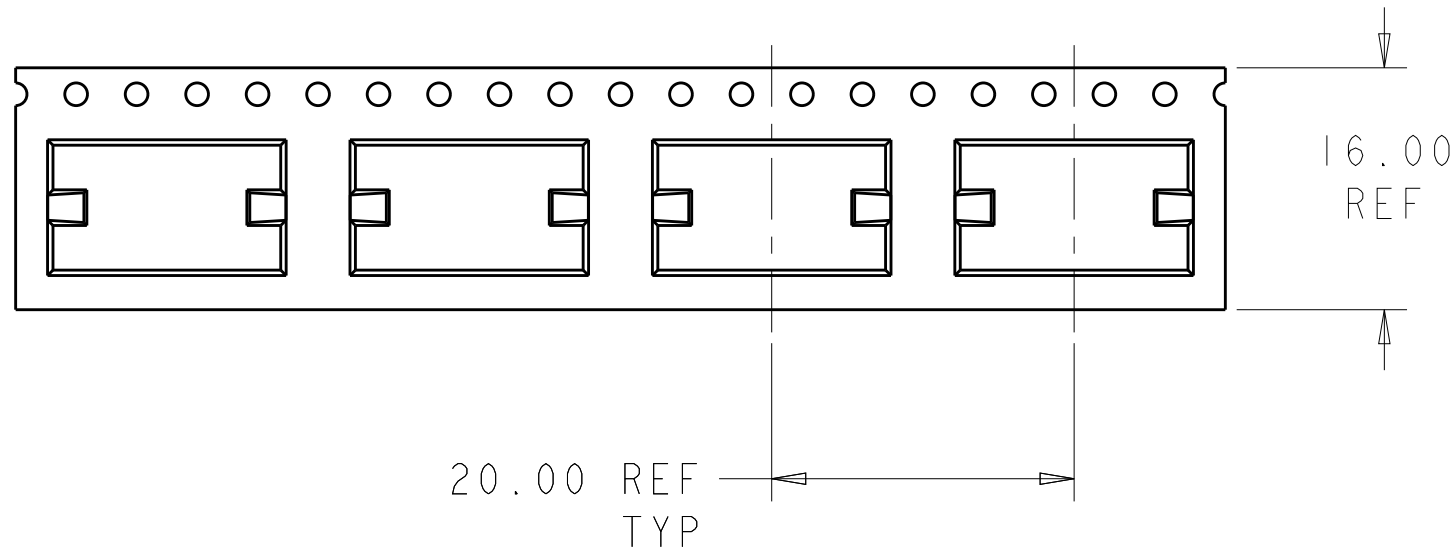

SCALE 2:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. DAILY 06JUN2006	 TE Connectivity			
DIMENSIONS: mm		CHK S. HORST 06JUN2006				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J. K. KNOLL 25OCT2007	NAME POKE-IN LED CONNECTOR ASSEMBLY, 2 POSITION SMT			
0 PLC ± 1 PLC ±0.2 2 PLC ±0.10 3 PLC ± 4 PLC ± ANGLES ±3° FINISH		PRODUCT SPEC 108-2284 APPLICATION SPEC 114-13194 WEIGHT -	SIZE A200779			
SEE TABLE		SEE TABLE	DRAWING NO C-1954097			
		Customer Drawing	RESTRICTED TO -			
		SCALE 7:1	SHEET 2 OF 2			
			REV A9			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1954097-1](#)