

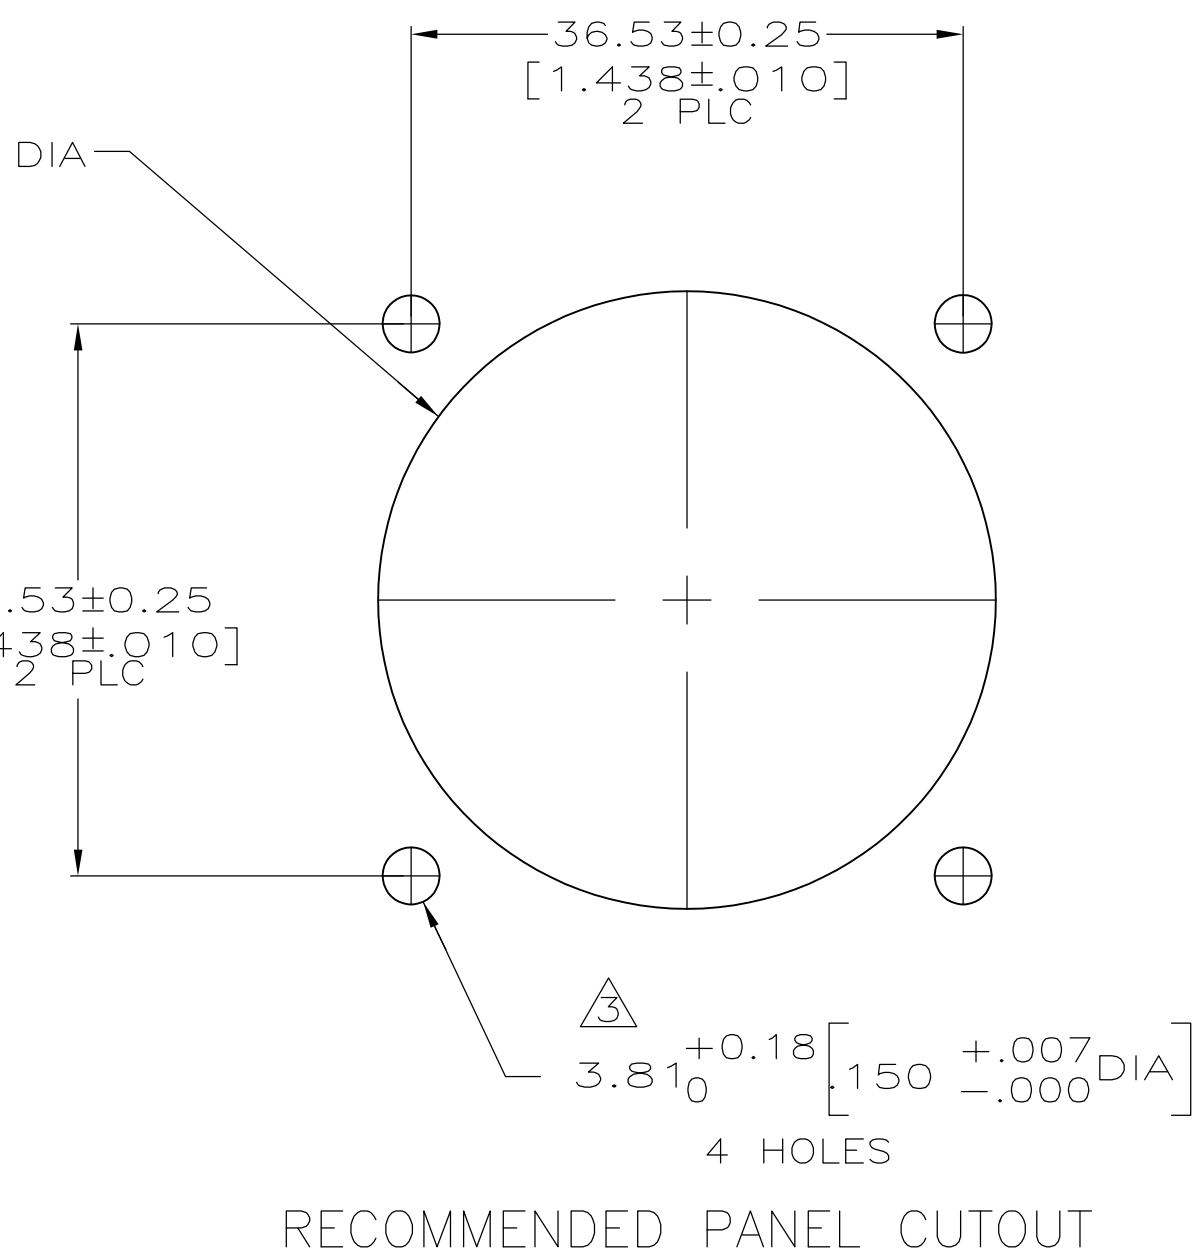
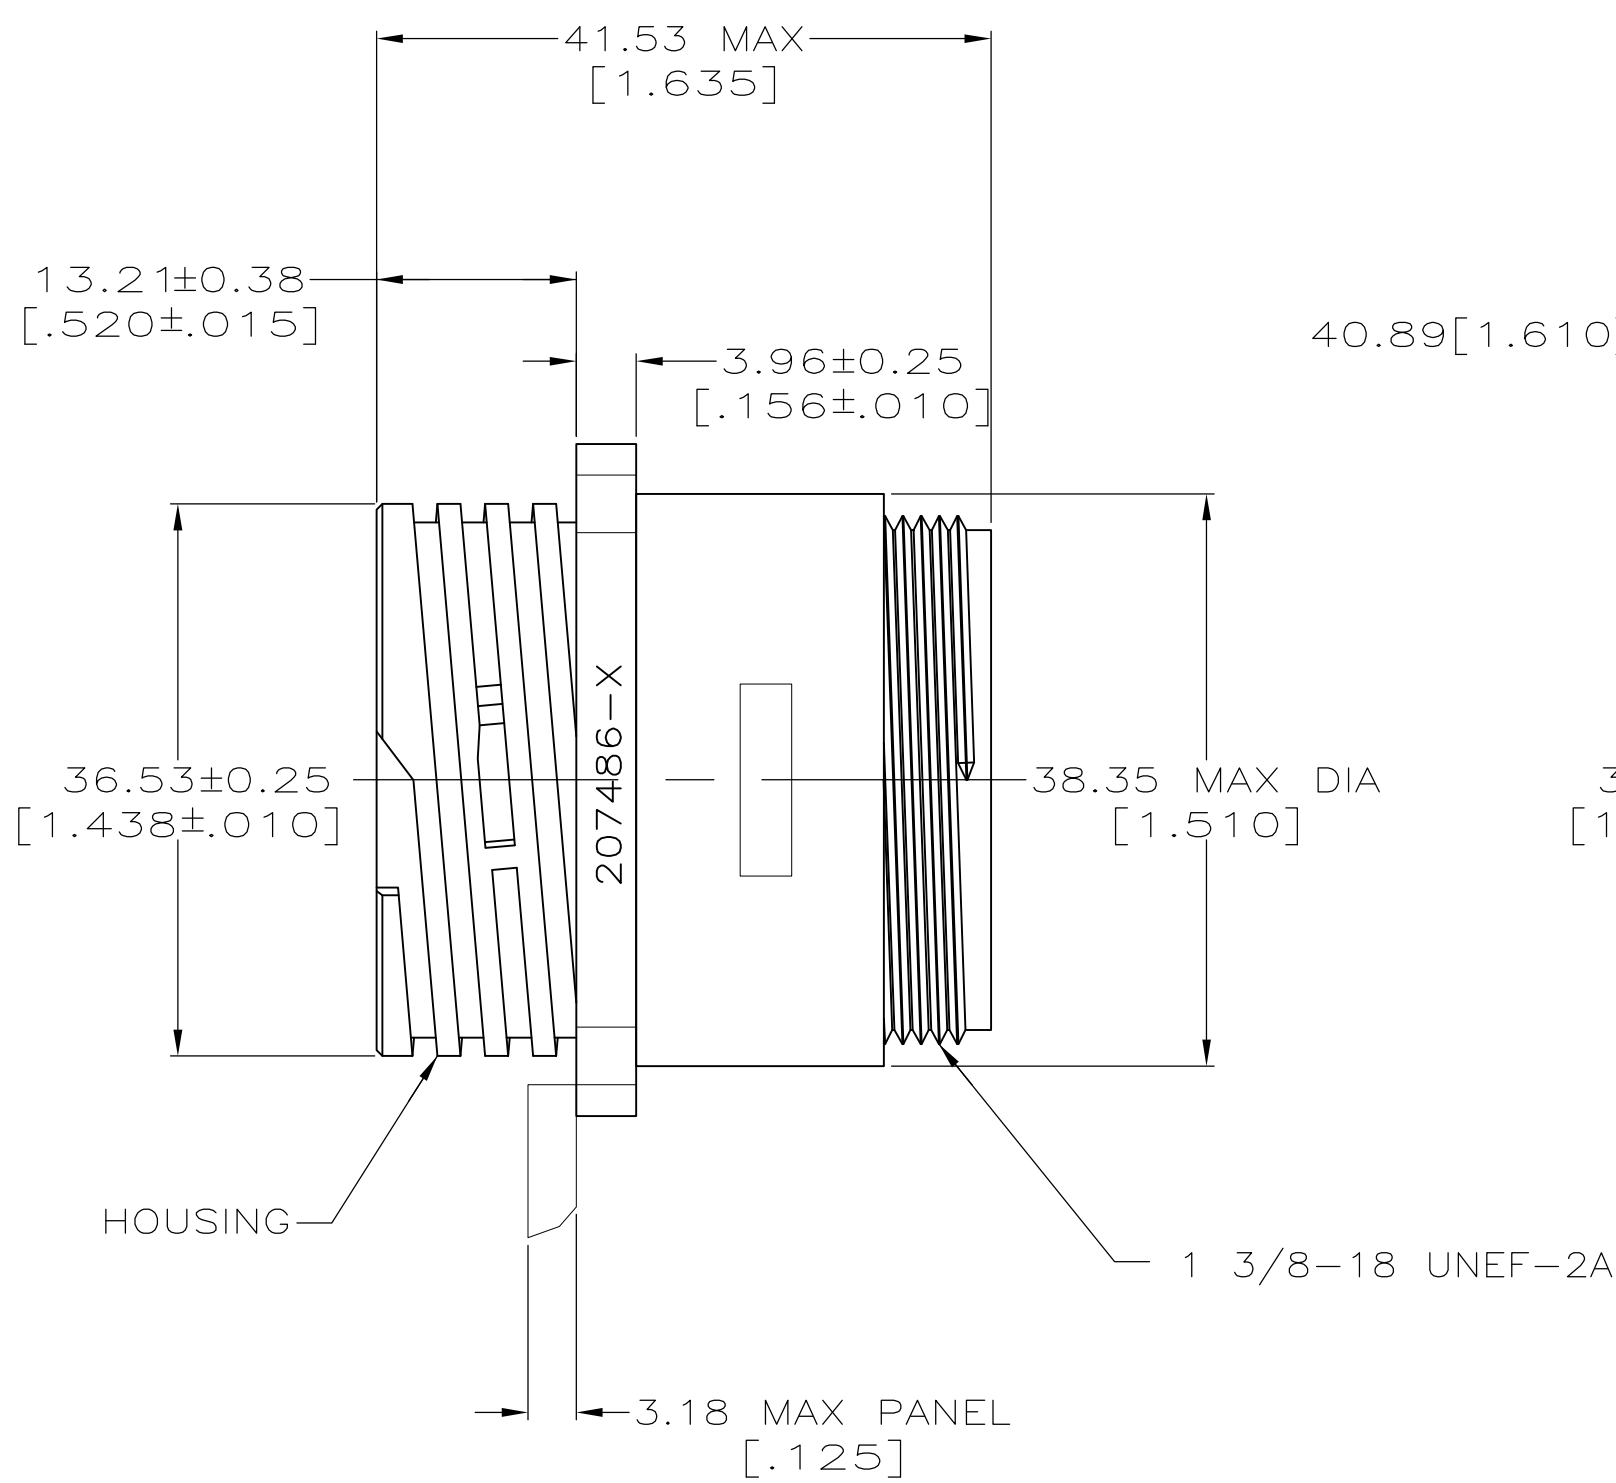
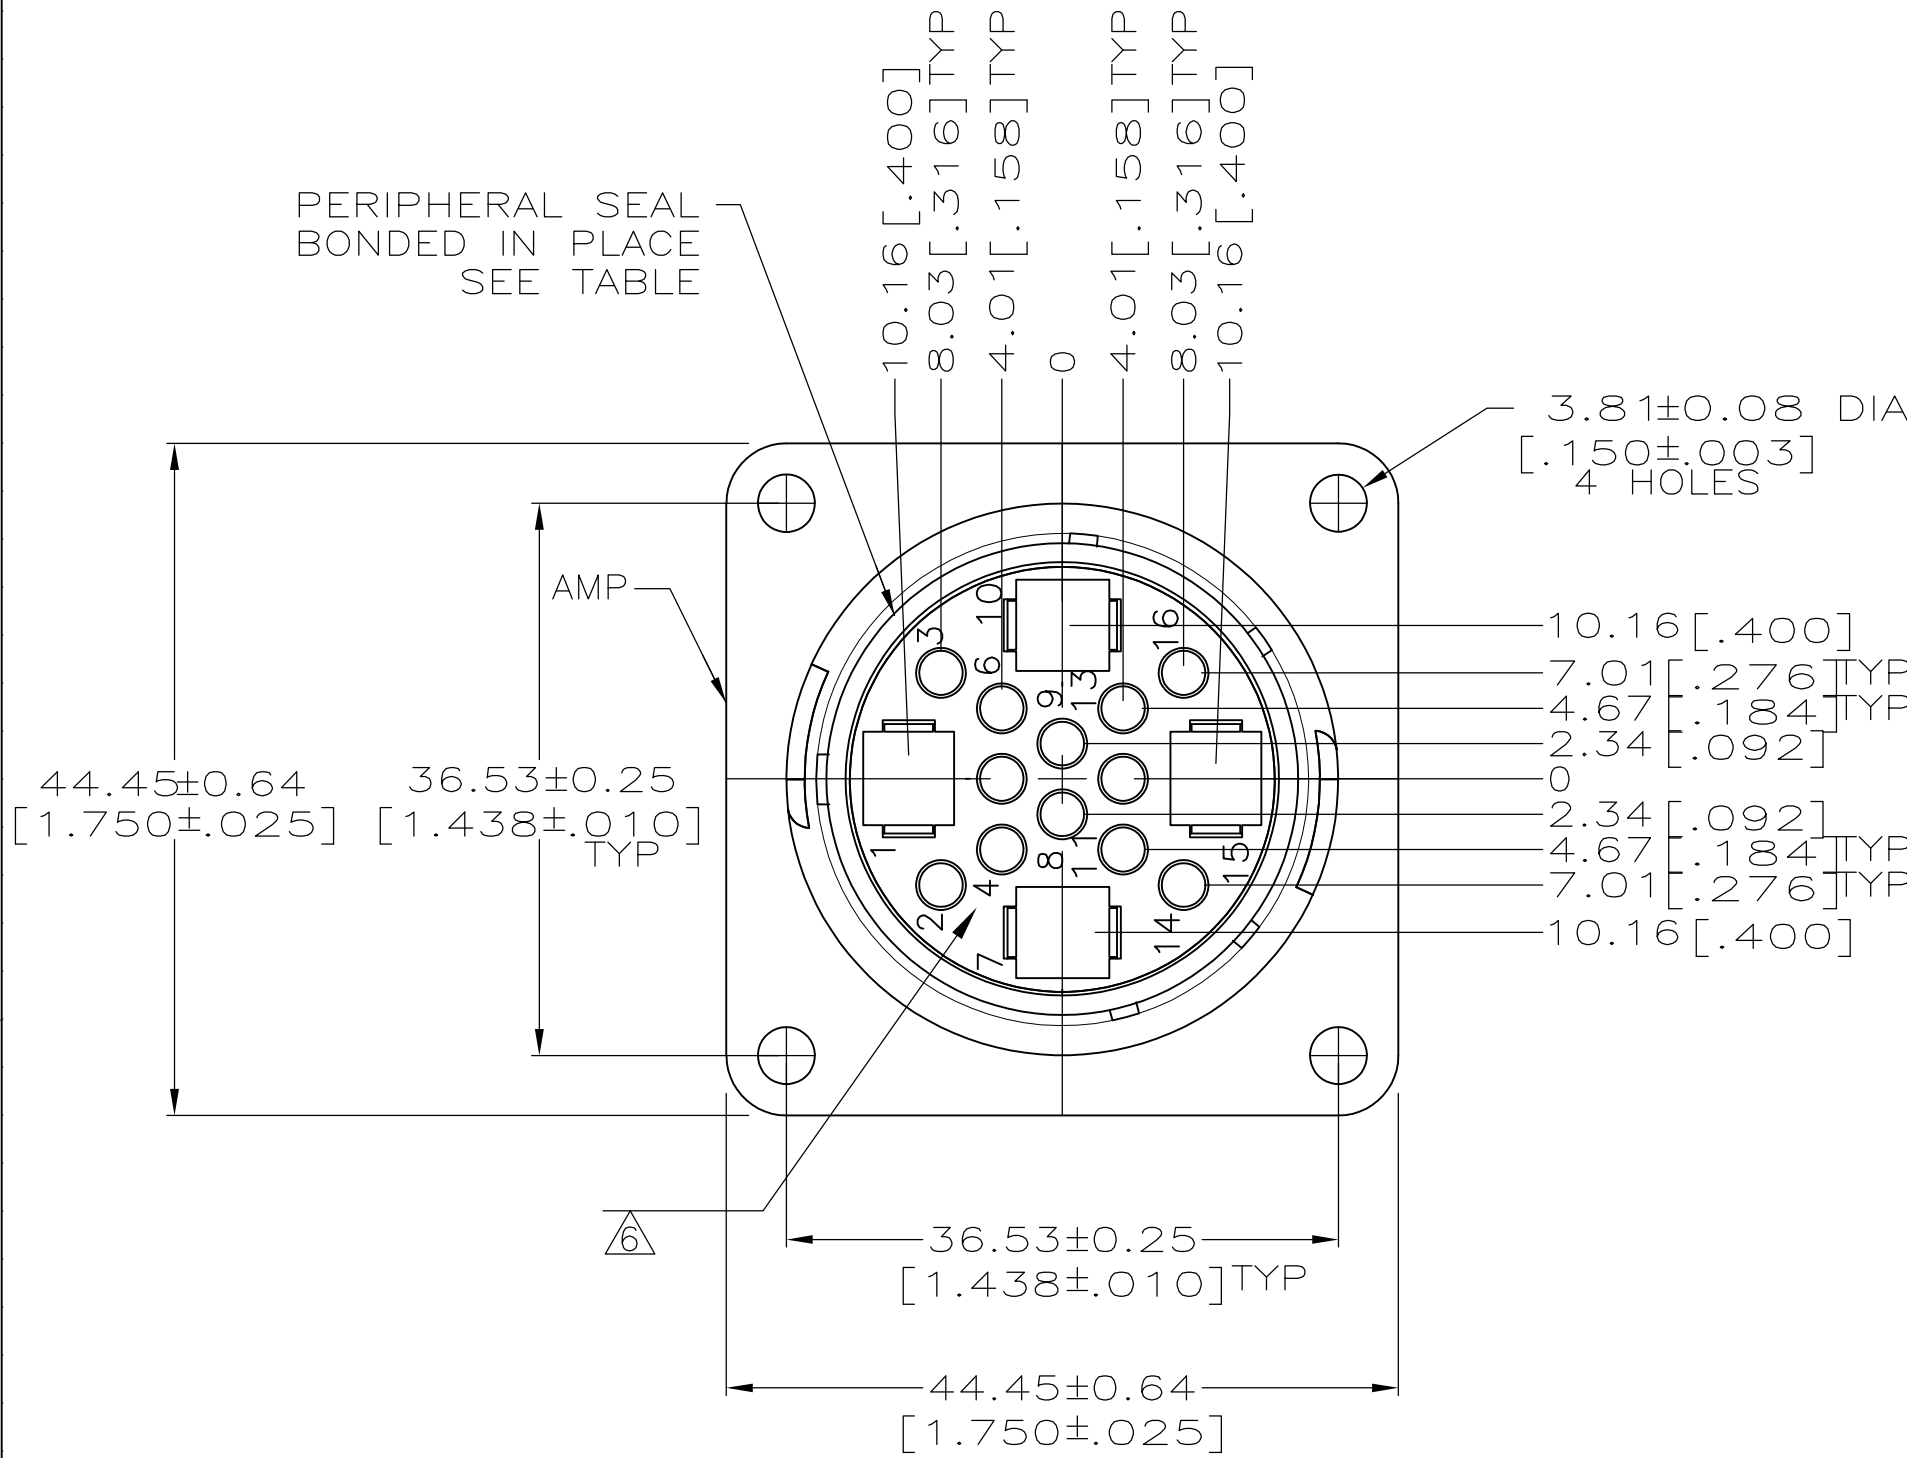


LOC		DIST		REVISIONS				
FT	0	P	LTR	DESCRIPTION	DATE	DWN	APVD	
		P2	REVISED	PER ECO-11-004820	11MAR11	RK	HMR	

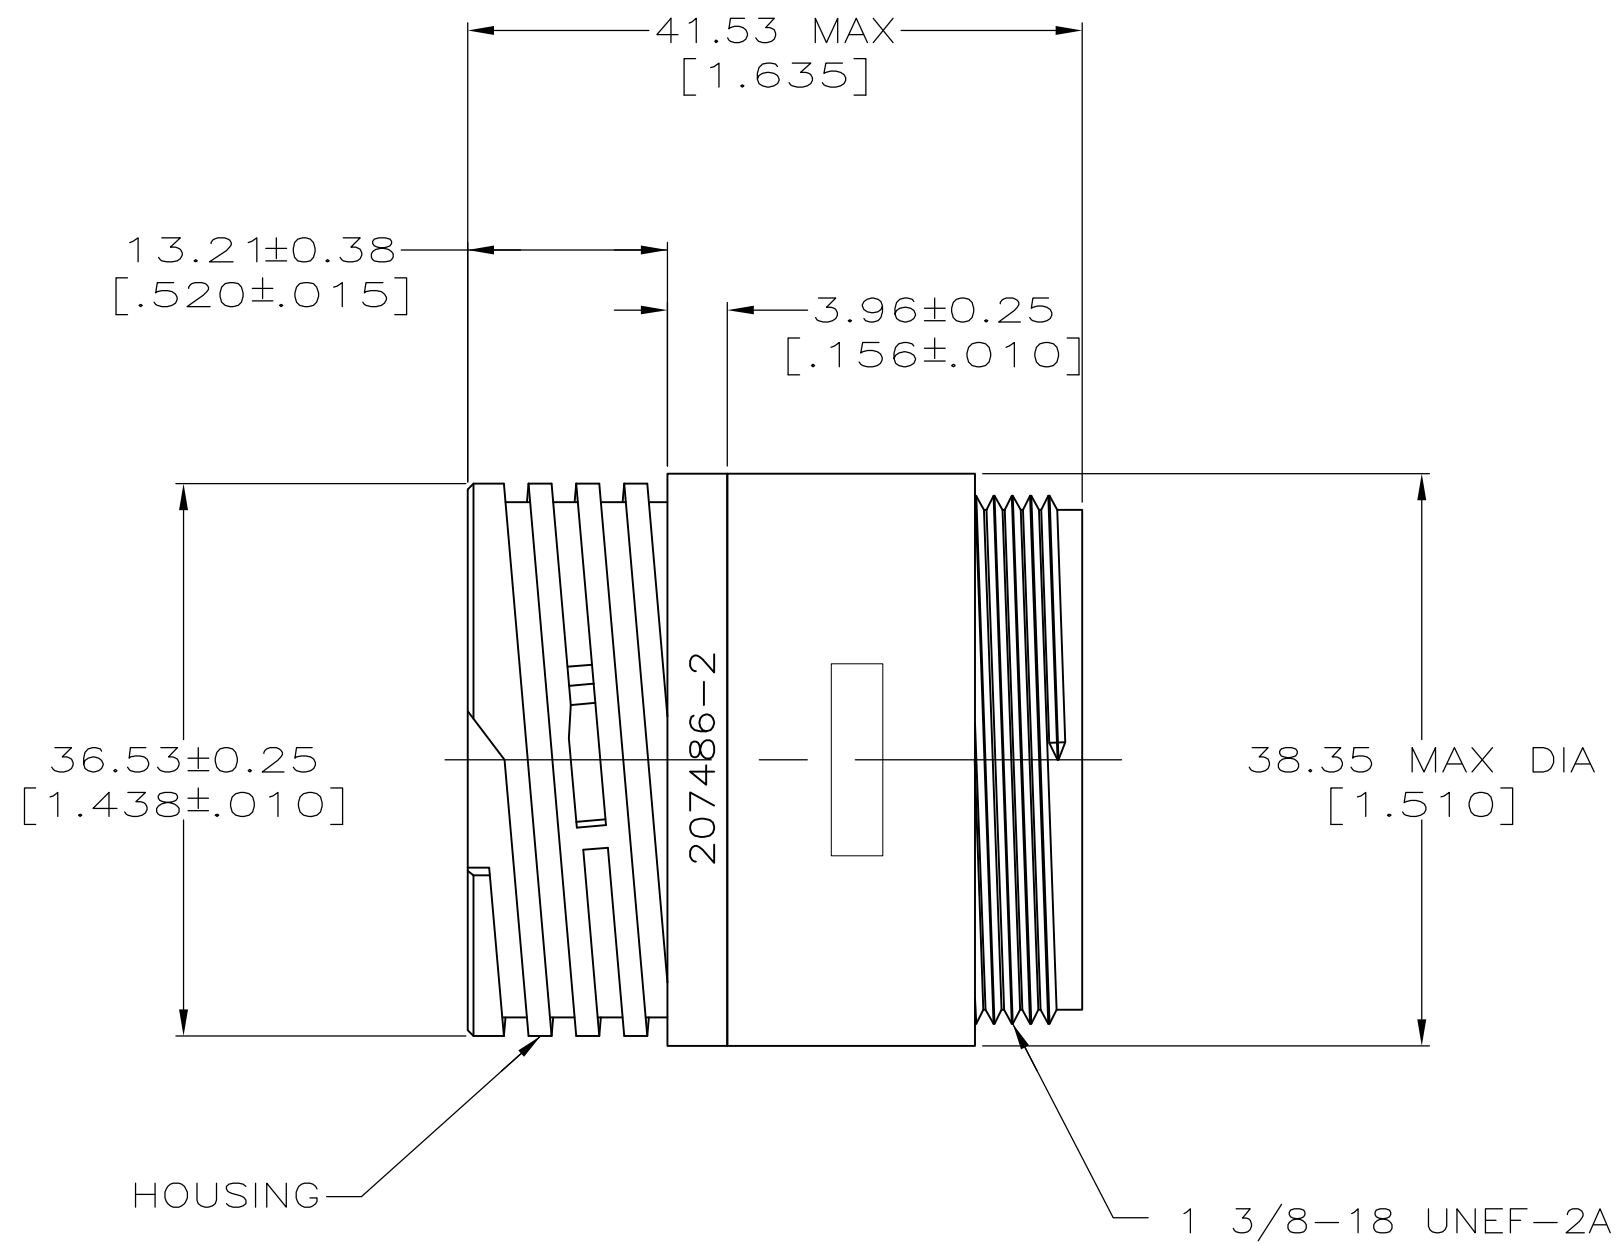

DETAIL A

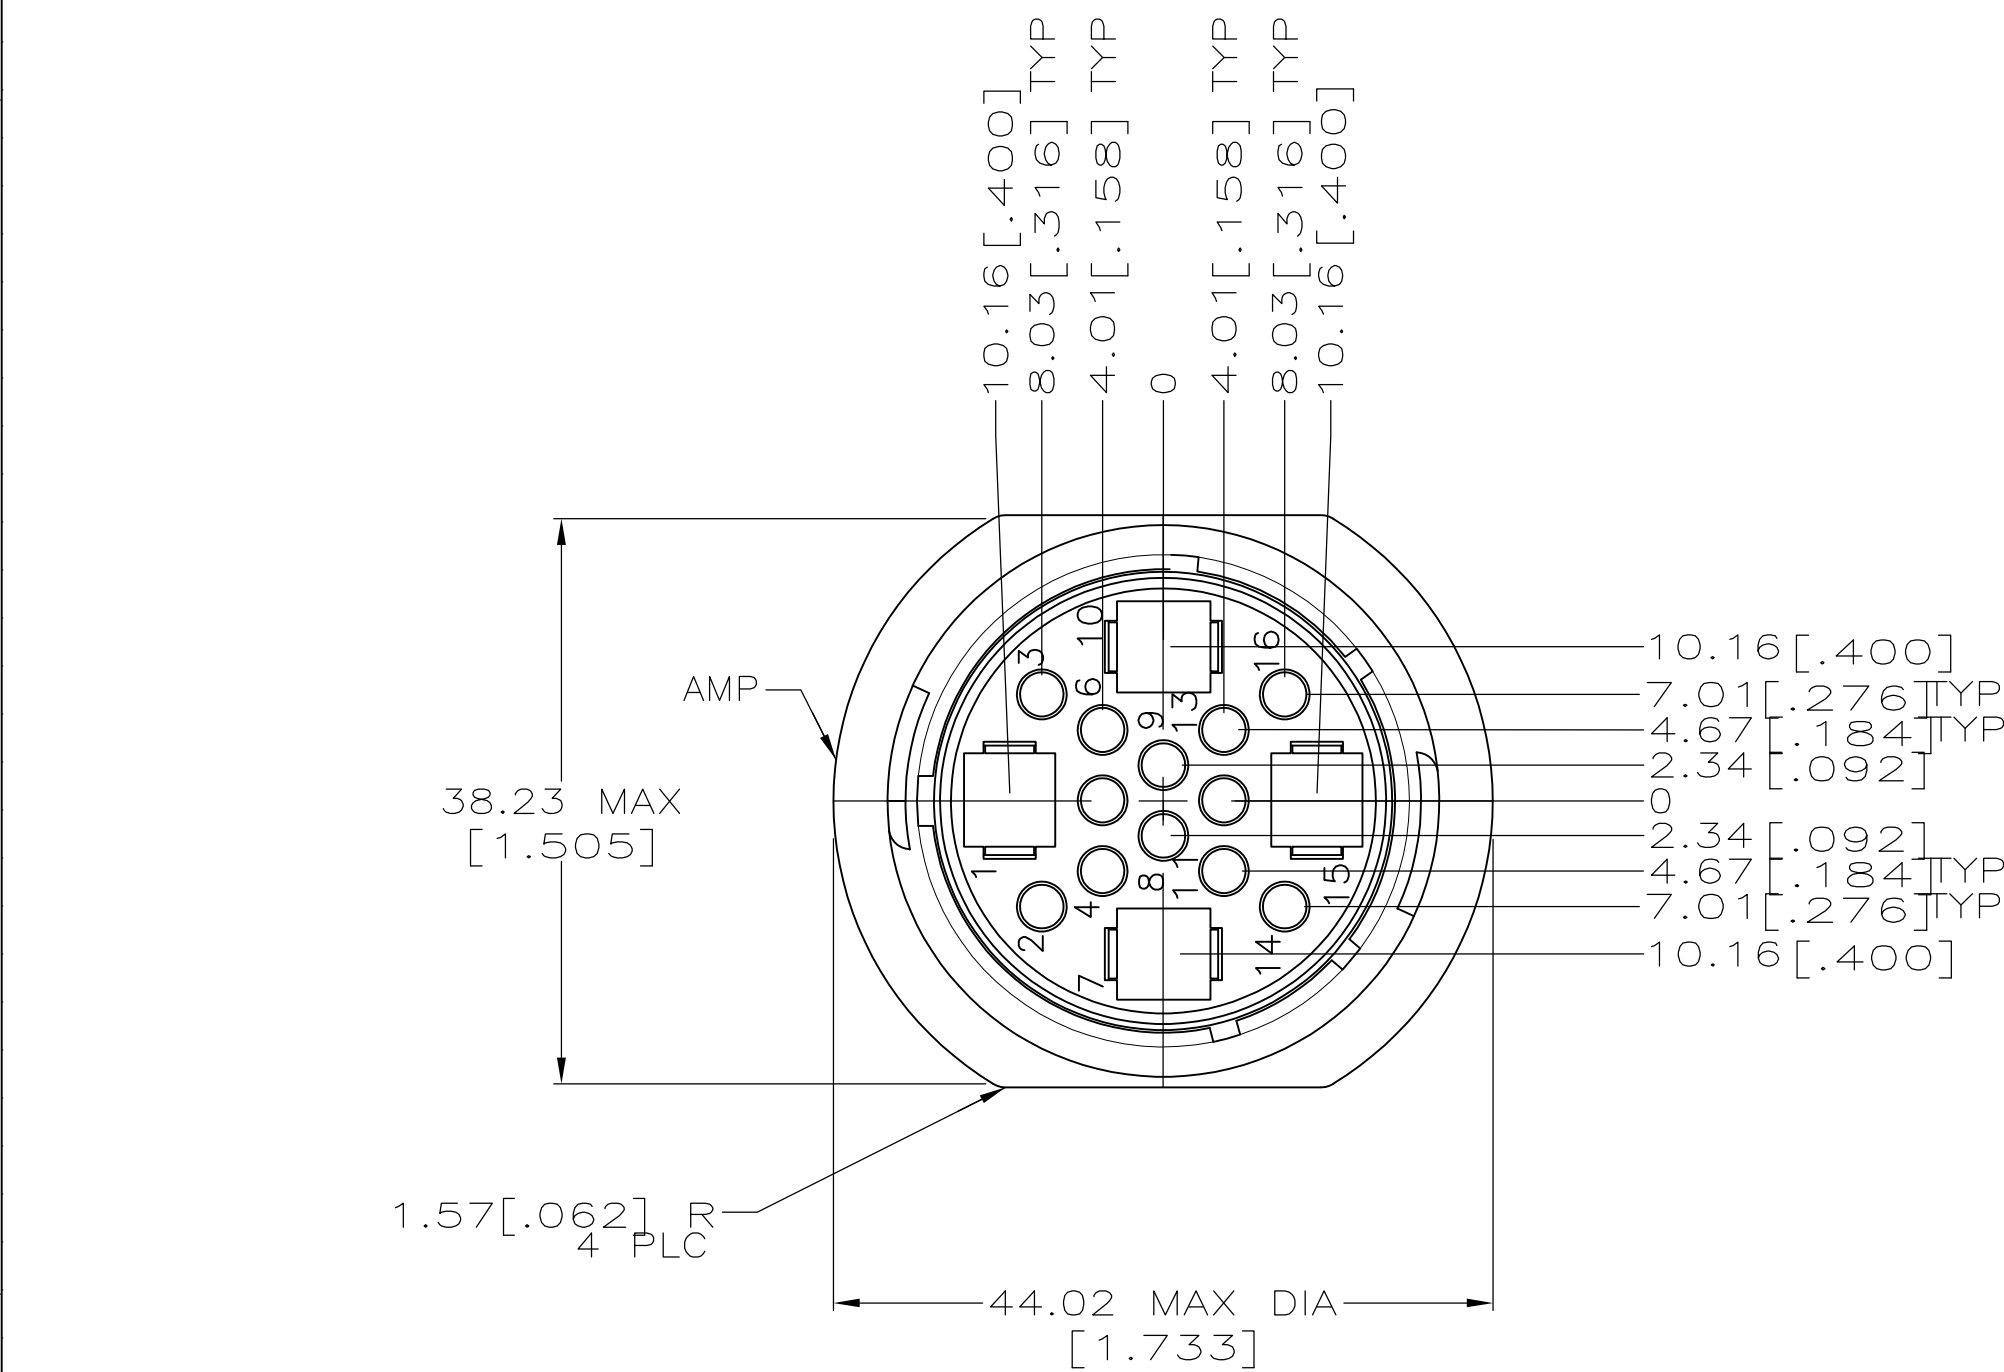

DETAIL B

- WILL ACCEPT (12) MULTIMATE AND (4) TYPE XII PIN CONTACTS.
 - CAVITY IDENTIFICATION ON FRONT AND REAR FACE.
 - NO. 4 FASTENERS RECOMMENDED FOR MOUNTING.
 - THIS CONNECTOR WILL ACCEPT INSULATION DIAMETERS UP TO 3.81 [.150].
- HOUSING: NYLON, BLACK.
- PERIPHERAL SEAL: ELASTOMER, GRAY.
- PERMANENT WHITE MARKED OR WHITE INK STAMPED CAVITY IDENTIFICATION.
- HOUSING: NYLON, RED.
- PERIPHERAL SEAL: ELASTOMER, GRAY.
- WHITE DOT NEAR POSITION 1 ON WIRE ENTRY FACE.

PRELIMINARY	8	-	YES	A	1-207486-1
PRELIMINARY	7	-	YES	A	207486-9
PRELIMINARY	6	-	YES	A	207486-7
	5	4	YES	A	207486-6
	4	-	YES	A	207486-5
	3	-	NO	B	207486-2
	2	-	NO	A	207486-1
NOTES		THREADED INSERTS	PERIPHERAL SEAL	SEE DETAIL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. BINNER 05/26/94	TE Connectivity		
DIMENSIONS: INCHES		CHK R. STONE 6-23-94	NAME		
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	
		0 PLC ± - 1 PLC ± - 2 PLC ± 0.13 [.005] 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH -		APPLICATION SPEC	
MATERIAL		WEIGHT		SIZE A1	
CUSTOMER DRAWING		SCALE 2:1		SHEET 1 OF 1	
				REV P2	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[207486-1](#)