

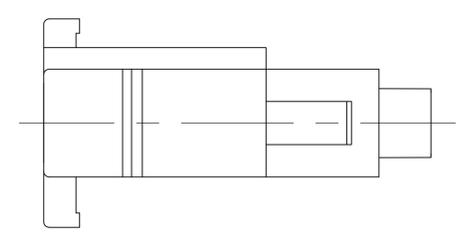



- 1 MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ CAP OR HEADER.
- 2 SMALL NICKS ARE PERMITTED ON THE CIRCUIT TOWERS WHICH COULD INCREASE THE INITIAL HOUSING MATING FORCE BY UP TO 4.4 NEWTONS [1.0 LBS]. NO INDIVIDUAL NICKED TOWER SHALL INCREASE THIS FORCE BY OVER 2.2 NEWTONS [.5 LBS].
- 3 DIMENSION INDICATED IS AS MOLDED. ADDITIONAL GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR.
- 4 FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL.
- 5 NOT MANUFACTURED IN U.S.
- 6 UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.
- 7 MATERIAL CORRESPONDING TO THE REQUIREMENT OF IEC60335-1 (INCL. GWT 750°C WITHOUT FLAME)

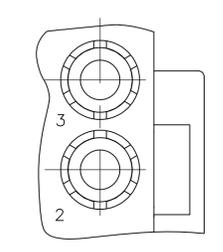


VIEW A-A
350779-4 ONLY

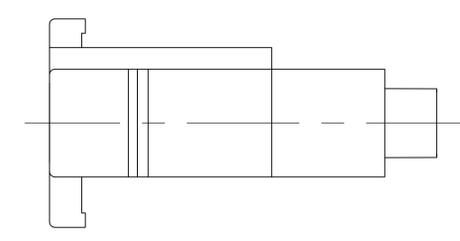


DETAIL A
OPTIONAL CONSTRUCTION

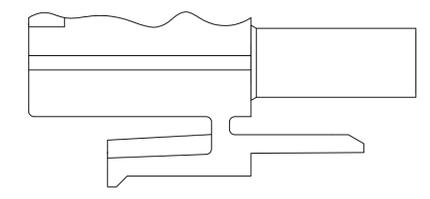

DETAIL B
350779-4 ONLY

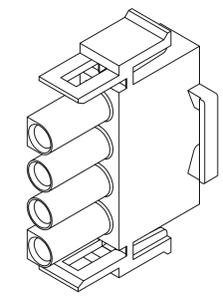

350779-4 3-DIMENSIONAL MODEL
NTS

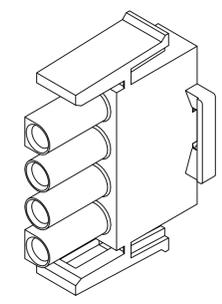

3-DIMENSIONAL MODEL
NTS

△ NATURAL	350779-5
BLACK	1-350779-9
GRAY	1-350779-8
BLUE	1-350779-6
GREEN	1-350779-5
YELLOW	1-350779-4
ORANGE	1-350779-3
RED	1-350779-2
BROWN	1-350779-1
△	350779-4
NATURAL	350779-1
COLOR	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN R VESTAL 03FEB95	TE Connectivity
mm	0. PLC ± .	CHK R SWING 03FEB95	
	1. PLC ± 0.4	APVD D SELF 03FEB95	NAME
	2. PLC ± 0.20	PRODUCT SPEC	PLUG, 4 CIRCUIT, UNIVERSAL MATE-N-LOK™
	3. PLC ± .	APPLICATION SPEC	
	4. PLC ± .	SIZE	SCALE
	ANGLES ± 0°30'	WEIGHT	SHEET 1 OF 1
MATERIAL NYLON,UL 94V-0	FINISH	A1 00779 C=350779	RESTRICTED TO
		CUSTOMER DRAWING	REV AB5

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[350779-1](#)