

4







3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS					
ES		00		P	LTR	DESCRIPTION	DATE	DWN	APVD
					C1	REVISED PER ECO-11-005033	25MAR11	RK	HMR

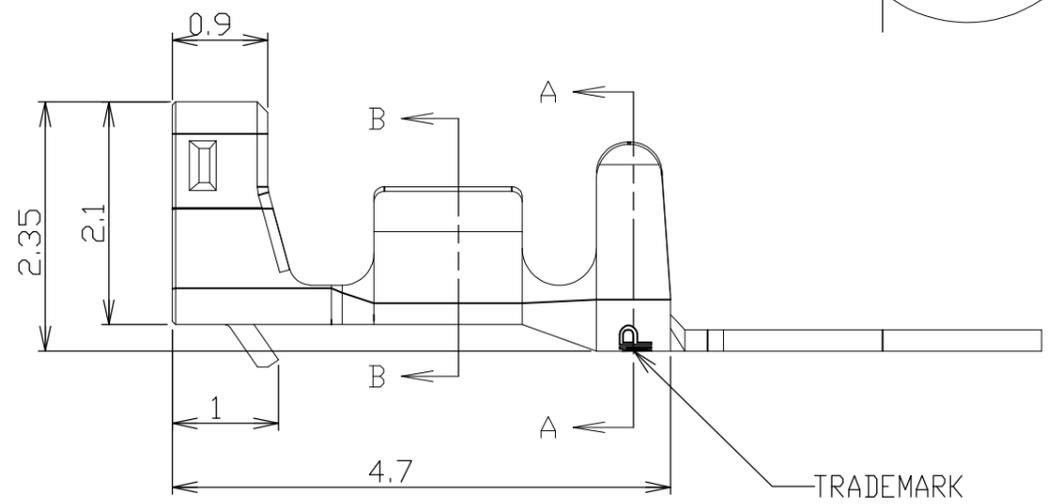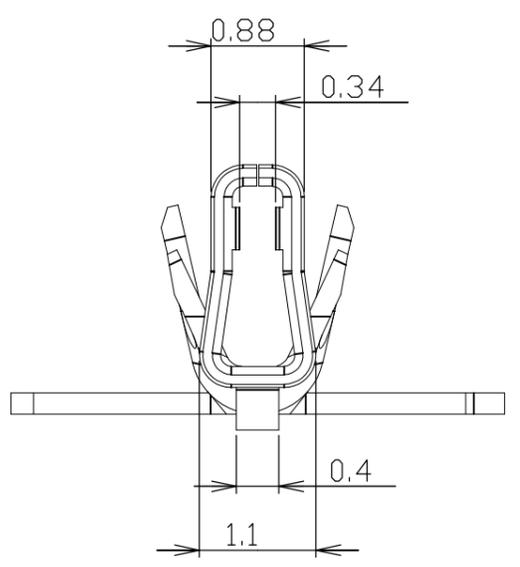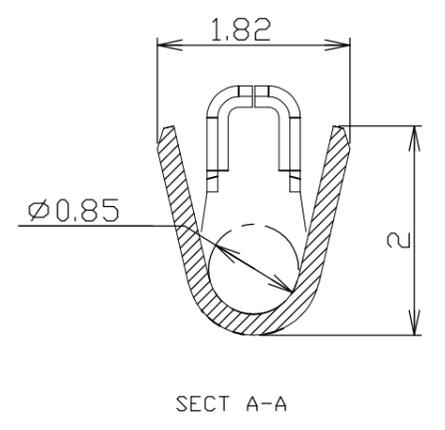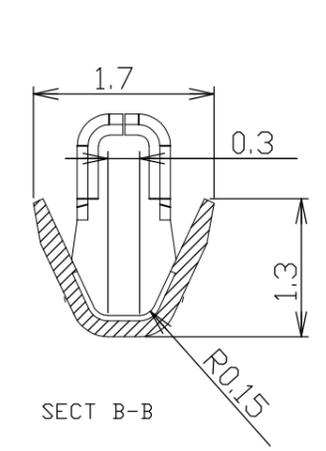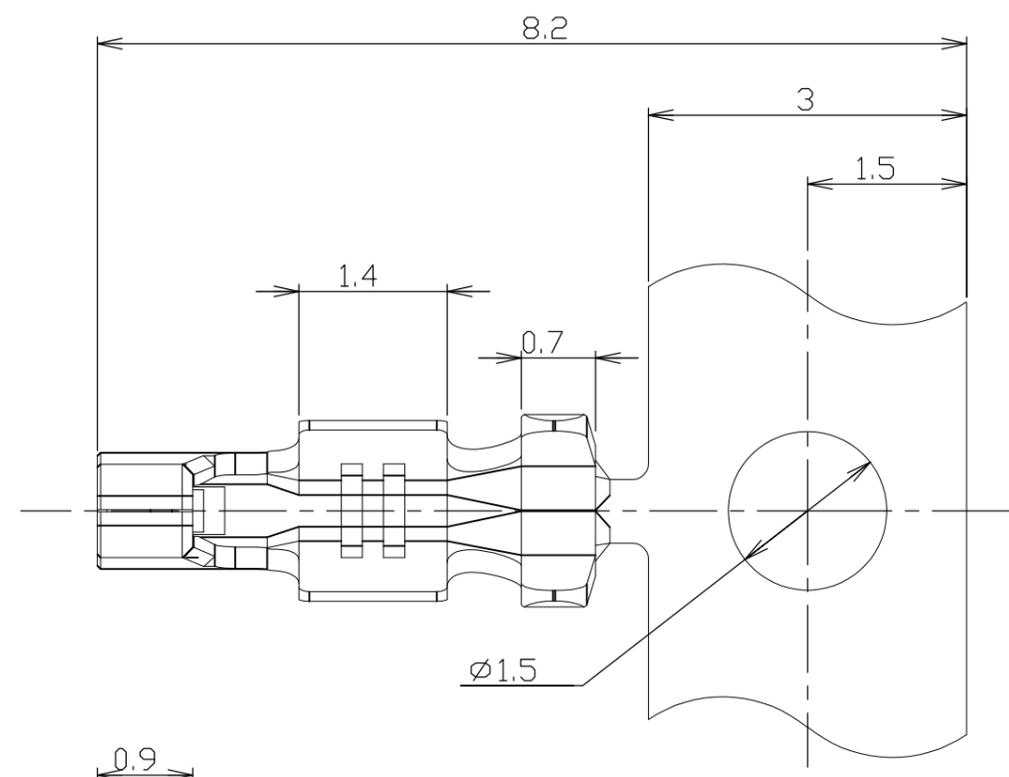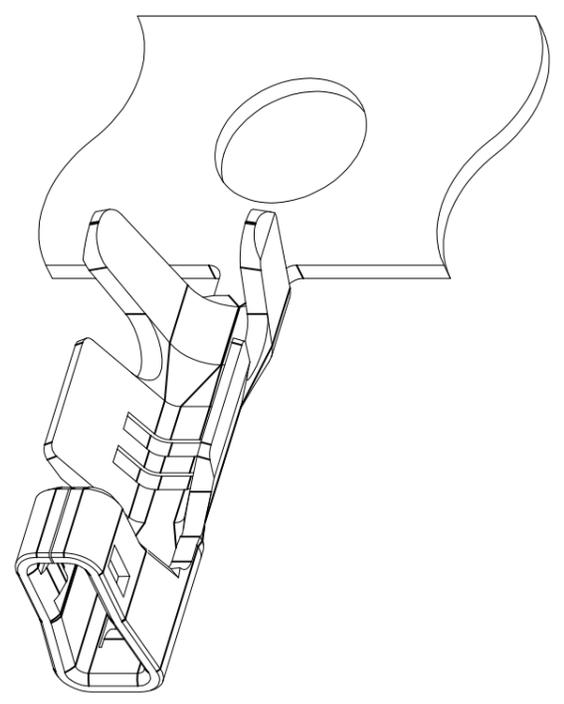

NOTES:  
 1. LOOSE PIECE CONTACT P/N:353918-1  
 2. USE WITH HOUSING P/N:X-353908-X

353907-1 AS SHOWN

GENERAL TOLERANCE

10 ≥	: ±0.2
30 ≥ > 10:	±0.25
100 ≥ > 30:	±0.3
ANGLES: ±3°	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ±-
	1 PLC ±-
	2 PLC ±-
	3 PLC ±-
	4 PLC ±-
	ANGLES ±-
MATERIAL PHOS-BRONZE, 0.2mm THK	FINISH PRE-TIN

WIRE RANGE 0.22mm <sup>2</sup> ~ 0.08mm <sup>2</sup> (AWG#24~AWG#28)		INSULATION DIA Ø1.05~Ø0.85	
DWN H.HOSHINO 26.APR'97	CHK J.TANIGAWA 26.APR'97	TE Connectivity AMP MINI COMMON TERMINATED (CT) CONNECTOR 1.5mm PITCH RECEPTACLE CONTACT(AWG#24~#28), CRIMP TYPE	
APVD WL CHOO	PRODUCT SPEC 108-60025		
APPLICATION SPEC 114-5245		SIZE A3	CAGE CODE 00779
WEIGHT 0.02g/ea		DRAWING NO C-353907	RESTRICTED TO
CUSTOMER DRAWING		SCALE NON	SHEET 1 OF 1
		REV C1	

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[353907-1](#)