

1 COORDINATE DIMENSION APPLIES FROM BASIC LOCATION.

2 10 AND 14 POSITION SIZES CONTAIN ONLY ONE SLOT FOR SNAP-IN POLARIZER (MILITARY POLARIZATION) LOCATED AS SHOWN.

3 10 POSITION SIZES CONTAIN ONLY ONE SLOT FOR DUAL POLARIZATION, LOCATED AS SHOWN.


4 RECOMMENDED PRINTED CIRCUIT BOARD THICKNESS IS 1.57 [.062].

5 DISTANCE REQUIRED BY EJECTION LATCHES IN THE OPEN POSITION.

6 HOUSING & LATCHES: GLASS FILLED NYLON OR POLYESTER, UL94V-0 RATED, BLACK. POSTS: PHOS BRONZE OR BRASS.


7 POSTS: GOLD FLASH OVER PALLADIUM-NICKEL PLATE,  $0.38\mu\text{m}$  [.000015] MIN TOTAL ON THE LOCALIZED PLATE AREA,  
 $2.54\mu\text{m}$  [.000100] MIN TIN PLATE ON THE SOLDER-TAILS,  
 $1.27\mu\text{m}$  [.000050] MIN NICKEL UNDERPLATE ON THE ENTIRE POST.  
-OR-  
 $0.38\mu\text{m}$  [.000015] MIN GOLD PLATE ON THE LOCALIZED PLATE AREA,  
 $2.54\mu\text{m}$  [.000100] MIN TIN PLATE ON THE SOLDER-TAILS,  
 $1.27\mu\text{m}$  [.000050] MIN NICKEL UNDERPLATE ON THE ENTIRE POST.

8 DATUMS -M- & -N- TO BE ESTABLISHED BY CUSTOMER.

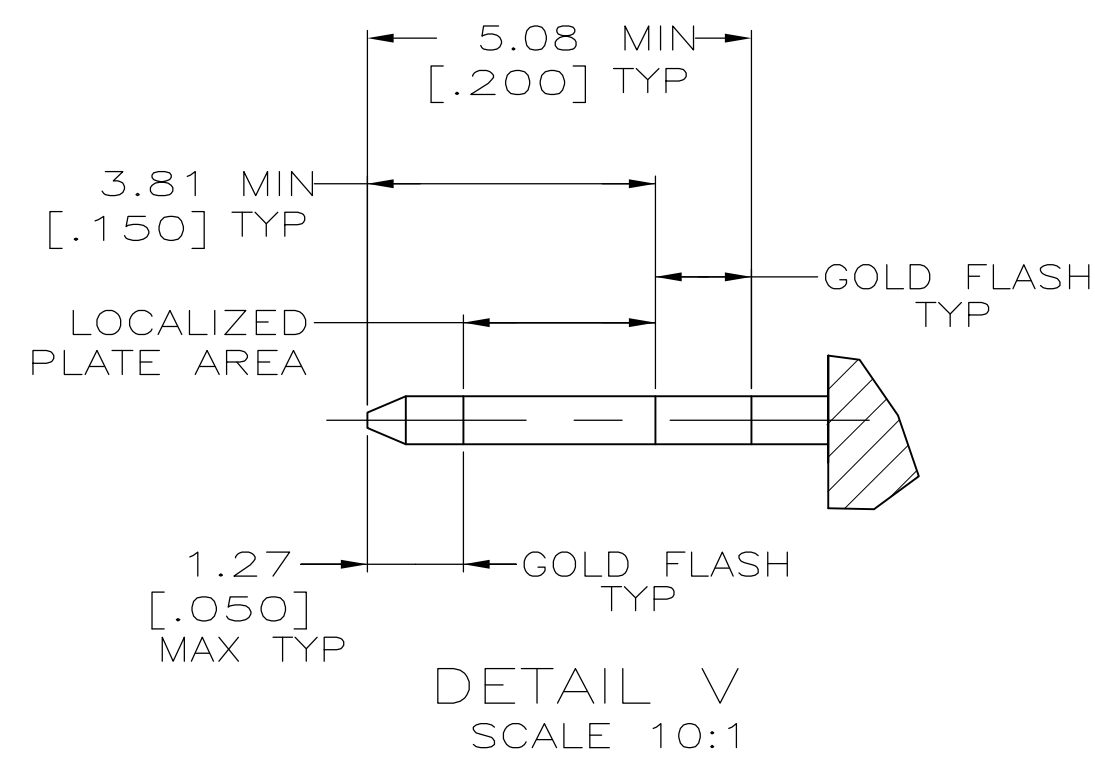

**COPYRIGHT 2005  
TE CONNECTIVITY CORP  
ALL RIGHTS RESERVED**

78.74 [3.100]	96.52 [3.800]	90.42 [3.560]	100.58 [3.960]	96.52 [3.800]	86.36 [3.400]	64	1-5499922-2
73.66 [2.900]	91.44 [3.600]	85.34 [3.360]	95.50 [3.760]	91.44 [3.600]	81.28 [3.200]	60	1-5499922-1
60.96 [2.400]	78.74 [3.100]	72.64 [2.860]	82.80 [3.260]	78.74 [3.100]	68.58 [2.700]	50	1-5499922-0
48.26 [1.900]	66.04 [2.600]	59.94 [2.360]	70.10 [2.760]	66.04 [2.600]	55.88 [2.200]	40	5499922-9
40.64 [1.600]	58.42 [2.300]	52.32 [2.060]	62.48 [2.460]	58.42 [2.300]	48.26 [1.900]	34	5499922-8
35.56 [1.400]	53.34 [2.100]	47.24 [1.860]	57.40 [2.260]	53.34 [2.100]	43.18 [1.700]	30	5499922-7
30.48 [1.200]	48.26 [1.900]	42.16 [1.660]	52.32 [2.060]	48.26 [1.900]	38.10 [1.500]	26	5499922-6
27.94 [1.100]	45.72 [1.800]	39.62 [1.560]	49.78 [1.960]	45.72 [1.800]	35.56 [1.400]	24	5499922-5
22.86 [.900]	40.64 [1.600]	34.54 [1.360]	44.70 [1.760]	40.64 [1.600]	30.48 [1.200]	20	5499922-4
17.78 [.700]	35.56 [1.400]	29.46 [1.160]	39.62 [1.560]	35.56 [1.400]	25.40 [1.000]	16	5499922-3
15.24 [.600]	33.02 [1.300]	26.92 [1.060]	37.08 [1.460]	33.02 [1.300]	22.86 [.900]	14	5499922-2
10.16 [.400]	27.94 [1.100]	21.84 [.860]	32.00 [1.260]	27.94 [1.100]	17.78 [.700]	10	5499922-1
F	E	D	C	B	A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN VARELA - DOCKS	01-11-05	 TE Connectivity	
		CHK S. BOLASH	01-11-05		
DIMENSIONS: MM [INCHES]		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		NAME	

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5499922-6](#)