

Universal Load Cell



FEATURES

- Capacities 50 to 10000kg (50 to 20Klb)
- Nickel plated steel construction
- Certified to NTEP class III 3000d and class IIIL 10000d
- Suitable for compression and tension applications
- Trimmed output versions available
- Sealing: IP65

OPTIONAL FEATURE

- FM approved for use in potentially explosive atmosphere

DESCRIPTION

The 363 is a multipurpose nickel plated S-Type load cell which can be used in tension or compression.


This product is suitable for a wide range of hybrid scales, overhead track scales, belt scales and process weighing applications.

Reliable sealing is ensured by the proprietary TRANSEAL potting compound and additional mechanical protection of the strain gauge area.

APPLICATIONS

- Suspended hoppers
- Overhead track scales
- Force measurement

OUTLINE DIMENSIONS in millimeters

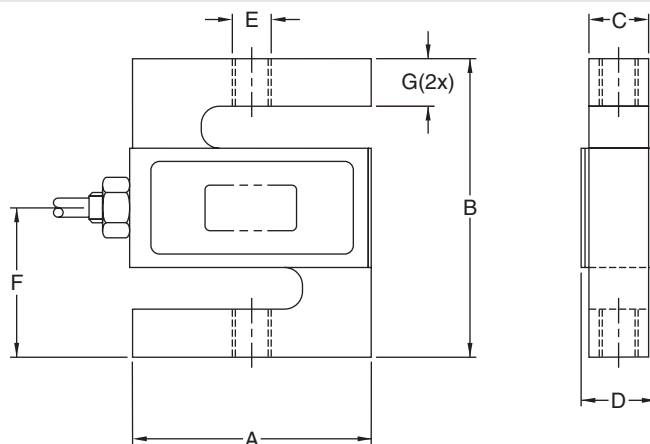

Cable specifications:

Cable length: 6m

Excitation +	Red
Excitation -	Black
Output +	Green
Output -	White
Shield	Transparent

Cable screen is not connected to load cell body

Cap (kg)	50, 100	250, 500	1000	2500	5000	7500	10000
Cap (lbs)	100, 200, 300	500 - 1.5K	2K, 2.5K	3K*, 5K	10K	15000	20000
A	50.8	50.8	50.8	76.2	74.7	87.4	112.8
B	61.0	61.0	61.0	99.1	99.1	139.7	177.8
C	11.7	18.0	24.4	24.4	30.7	37.1	42.9
D _{max}	16.5	22.9	29.2	29.2	35.6	41.4	47.8
E (kg)	M8x1.25 - 6H	M12x1.75 - 6H		M20x1.5 - 6H		M24x2 - 6H	M30x2 - 6H
E (lbs)	¼ - 28UNF - 2B	½ - 20UNF - 2B		¾ - 16UNF - 2B		1 - 14UNF - 2B	1 ¼ - 12UNF - 2B
F	30.5	30.5	30.5	49.5	49.3	69.9	88.9
G	8.9	8.9	8.9	14.0	15.7	22.4	31.8

* 3Klb version has ½ - 20UNF - 2B tapped holes

**SPECIFICATIONS**

PARAMETER	VALUE		UNIT
Standard capacities ($E_{\max}$)	50, 100, 250, 500, 1000, 2500, 5000, 7500, 10000		kg
Standard capacities ($E_{\max}$)	50, 75, 100, 150, 200, 250, 300, 500, 750, 1K, 1.5K, 2K, 2.5K, 3K, 5K, 10K, 15K, 20K		lbs
Accuracy class per NTEP	NTEP IIIIL	Non-Approved	
Maximum no. of verification intervals (n)	10000		mV/V
Rated output ($\pm S$)	3.0		mV/V
Rated output tolerance	0.0075		$\pm$ mV/V
Zero balance	1.0		$\pm$ % FSO
Combined error	0.0200	0.05	$\pm$ % FSO
Non-repeatability	0.0100	0.0200	$\pm$ % FSO
Minimum dead load output return	0.0500		$\pm$ % applied load
Creep error (30 minutes)	-	0.0600	$\pm$ % applied load
Creep error (20 minutes)	0.0030	0.0200	$\pm$ % applied load
Temperature effect on min. dead load output	0.0090	0.0250	$\pm$ % FSO/5°C
Temperature effect on sensitivity	0.0072	0.0250	$\pm$ % applied load/5°C
Minimum dead load	0		% $E_{\max}$
Maximum safe over load	150		% $E_{\max}$
Ultimate over load	300		% $E_{\max}$
Maximum safe side load	100		% $E_{\max}$
Excitation voltage	5 to 12		V
Maximum excitation voltage	15		V
Input resistance	430 $\pm$ 60		Ω
Output resistance	350 $\pm$ 3.5		Ω
Insulation resistance	$\geq$ 5000		M Ω
Compensated temperature range	-10 to +40		°C
Operating temperature range	-40 to +80		°C
Storage temperature range	-40 to +90		°C
Element material (DIN)	Nickel plated alloy steel		
Sealing (DIN 40.050 / EN60.529)	IP65		

FSO-Full Scale Output

VISHAY TRANSDUCERS (VT) SALES OFFICES

VT Americas
City of Industry, CA
PH: +1-626-858-8899
FAX: +1-626-332-3418
vt.us@vishaymg.com

VT Netherlands
Breda
PH: +31-76-548-0700
FAX: +31-76-541-2854
vt.nl@vishaymg.com

VMG UK
Basingstoke
PH: +44-125-646-2131
FAX: +44-125-647-1441
vt.uk@vishaymg.com

VMG Israel
Netanya
PH: +972-9-863-8888
FAX: +972-9-863-8800
vt.il@vishaymg.com

VMG Germany
Heilbronn
PH: +49-7131-3901-260
FAX: +49-7131-3901-2666
vt.de@vishaymg.com

VT China
Tianjin
PH: +86-22-2835-3503
FAX: +86-22-2835-7261
vt.prc@vishaymg.com

VMG France
Chartres
PH: +33-2-37-33-31-20
FAX: +33-2-37-33-31-29
vt.fr@vishaymg.com

VT Taiwan*
Taipei
PH: +886-2-2696-0168
FAX: +886-2-2696-4965
vt.roc@vishaymg.com
*Asia except China



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.