

# Model SSB

Vishay Revere



## Single Ended Load Beam



### FEATURES

- Capacities: 0.5, 1, 2, and 5 tons
- Fully welded, stainless steel construction
- Hermetically sealed, IP66 and IP68
- Certified to OIML R-60, 4000d and NTEP 10000d
- Current calibration output (SC version) ensures easy and accurate parallel connection of multiple load cells
- Digital version available (model SBC)

### OPTIONAL FEATURE

- ATEX- EEx ib IIC T6 hazardous area approval
- FM approval available



### DESCRIPTION

The SSB is a stainless steel single ended shear beam type load cell.

This robust product is suitable for a wide range of platform scales, pallet scales, overhead track scales and process weighing applications.



The fully welded construction and water block cable entry ensure that this product can be

used successfully in harsh environments found in the food, chemical and allied process industries.

This product meets the stringent Weights and Measures requirements throughout Europe and the USA.

### APPLICATIONS

- Platform scales
- Belt scales
- Pallet scales
- Overhead track scales
- On-board weighing
- Silo hopper weighing

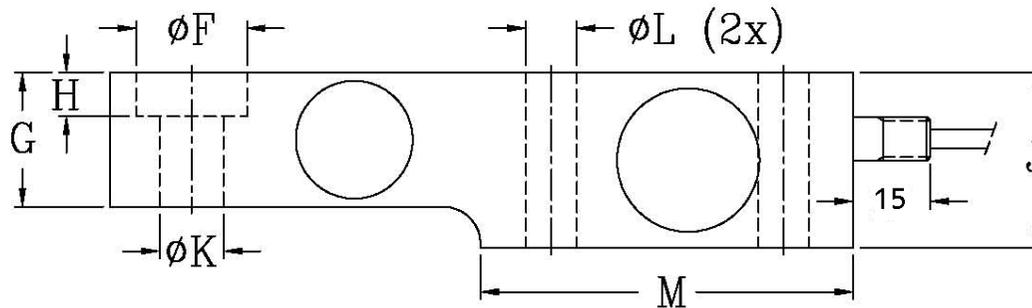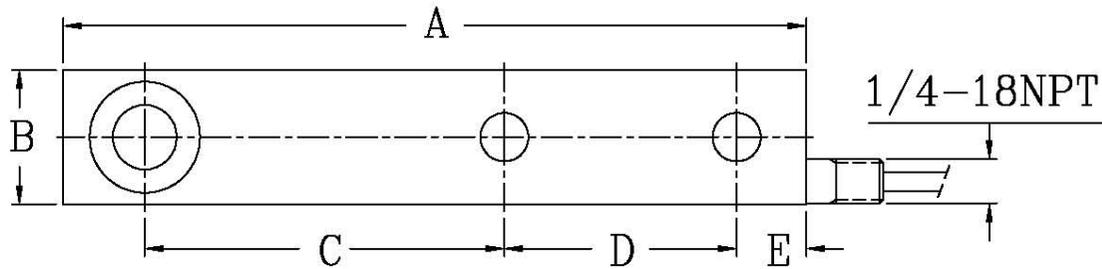

Capacity(kg)	500-2000	5000	10000
A	203.2	235.0	235.0
B	36.5	47.5	55.0
C	98.4	123.8	123.8
D	63.5	66.7	66.7
E	19.1	20.6	20.6
F	30.2	41.3 <sup>+0.2</sup>	41.3 <sup>+0.2</sup>
G	36.5	47.6	58.6
H	11.9	15.8	15.8
J	47.6	69.9	69.9
K	17.5 H11	25.5 H11	25.5 H11
L	14.0	22.0	25.0
M	101.6	111.2	111.2

Note: Dimensions in millimeters

REVERE TRANSDUCERS EUROPE			THIS DRAWING SHALL NOT BE REPRODUCED WITHOUT PERMISSION OF REVERE TRANSDUCERS EUROPE	
GEN.TOL ±	ANGLE ±	MATERIAL:	PROJ.	
SCALE None	ROUGHN. <input checked="" type="checkbox"/>	FINISH:	DATE :	
DRAWING :			DATE :	
DRAWING : Outline of SSB			—	— SIZE A4
			SHEET: 1 OF 1	Rev. A4

**SPECIFICATIONS**

PARAMETER	VALUE					UNIT
	0.5, 1, 2, 5*		2, 5*			
Standard capacities ( $E_{max}$ )	0.5, 1, 2, 5*		2, 5*			t
Accuracy class according to OIML R-60	NTEP IIII	Non-Approved	C3	C3MI8	C4	
Max. no. of verification intervals	10000		3000	3000	4000	
Min. verification interval ( $V_{min}=E_{max}/Y$ )			$E_{max}/10,000$	$E_{max}/15,000$	$E_{max}/10,000$	
MDLOR ( $Z=E_{max}/2*DR$ )			--	8000	--	
Min. verification interval, type MR			$E_{max}/20,000$		$E_{max}/20,000$	
Rated output (=S)	2					mV/V
Rated output tolerance	0.02					$\pm$ mV/V
Zero balance	1.0					$\pm$ % FSO
Combined error	0.0200	0.0500	0.0200	0.0200	0.0170	$\pm$ % FSO
Non-repeatability	0.0100	0.0200	0.0100	0.0100	0.0090	$\pm$ % FSO
Minimum dead load output return	0.0250	0.0500	0.0167	0.0063	0.0125	$\pm$ % applied load
Creep error (30 minutes)		0.0600	0.0245	0.0245	0.0184	$\pm$ % applied load
Creep error (20 minutes)	0.030	0.0200	0.0053	0.0053	0.0039	$\pm$ % applied load
Temp. effect on min. dead load output	(0.001)	0.0250	0.0070	0.0050	0.0070	$\pm$ % FSO/5°C (°F)
Temp. effect on min. dead load output, type MR			0.0035		0.0035	$\pm$ % FSO/5°C
Temperature effect on sensitivity	(0.0008)	0.0250	0.0050	0.0050	0.0045	$\pm$ % applied load/5°C (°F)
Minimum dead load	0					% $E_{max}$
Maximum safe over load	150					% $E_{max}$
Ultimate over load	300					% $E_{max}$
Maximum safe side load	100					% $E_{max}$
Deflection at $E_{max}$	0.5 max.					mm
Excitation voltage	5 to 15					V
Maximum excitation voltage	18					V
Input resistance	350 $\pm$ 3.5					$\Omega$
Output resistance	350 $\pm$ 3.5					$\Omega$
Insulation resistance	$\geq$ 5000					M $\Omega$
Compensated temperature range	-10 to +40					°C
Operating temperature range	-40 to +80					°C
Storage temperature range	-40 to +90					°C
Element material	Stainless steel 1.4542					
Sealing (DIN 40.050 / EN60.529)	IP66 & IP68					
SC-Version (current calibration)	Standard					
Recommended torque on fixation bolts	0.5-2t: 110 / 5t: 540					N*m

\* for 10 ton capacity please consult factory

FSO-Full Scale Output

SC-version: The rated output and the output resistance are balanced in such a way, that the output current is calibrated to within 0.05% of a reference value. This allows easy parallel connection of the load cells.

**VISHAY TRANSDUCERS (VT) SALES OFFICES**

**VT Americas**  
City of Industry, CA  
PH: +1-626-858-8899  
FAX: +1-626-332-3418  
vt.us@vishaymg.com

**VT Netherlands**  
Breda  
PH: +31-76-548-0700  
FAX: +31-76-541-2854  
vt.nl@vishaymg.com

**VMG UK**  
Basingstoke  
PH: +44-125-646-2131  
FAX: +44-125-647-1441  
vt.uk@vishaymg.com

**VMG Israel**  
Netanya  
PH: +972-9-863-8888  
FAX: +972-9-863-8800  
vt.il@vishaymg.com

**VMG Germany**  
Heilbronn  
PH: +49-7131-3901-260  
FAX: +49-7131-3901-2666  
vt.de@vishaymg.com

**VT China**  
Tianjin  
PH: +86-22-2835-3503  
FAX: +86-22-2835-7261  
vt.prc@vishaymg.com

**VMG France**  
Chartres  
PH: +33-2-37-33-31-20  
FAX: +33-2-37-33-31-29  
vt.fr@vishaymg.com

**VT Taiwan\***  
Taipei  
PH: +886-2-2696-0168  
FAX: +886-2-2696-4965  
vt.roc@vishaymg.com  
\*Asia except China



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.