


Single Ended Beam Load Cell

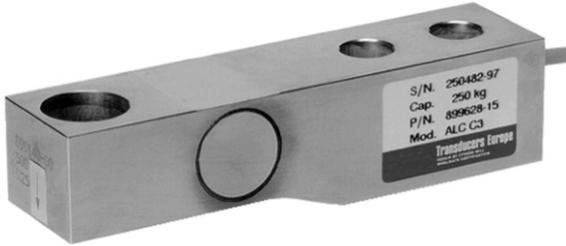

DESCRIPTION

The ALC is a low profile stainless steel bending beam type load cell. An integral mounting step removes the need for spacer plates and ensures optimum “bolt down” conditions.

This product is suitable for small and medium platform scales, hybrid scales, pallet weighers and process weighing.

A reliable sealing and mechanical protection of the strain gauge area is ensured by the use of potting compound with a metal cover.

ALC Beams meet the stringent Weights and Measures requirements throughout Europe.


FEATURES

- Capacities: 250, 500, 1000, and 2000kg
- Low profile, stainless steel construction
- Certified to OIML R-60, 3000d
- Sealing: IP67 (EN 60.529)
- 1000 Ohm bridge impedance
- Mechanically interchangeable with existing model HCB
- Current calibration output (SC version) ensures easy and accurate parallel connection of multiple load cells
- Integral mounting step

APPLICATIONS


- Platform scales
- Belt scales
- Pallet scales
- Overhead track scales
- Silo hopper weighing

OUTLINE DIMENSIONS in millimeters

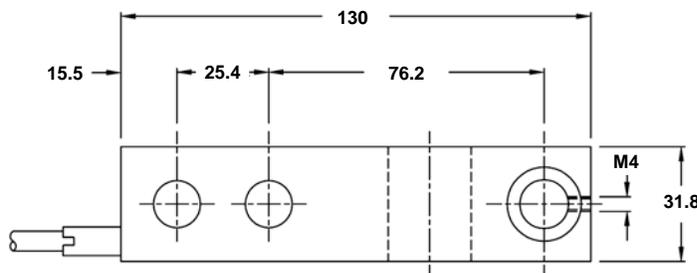

Cable specifications :
Cable length: 3 meters

Excitation+ Green
Excitation - Black
Output+ White
Output - Red
Shield Clear

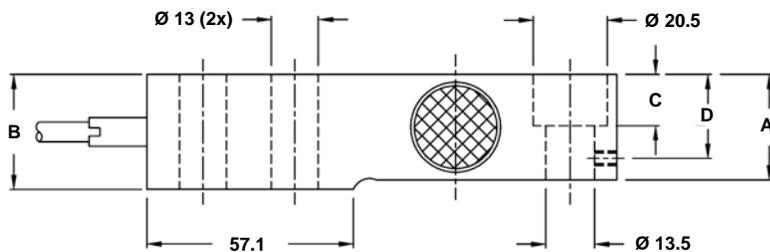

Capacity (kg)	250	500	1000	2000
A	25.2	26.1	29.2	34.0
B	31.8	31.8	31.8	35.8
C	13.2	14.2	14.2	14.2
D	22.2	23.2	23.2	23.2

Note: Dimensions in millimeters

SPECIFICATIONS				
PARAMETER	VALUE			UNIT
Standard capacities (E_{max})	250, 500, 1000, 2000			kg
Accuracy class according to OIML R-60	Non-Approved	C3	C3MR	
Maximum no. of verification intervals (n)		3000	3000	
Minimum verification interval (V_{min})		$E_{max}/10,000$	$E_{max}/20,000$	
Rated output (=S)	2			mV/V
Tolerance on rated output	0.02			%mV/V
Zero balance	1.0			±% FSO
Combined error	0.0500	0.0200	0.0200	±% FSO
Non-repeatability	0.0200	0.0100	0.0100	±% FSO
Minimum dead load output return	0.0500	0.0167	0.0167	±% applied load
Creep error (30 minutes)	0.0600	0.0245	0.0245	±% applied load
Creep error (20 - 30 minutes)	0.0200	0.0053	0.0053	±% applied load
Temperature effect on minimum dead load	0.0250	0.0070	0.0035	±% FSO/5°C
Temperature effect on sensitivity	0.0250	0.0045	0.0045	±% applied load/%°C
Minimum dead load	0			% E_{max}
Maximum safe over load	150			% E_{max}
Ultimate Over load	300			% E_{max}
Maximum safe side load	100			% E_{max}
Deflection at E_{max}	0.20, 0.20, 0.22, 0.31			mm
Excitation voltage	5 to 12			V
Maximum excitation voltage	15			V
Input resistance	1000±10			Ω
Output resistance	1000±10			Ω
Insulation resistance	≥5000			MΩ
Compensated temperature range	-10 to +40			°C
Operating temperature range	-40 to +80			°C
Storage temperature range	-40 to +90			°C
Element material (DIN)	Stainless steel 1.4542			
Sealing (DIN 40.050 / EN60.529)	IP67			
SC-Version (current calibration)	Standard			
Recommended torque on fixation bolts	50 to 75			N*m

FSO - Full Scale Output

SC-version: The rated output and the output resistance are balanced in such a way, that the output current is calibrated to within 0.05% of a reference value. This allows easy parallel connection of the load cells.

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

Vishay Precision Group makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, Vishay Precision Group disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on Vishay Precision Group's knowledge of typical requirements that are often placed on Vishay Precision Group products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.