

# Insulated Gate Bipolar Transistor

## Ultralow $V_{CE(on)}$ , 342 A


**SOT-227**


### PRODUCT SUMMARY

$V_{CES}$	600 V
$V_{CE(on)}$ (typical) at 200 A, 25 °C	1.33 V
$I_C$ at $T_C = 97\text{ °C}$ <sup>(1)</sup>	200 A

**Note**

<sup>(1)</sup> Maximum  $I_{RMS}$  current admitted 100 A to do not exceed the maximum temperature of terminals

### FEATURES

- Standard: Optimized for minimum saturation voltage and low speed up to 5 kHz
- Lowest conduction losses available
- Fully isolated package (2500 V<sub>AC</sub>)
- Very low internal inductance (5 nH typical)
- Industry standard outline
- UL approved file E78996 
- Compliant to RoHS directive 2002/95/EC
- Designed and qualified for industrial level


**RoHS**  
COMPLIANT

### BENEFITS

- Designed for increased operating efficiency in power conversion: UPS, SMPS, TIG welding, induction heating
- Easy to assemble and parallel
- Direct mounting to heatsink
- Plug-in compatible with other SOT-227 packages

### ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	TEST CONDITIONS	MAX.	UNITS
Collector to emitter breakdown voltage	$V_{CES}$		600	V
Continuous collector current	$I_C$ <sup>(1)</sup>	$T_C = 25\text{ °C}$	342	A
		$T_C = 97\text{ °C}$	200	
Pulsed collector current	$I_{CM}$	Repetitive rating; $V_{GE} = 20\text{ V}$ , pulse width limited by maximum junction temperature See fig. 15	400	
Clamped Inductive load current	$I_{LM}$	$V_{CC} = 80\% (V_{CES})$ , $V_{GE} = 20\text{ V}$ , $L = 10\text{ }\mu\text{H}$ , $R_g = 2.0\text{ }\Omega$ , See fig. 14	400	
Gate to emitter voltage	$V_{GE}$		$\pm 20$	V
Reverse voltage avalanche energy	$E_{ARV}$	Repetitive rating; pulse width limited by maximum junction temperature	155	mJ
RMS isolation voltage	$V_{ISOL}$	Any terminal to case, $t = 1\text{ minute}$	2500	V
Maximum power dissipation	$P_D$	$T_C = 25\text{ °C}$	781	W
		$T_C = 100\text{ °C}$	312	
Operating junction and storage temperature range	$T_J, T_{Stg}$		- 55 to + 150	°C
Mounting torque		6-32 or M3 screw	12 (1.3)	lbf · in (N · m)

**Note**

<sup>(1)</sup> Maximum  $I_{RMS}$  current admitted 100 A to do not exceed the maximum temperature of terminals

### THERMAL AND MECHANICAL SPECIFICATIONS

PARAMETER	SYMBOL	TYP.	MAX.	UNITS
Junction to case	$R_{thJC}$	-	0.16	°C/W
Case to sink, flat, greased surface	$R_{thCS}$	0.05	-	
Weight of module		30	-	g

ELECTRICAL SPECIFICATIONS ( $T_J = 25\text{ }^{\circ}\text{C}$ unless otherwise noted)						
PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNITS
Collector to emitter breakdown voltage	$V_{(BR)CES}$	$V_{GE} = 0\text{ V}$ , $I_C = 250\text{ }\mu\text{A}$	600	-	-	V
Emitter to collector breakdown voltage	$V_{(BR)ECS}^{(1)}$	$V_{GE} = 0\text{ V}$ , $I_C = 1.0\text{ A}$	18	-	-	
Temperature coeff. of breakdown voltage	$\Delta V_{(BR)CES}/\Delta T_J$	$V_{GE} = 0\text{ V}$ , $I_C = 1.0\text{ mA}$	-	0.62	-	V/ $^{\circ}\text{C}$
Collector to emitter saturation voltage	$V_{CE(on)}$	$I_C = 100\text{ A}$	-	1.10	1.3	V
		$I_C = 200\text{ A}$	-	1.33	-	
		$I_C = 100\text{ A}$ , $T_J = 150\text{ }^{\circ}\text{C}$	-	1.02	-	
Gate threshold voltage	$V_{GE(th)}$	$V_{CE} = V_{GE}$ , $I_C = 250\text{ }\mu\text{A}$	3.0	-	6.0	
Temperature coeff. of threshold voltage	$\Delta V_{GE(th)}/\Delta T_J$	$V_{CE} = V_{GE}$ , $I_C = 2\text{ mA}$	-	- 10	-	mV/ $^{\circ}\text{C}$
Forward transconductance	$g_{fe}^{(2)}$	$V_{CE} = 100\text{ V}$ , $I_C = 100\text{ A}$	90	150	-	S
Zero gate voltage collector current	$I_{CES}$	$V_{GE} = 0\text{ V}$ , $V_{CE} = 600\text{ V}$	-	-	1.0	mA
		$V_{GE} = 0\text{ V}$ , $V_{CE} = 10\text{ V}$ , $T_J = 150\text{ }^{\circ}\text{C}$	-	-	10	
Gate to emitter leakage current	$I_{GES}$	$V_{GE} = \pm 20\text{ V}$	-	-	$\pm 250$	nA

**Notes**(1) Pulse width  $\leq 80\text{ }\mu\text{s}$ ; duty factor  $\leq 0.1\%$ (2) Pulse width  $5.0\text{ }\mu\text{s}$ , single shot

SWITCHING CHARACTERISTICS ( $T_J = 25\text{ }^{\circ}\text{C}$ unless otherwise specified)						
PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNITS
Total gate charge (turn-on)	$Q_g$	$I_C = 100\text{ A}$ $V_{CC} = 400\text{ V}$ $V_{GE} = 15\text{ V}$ ; See fig. 8	-	770	1200	nC
Gate emitter charge (turn-on)	$Q_{ge}$		-	100	150	
Gate collector charge (turn-on)	$Q_{gc}$		-	260	380	
Turn-on delay time	$t_{d(on)}$	$T_J = 25\text{ }^{\circ}\text{C}$ $I_C = 100\text{ A}$ $V_{CC} = 480\text{ V}$ $V_{GE} = 15\text{ V}$ $R_g = 2.0\text{ }\Omega$ Energy losses include "tail" See fig. 9, 10, 13	-	78	-	ns
Rise time	$t_r$		-	56	-	
Turn-off delay time	$t_{d(off)}$		-	890	1300	
Fall time	$t_f$		-	390	580	
Turn-on switching loss	$E_{on}$	Energy losses include "tail" See fig. 9, 10, 13	-	0.98	-	mJ
Turn-off switching loss	$E_{off}$		-	17.4	-	
Total switching loss	$E_{ts}$		-	18.4	25.5	
Turn-on delay time	$t_{d(on)}$	$T_J = 150\text{ }^{\circ}\text{C}$ $I_C = 100\text{ A}$ , $V_{CC} = 480\text{ V}$ $V_{GE} = 15\text{ V}$ , $R_g = 2.0\text{ }\Omega$ Energy losses include "tail" See fig. 10, 11, 13	-	72	-	ns
Rise time	$t_r$		-	60	-	
Turn-off delay time	$t_{d(off)}$		-	1500	-	
Fall time	$t_f$		-	660	-	
Total switching loss	$E_{ts}$		-	35.7	-	mJ
Internal emitter inductance	$L_E$	Between lead, and center of the die contact	-	5.0	-	nH
Input capacitance	$C_{ies}$	$V_{GE} = 0\text{ V}$ $V_{CC} = 30\text{ V}$ $f = 1.0\text{ MHz}$ ; See fig. 7	-	16 250	-	pF
Output capacitance	$C_{oes}$		-	1040	-	
Reverse transfer capacitance	$C_{res}$		-	190	-	

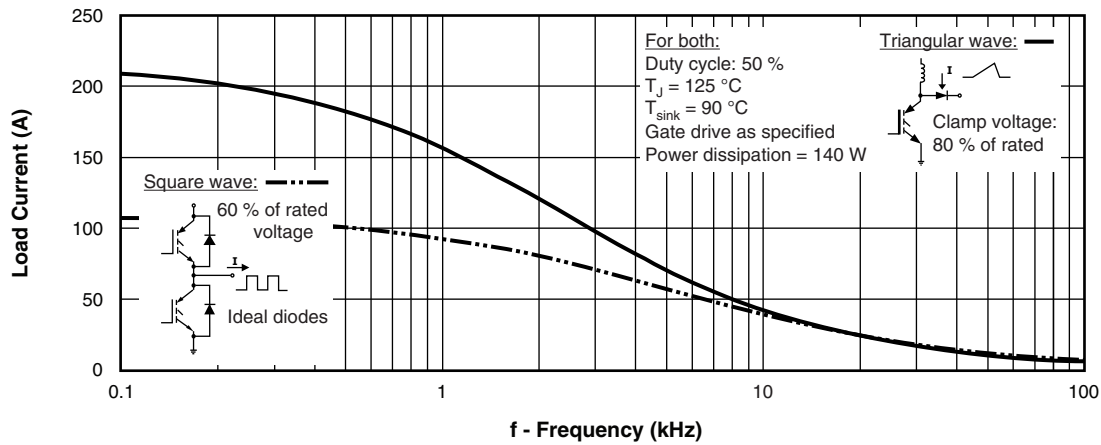


Fig. 1 - Typical Load Current vs. Frequency  
(Load Current =  $I_{RMS}$  of Fundamental)

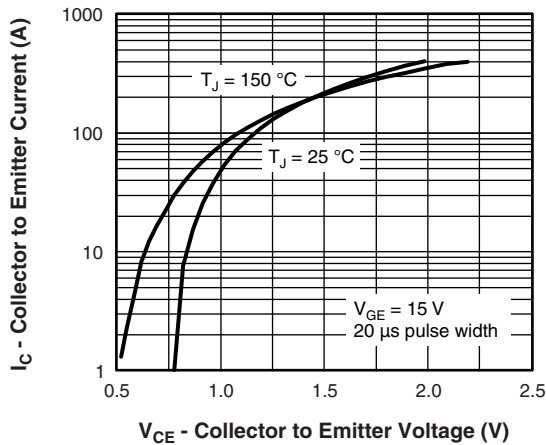


Fig. 2 - Typical Output Characteristics

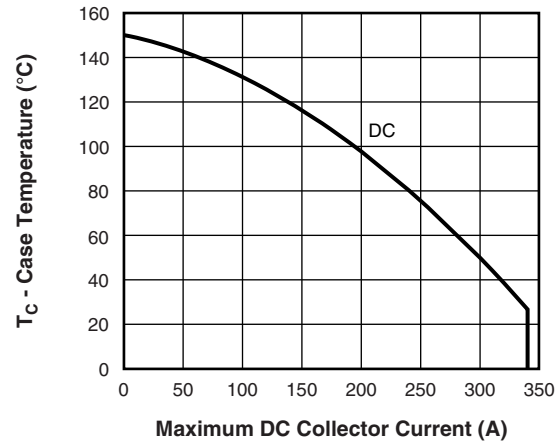


Fig. 4 - Maximum Collector Current vs. Case Temperature

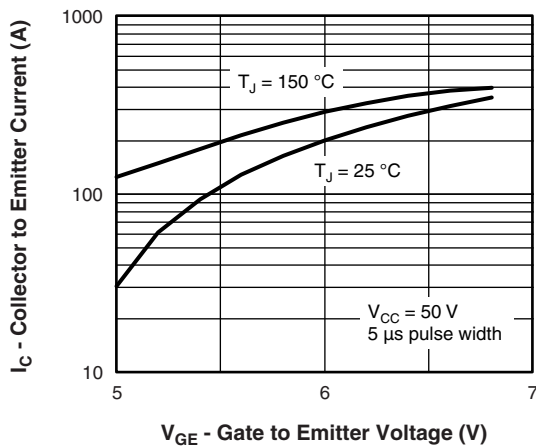


Fig. 3 - Typical Transfer Characteristics

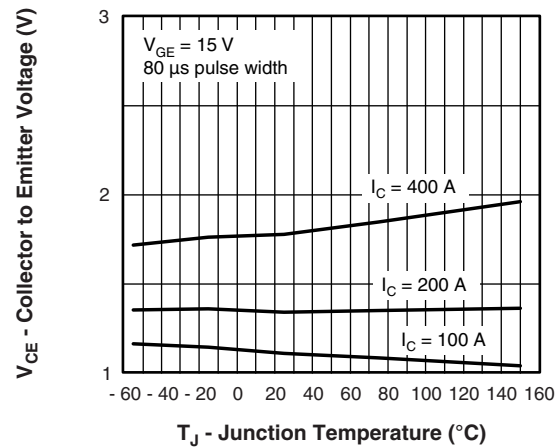


Fig. 5 - Typical Collector to Emitter Voltage vs. Junction Temperature

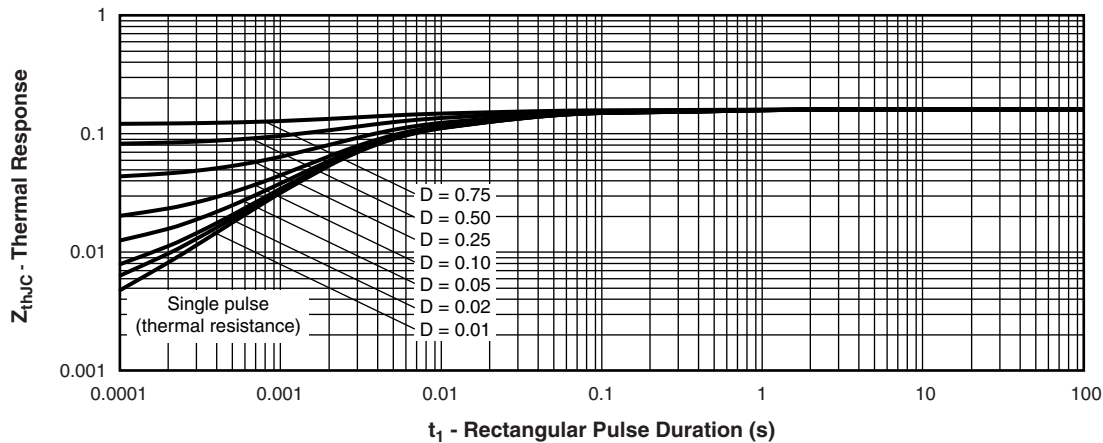


Fig. 6 - Maximum Effective Transient Thermal Impedance, Junction to Case

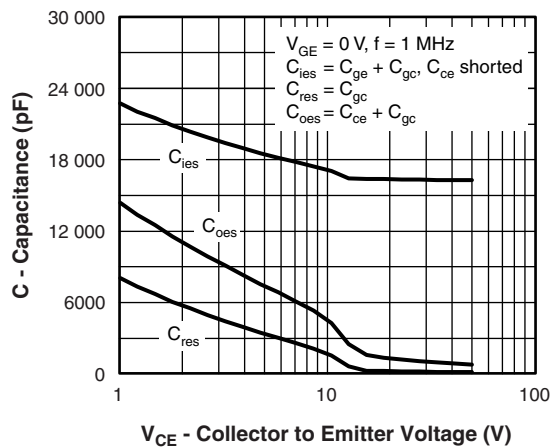


Fig. 7 - Typical Capacitance vs. Collector to Emitter Voltage

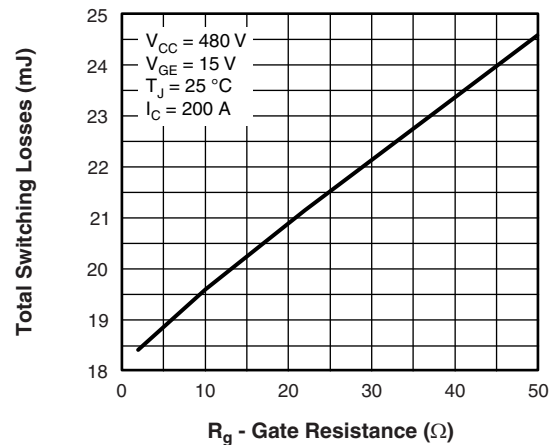


Fig. 9 - Typical Switching Losses vs. Gate Resistance

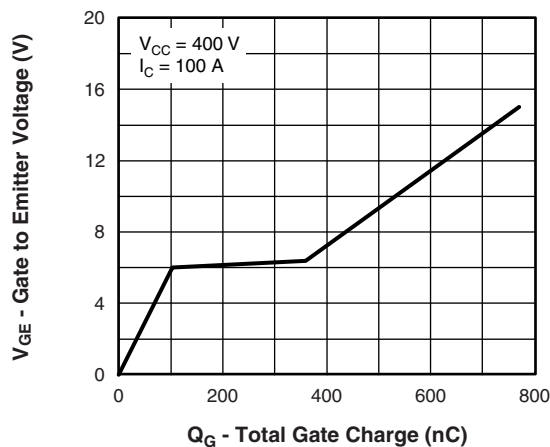


Fig. 8 - Typical Gate Charge vs. Gate to Emitter Voltage

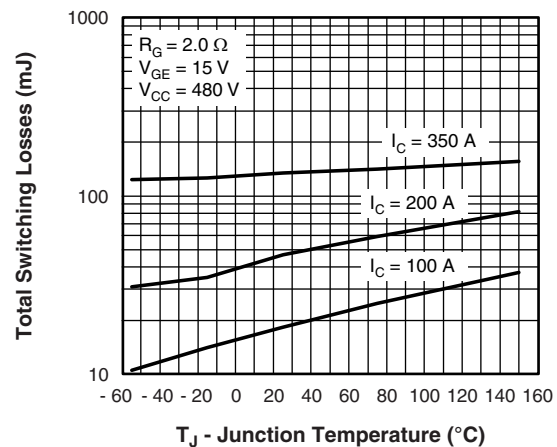


Fig. 10 - Typical Switching Losses vs. Junction Temperature


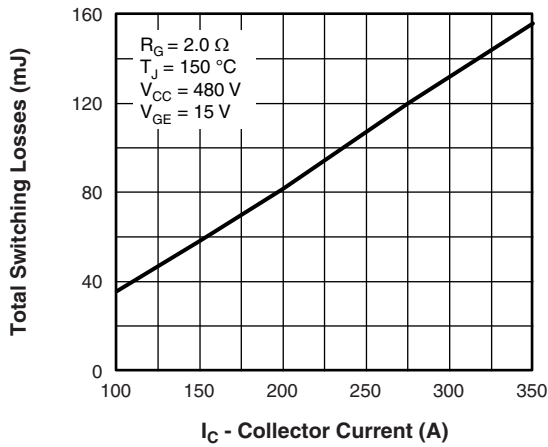


Fig. 11 - Typical Switching Losses vs. Collector Current

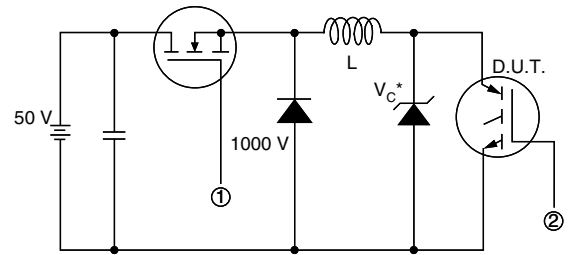

\* Driver same type as D.U.T.;  $V_C = 80\%$  of  $V_{CE}$  (max)

**Note:** Due to the 50 V power supply, pulse width and inductor will increase to obtain rated  $I_d$

Fig. 13a - Clamped Inductive Load Test Circuit

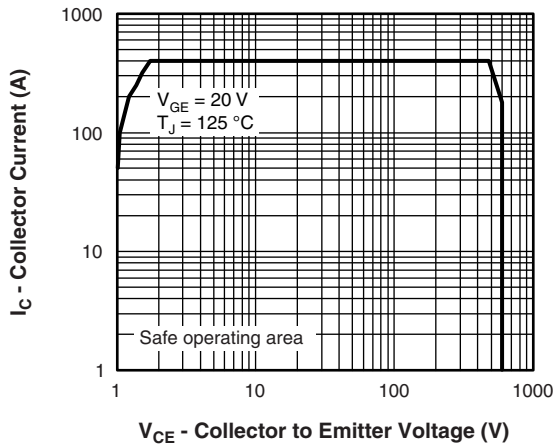


Fig. 12 - Turn-Off SOA


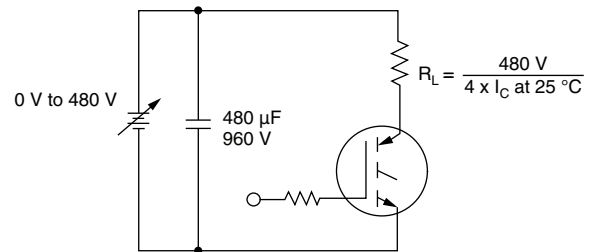


Fig. 13b - Pulsed Collector Current Test Circuit

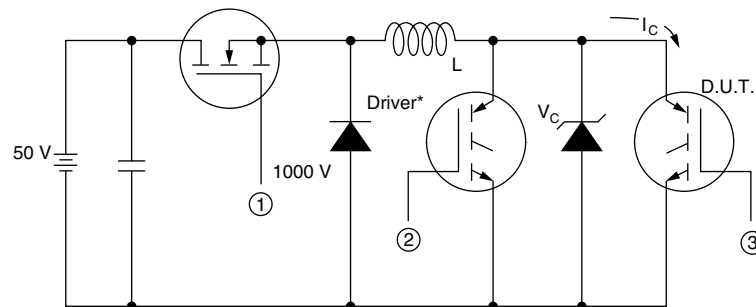

\* Driver same type as D.U.T.,  $V_C = 480$  V

Fig. 14a - Switching Lost Test Circuit

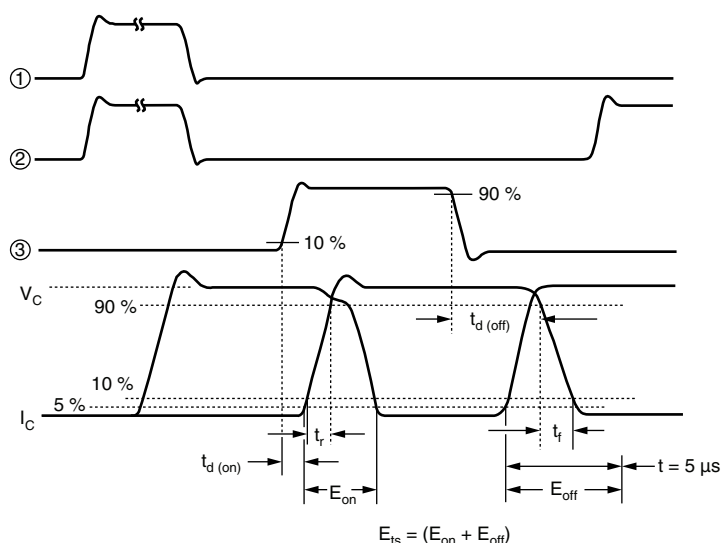



Fig. 14b - Switching Loss Waveforms

## ORDERING INFORMATION TABLE


Device code	G	A	200	S	A	60	S	P
	①	②	③	④	⑤	⑥	⑦	⑧
①	-	Insulated Gate Bipolar Transistor (IGBT)						
②	-	Generation 4, IGBT silicon, DBC construction						
③	-	Current rating (200 = 200 A)						
④	-	Single switch, no diode						
⑤	-	SOT-227						
⑥	-	Voltage rating (60 = 600 V)						
⑦	-	Speed/type (S = Standard speed)						
⑧	-	• None = Standard production						
	-	• P = Lead (Pb)-free						



**CIRCUIT CONFIGURATION**

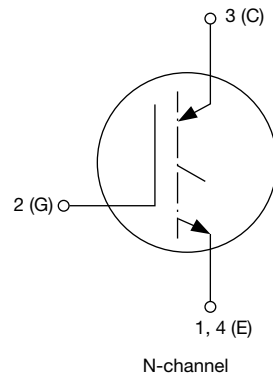

Lead assignment



LINKS TO RELATED DOCUMENTS	
Dimensions	<a href="http://www.vishay.com/doc?95036">www.vishay.com/doc?95036</a>
Packaging information	<a href="http://www.vishay.com/doc?95037">www.vishay.com/doc?95037</a>

**DIMENSIONS** in millimeters (inches)



- Dimensioning and tolerancing per ANSI Y14.5M-1982
- Controlling dimension: millimeter





## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.