

High Current Common Mode Choke



FEATURES

- Surface mountable (multiple case sizes), high current common mode choke for DC power line
- Base terminals are treated, allows for easy mounting on PCB
- Paired wire coil for high stability
- Optimized for transmission of high quality signals
- Operating temperature: -40 °C to +85 °C
- Rated Current: Based on temp. rise; ΔT : 40 °C, typical
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912


**RoHS
COMPLIANT**


APPLICATIONS

- LAN's, telephones, personal computers
- CD-ROM drives, electronic games
- Other electronic devices

STANDARD ELECTRICAL SPECIFICATIONS

PART NUMBER	COMMON MODE IMPEDANCE AT 100 MHz (Ω)	RATED VOLTAGE MAX. (V_{DC})	RATED CURRENT MAX. (mA)	DC RESISTANCE MAX. (Ω)	INSULATION RESISTANCE MIN. (M Ω)
ICM2824ER301V	300	80	5000	0.01	10
ICM2824ER701V	700	80	4000	0.015	10
ICM3528ER701V	700	80	5000	0.01	10
ICM3528ER152V	1500	80	4500	0.015	10
ICM4743ER701V	700	80	8000	0.006	10
ICM4743ER102V	1000	80	6000	0.014	10

DIMENSIONS in inches [millimeters]

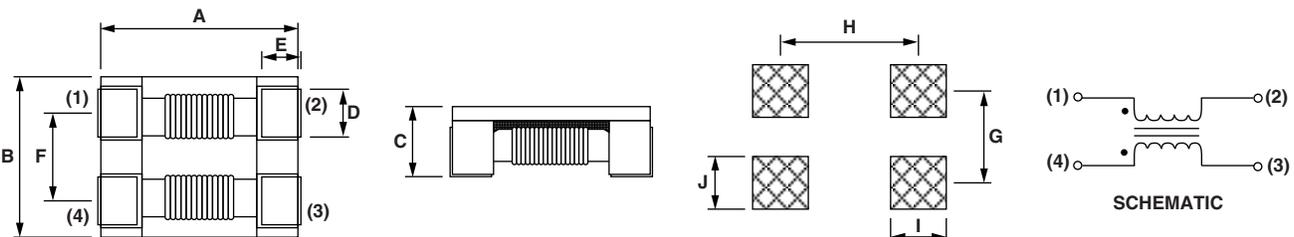


LAND PATTERN

PART NUMBER	A	B	C	D	E	F	G	H	I	J
ICM-2824	0.276 ± 0.012 [7.0 ± 0.3]	0.236 ± 0.008 [6.0 ± 0.2]	0.157 [4.0] max.	0.063 ± 0.012 [1.6 ± 0.3]	0.071 ± 0.012 [1.8 ± 0.3]	0.118 [3.0] typ.	0.118 [3.0] ref.	0.256 [6.5] ref.	0.098 [2.5] ref.	0.063 [1.6] ref.
ICM-3528	0.354 ± 0.020 [9.0 ± 0.5]	0.276 ± 0.012 [7.0 ± 0.3]	0.197 [5.0] max.	0.060 ± 0.008 [1.5 ± 0.2]	0.060 ± 0.008 [1.5 ± 0.2]	0.138 [3.5] typ.	0.138 [3.5] ref.	0.335 [8.5] ref.	0.098 [2.5] ref.	0.071 [1.8] ref.
ICM-4743	0.472 ± 0.20 [12.0 ± 0.5]	0.433 ± 0.012 [11.0 ± 0.3]	0.248 [6.3] max.	0.106 ± 0.008 [2.7 ± 0.2]	0.091 ± 0.008 [2.3 ± 0.2]	0.205 [5.2] typ.	0.205 [5.2] ref.	0.374 [9.5] ref.	0.177 [4.5] ref.	0.106 [2.7] ref.

DESCRIPTION







ICM-3528	700	25 %	ER	e3
MODEL	IMPEDANCE VALUE	TOLERANCE	PACKAGE CODE	JEDEC® LEAD (Pb)-FREE STANDARD

GLOBAL PART NUMBER

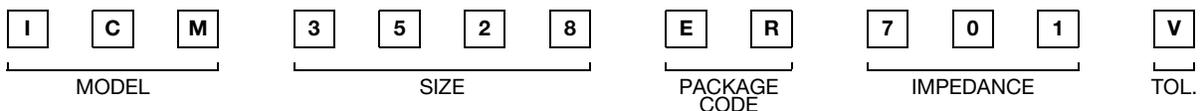



PERFORMANCE GRAPHS: IMPEDANCE VS. FREQUENCY CHARACTERISTICS

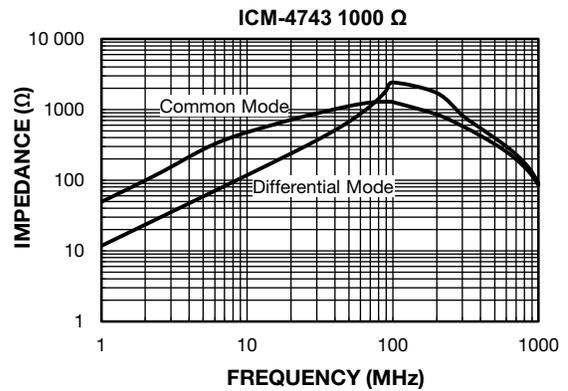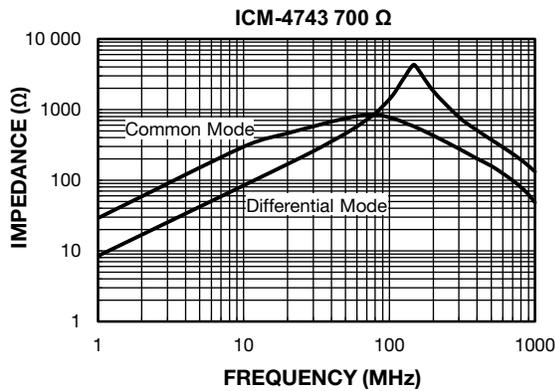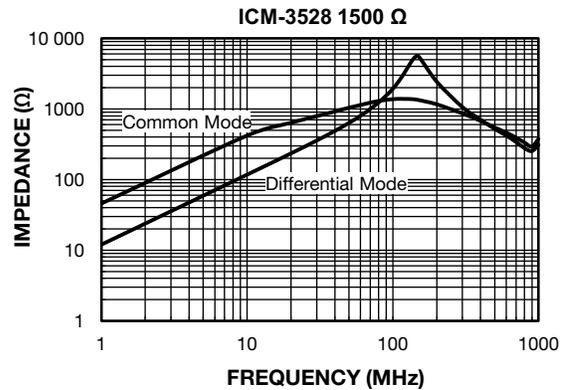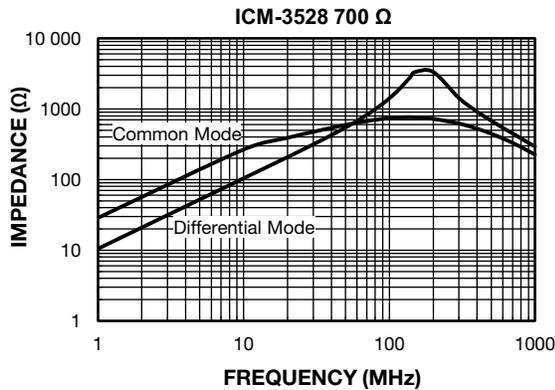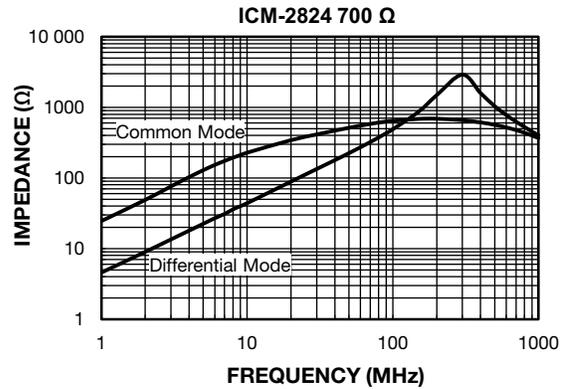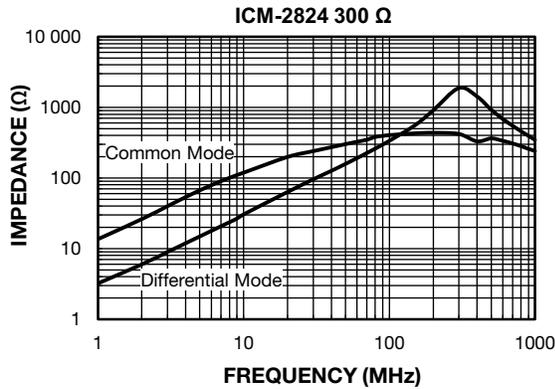



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Material Category Policy

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.

Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Vishay:](#)

[ICM2824ER301V](#) [ICM2824ER701V](#) [ICM3528ER701V](#) [ICM3528ER152V](#) [ICM4743ER701V](#) [ICM4743ER102V](#)