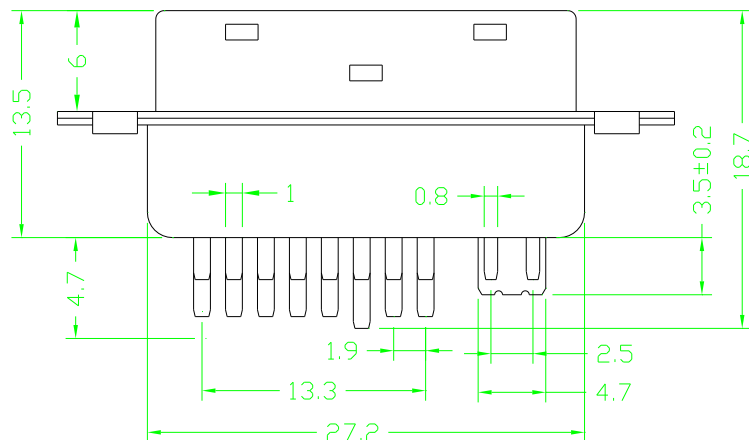


Specifications:

Contact Resistance: 30mΩ max

Insulator Resistance: 1000MΩ min.at DC 500V


Rated Current : 3AMP

Dielectric Withstanding:

Voltage: AC 1000V For 1 minute

Contact: Brass

Housing: PBT &30% Glass Fiber(UL 94V-0)

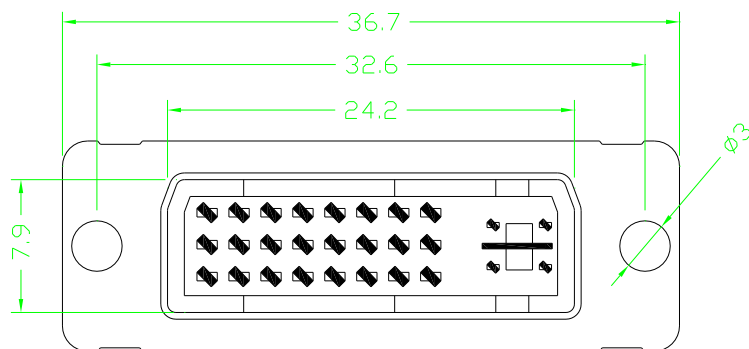

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
				x. ±0.2	x." ±2°
		图名/Title	文件编号/File No.	.x ±0.1	.x" ±1°
		164产品图	QJ/XYT-12128	.xx ±0.05	.xx" ±0.5°
			页序/Sheet		.xxx ±0.01
		备注 /Remark			