

Specifications:

Contact Resistance: 30mΩ max

Insulator Resistance: 1000MΩ min.at DC 500V




Rated Current : 3AMP

Dielectric Withstanding:

Voltage: AC 1000V For 1 minute

Contact: Brass

Housing: PBT &30% Glass Fiber(UL 94V-0)

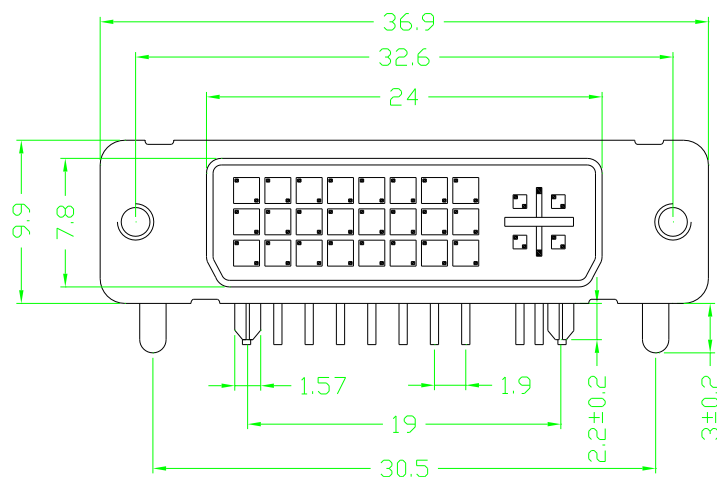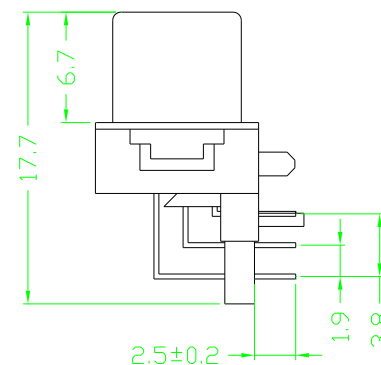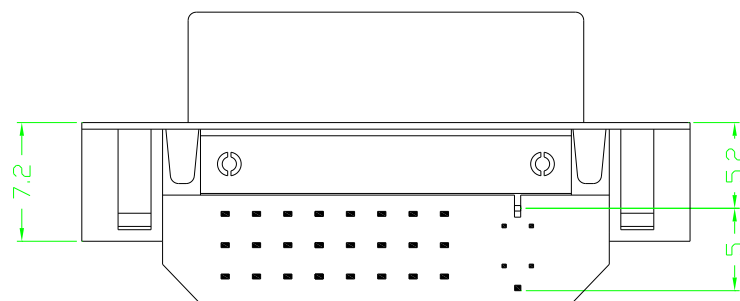

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
				x. ±0.2	x." ±2°
				.x ±0.1	.x" ±1°
				.xx ±0.05	.xx" ±0.5°
				.xxx ±0.01	
				单位/units: mm	